

# Containment Accessories - Dual Sliding Doors

SKU#: ECX-CTMT-12DS-2275, ECX-CTMT-18DS-2275, ECX-CTMT-S12DS-001, ECX-CTMT-T12DS-001



www.enconnex.com  
sales@enconnex.com


Enconnex Dual Sliding Doors are the ideal solution for both cold and hot aisle containment designs. Combining cost-effectiveness with ease of installation, the no threshold design eliminates tripping hazards, and complements data center designs. The Enconnex Containment Dual Sliding Door with auto close feature is available for 4 and 6 feet aisles and different height options.

## APPLICATIONS

- Data Centers
- Lab Environments
- High-density applications
- Energy rebate programs

## PRODUCT FEATURES

- Pre-assembled dual sliding door, fast installation
- No threshold design prevents tripping
- Perimeter compression gaskets efficiently seal and minimize air leakage.
- Auto holds when doors fully open and auto close when doors are not fully open.

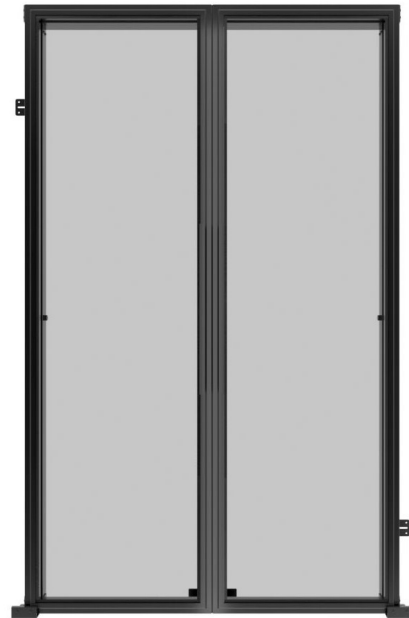

PHYSICAL SPECIFICATIONS	ECX-CTMT-12DS-2275	ECX-CTMT-18DS-2275	ECX-CTMT-12DS-001	ECX-CTMT-T12DS-001
Physical Dimensions (inch/mm)	89.6" x 55.2" x 5" (2275 x 1402 x 127 mm)	89.6" x 75.9" x 5.7" (2275 x 1929 x 144 mm)	85.6" x 55.2" x 5" (2175 x 1402 x 127 mm)	98" x 55.2" x 5" (2490 x 1402 x 127 mm)
Net Weight (lbs/kg)	187.4 lbs (85 kg)	253.5 lbs (115 kg)	231.5 lbs (105 kg)	253.5 lbs (115 kg)
Shipping Dimensions (inch/mm)	90.6" x 57.3" x 16.9" (2300 x 1455 x 430 mm)	90.6" x 57.3" x 19.7" (2300 x 1455 x 500 mm)	88.2" x 55.1" x 16.9" (2240 x 1400 x 430 mm)	100" x 55.1" x 16.9" (2540 x 1400 x 430 mm)
Shipping Weight (lbs/kg)	551.1 lbs (250 kg)	683.4 lbs (310 kg)	639.3 lbs (290 kg)	683.4 lbs (310 kg)
Cabinet Size	48U	48U	42U, 45U	48U, 52U
Aisle Width	1200 mm, 4 ft	1800 mm, 6 ft	1200 mm, 4 ft	1200 mm, 4 ft
Color	Black	Black	Black	Black
Cycle Times	10000	10000	10000	10000
Moving Style	Semi-Auto close, Open hold	Semi-Auto close, Open hold	Semi-Auto close, Open hold	Semi-Auto close, Open hold
Shipping	2pcs per pallet	2pcs per pallet	2pcs per pallet	2pcs per pallet

