

Basic PDU

SKU#: ECX-BV1730000-T

The ECX-BV1730000-T basic PDU distributes power to devices in the rack configured with premium, high-temperature, branch-rated, hydraulic-magnetic circuit breakers. Numbered outlets and circuit breakers allow easy identification of circuit configuration for reduced connectivity errors. Ultra-low-profile design reduces space when installed in the IT cabinet and improves airflow efficiency. The outlet layout is designed to alternate small groups of outlets by circuit breaker along the length of the PDU for improved load balancing. The alternating-phase outlets allow for better load balancing and more efficient power distribution.

PRODUCT FEATURES

- Premium, high-temperature, branch-rated, magnetic hydraulic circuit breakers
- Ultra-Low-profile design
- Alternate-branched outlets
- High Density outlet arrangement

APPLICATIONS

- Environments that require energy metering
- Colocation facilities
- MDF, IDF, Data Center, Computer Room, Data Room Environment

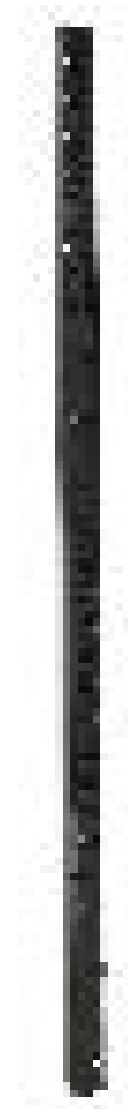


Figure 1 - Basic PDU - ECX-BV1730000-T

SPECIFICATIONS

ELECTRICAL		SPECS
Acceptable Input Voltage	220/380-240/415 VAC, +6%, -10%	
Input Current (Phase)	30A (3 phase)	
Input Frequency	50/60 Hz	
Input Power	17.3 kVA	
Input Plug	IEC 60309 3P+N+PE 30A 6hr Red (IP67)	
Rated Output Current (Phase)	24A (3 phase)	
Rated Output Current (Outlet)	C13: 12A	
Overload Protection (Internal)	(6) 20A, 1-pole, 5kAIC	
Outlet Configuration	Total: (30)C13 Alternating-Phase	

PHYSICAL		SPECS
Dimensions	68.5" x 2.25" x 2" (1740 x 57 x 51 mm)	
Depth at Circuit Breaker, in (mm)	2.36" (60 mm)	
Input Cord Length, ft (m)	10' (3m)	

ENVIRONMENTAL	OPERATING	STORAGE
Maximum Elevation, Above MSL	0-10,000 ft / 0-3,000 m	0-50,000 ft / 0-15,000 m
Temperature	23 to 140°F / -5 to 60°C	-13 to 149°F / -25 to 65°C
Outlet Level Metering	5-95% RH non-condensing	5-95% RH non-condensing

COMPLIANCE/STANDARDS	SPECS
EMC Compliance	N/A
Safety Compliance	UL, cUL, IEC/UL 60950-1, UL/IEC 62368-1, CE-LVD
Environmental	RoHS

WARRANTY	Duration
PDU Warranty	5 Years

