



REV	REV DATE	DESCRIPTION	APPROVAL
A	10/31/2019	RELEASE	KP/RF

**Notes/Instructions:**



- 1.ALL PARTS MUST BE ROHS COMPLIANT.
- 2.TEMP RATING MUST 105° C MINIMUM.
- 3.DIAMETER OF CORDAGE MUST BETWEEN 8.3mm to 8.6mm.
- 4.CORD TYPE, WIRE GUAGE, TEMP RATING, UL,CUL APPROVAL MUST BE EXIBITED ON OUTER COVERING OF POWER CORD.
- 5.LENGTH IDENTIFIED BY x IN (FT) OR M IS CONTAINED WITHIN THE PART NUMBER.  
EXAMPLE ECX-C14C15-16AWG-3FT(2M)

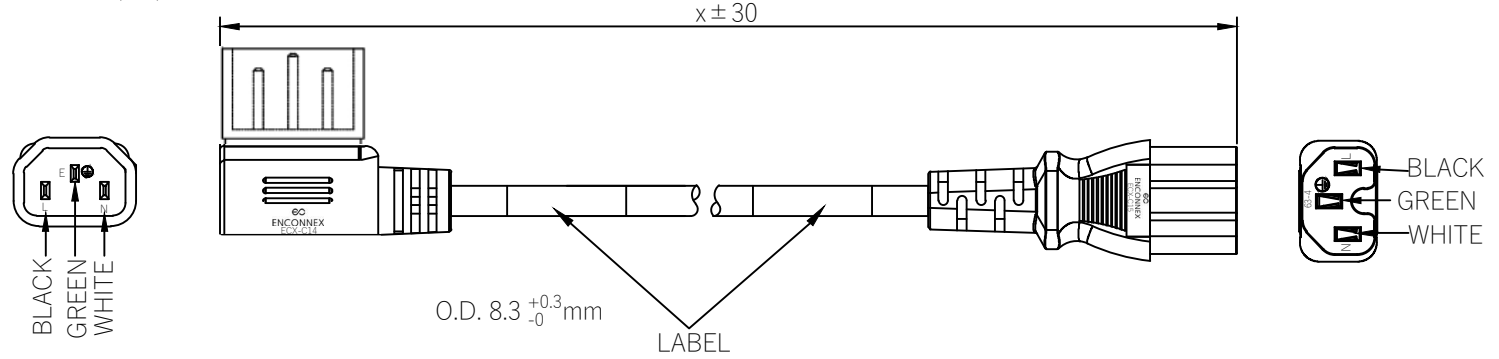

**MARKING:**



**MARKING:**

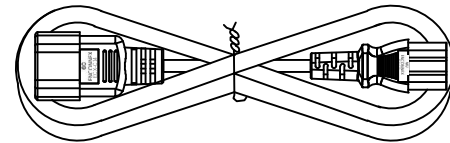

**Notes:**

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL: PVC	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-C20C13-14AWG-X-90R
	FINISH:		DESCRIPTION: C20/C13 SJT 16AWG 3C BK 105°C 300V VW-1
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: KOMAL PARAB APPROVED BY: R. FAULKNER	ORG DATE: 10/31/2019	REV DATE: 10/31/2019
UNITS: mm [in]		INTERPRET TO ASME Y14.100	SIZE: A4
		SHEET: 1/1	REV: A