



Notes/Instructions:


REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-06-19	RELEASE	

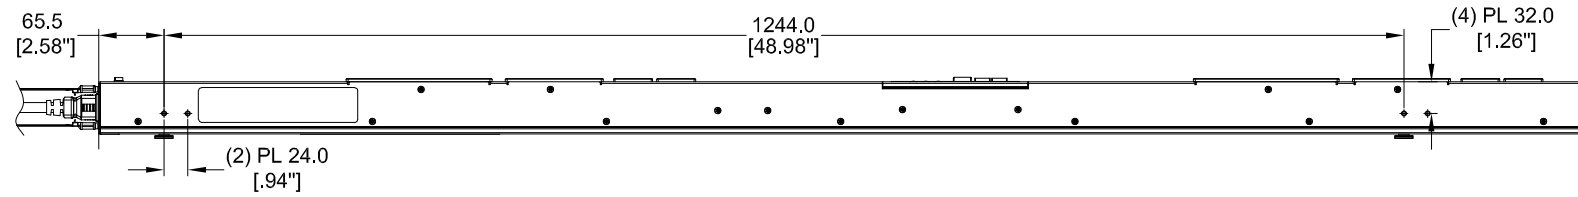

BOTTOM VIEW

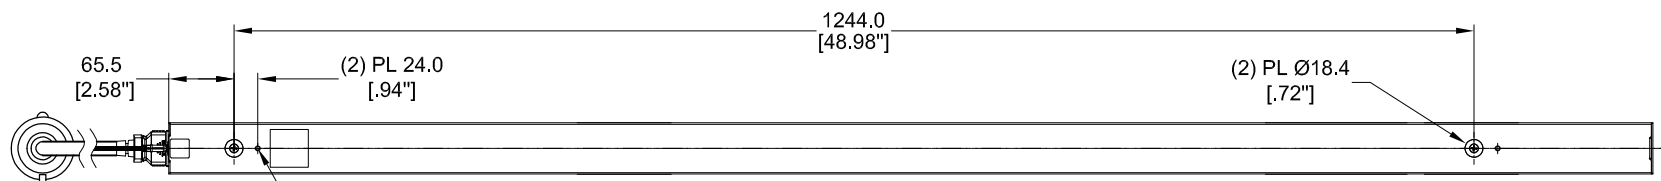


REAR VIEW

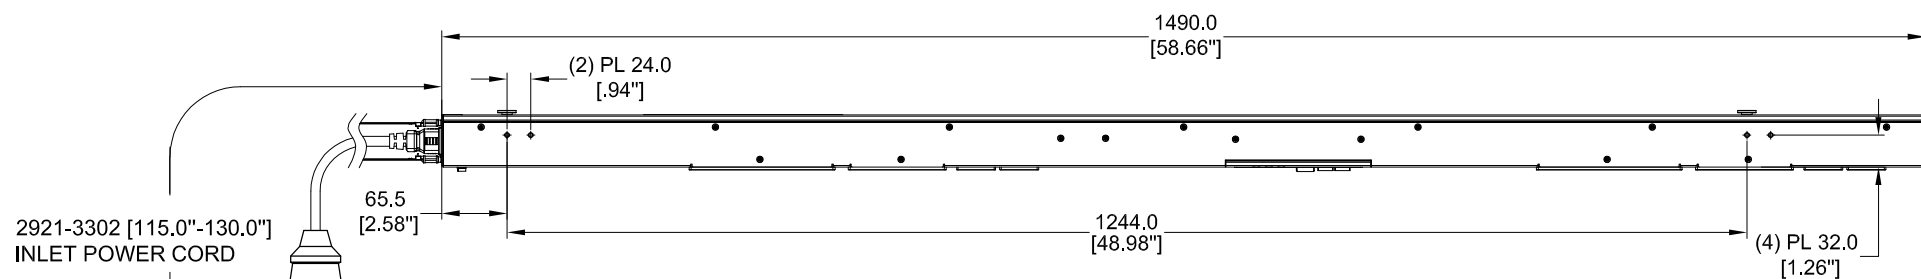

TOP VIEW



FRONT VIEW




SIDE VIEW

**SPECIFICATION:**

**1. STANDARD:**

UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, MID
OUTLET QTY&TYPE:	(20) C13, (4) C19
INPUT VOLTAGE:	100-240VAC
INPUT CURRENT:	16A
BREAKER QTY&TYPE:	N/A
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	3.7kVA
INPUT PLUG:	IEC 60309 2P+E 6H 16A
INPUT POWER CORD:	3m [10'], TOP FEED
REGULATORY STANDARD:	RoHS COMPLIANT

2921-3302 [115.0"-130.0"]  
INLET POWER CORD



**PLUG/RECEPTACLE BLOCK**



PLUG  
IEC 60309, 2P 3W, 6H  
IP44 (SPASHPROOF)  
16A, 250V MAX RATED INPUT



RECEPTACLES  
IEC 60320/C19  
16A, 250V MAX RATED OUTPUT



RECEPTACLES  
IEC 60320/C13  
10A, 250V MAX RATED OUTPUT

**Notes:**


This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ±1 X.X = ±0.5 X.XX = ±0.30 X.XXX = ±0.130 ANGULAR X° = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-MV1120040-N
	DESCRIPTION:		DESCRIPTION: 240V/16A, Single Phase, 24 outlets, 20 C13, 4 C19, IEC 60309
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: Leo Liu	ORG DATE: 2019-06-19
UNITS: mm [in]	INTERPRET TO ASME Y14.100	APPROVED BY: R. FAULKNER	REV DATE:
		SIZE: A2	SCALE: 1 : 1
			SHEET: 1/2
			REV: A

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-06-19	RELEASE	



Notes/Instructions:

NOTES:  
 1. INTERNAL WIRING:  
 WIRE TYPE: UL AWM 1015, 12 & 18AWG  
 LINE 1/R/X COLOR: BROWN  
 EARTH GROUND COLOR: GREEN/YELLOW STRIPE  
 NEUTRAL WIRE COLOR: BLUE

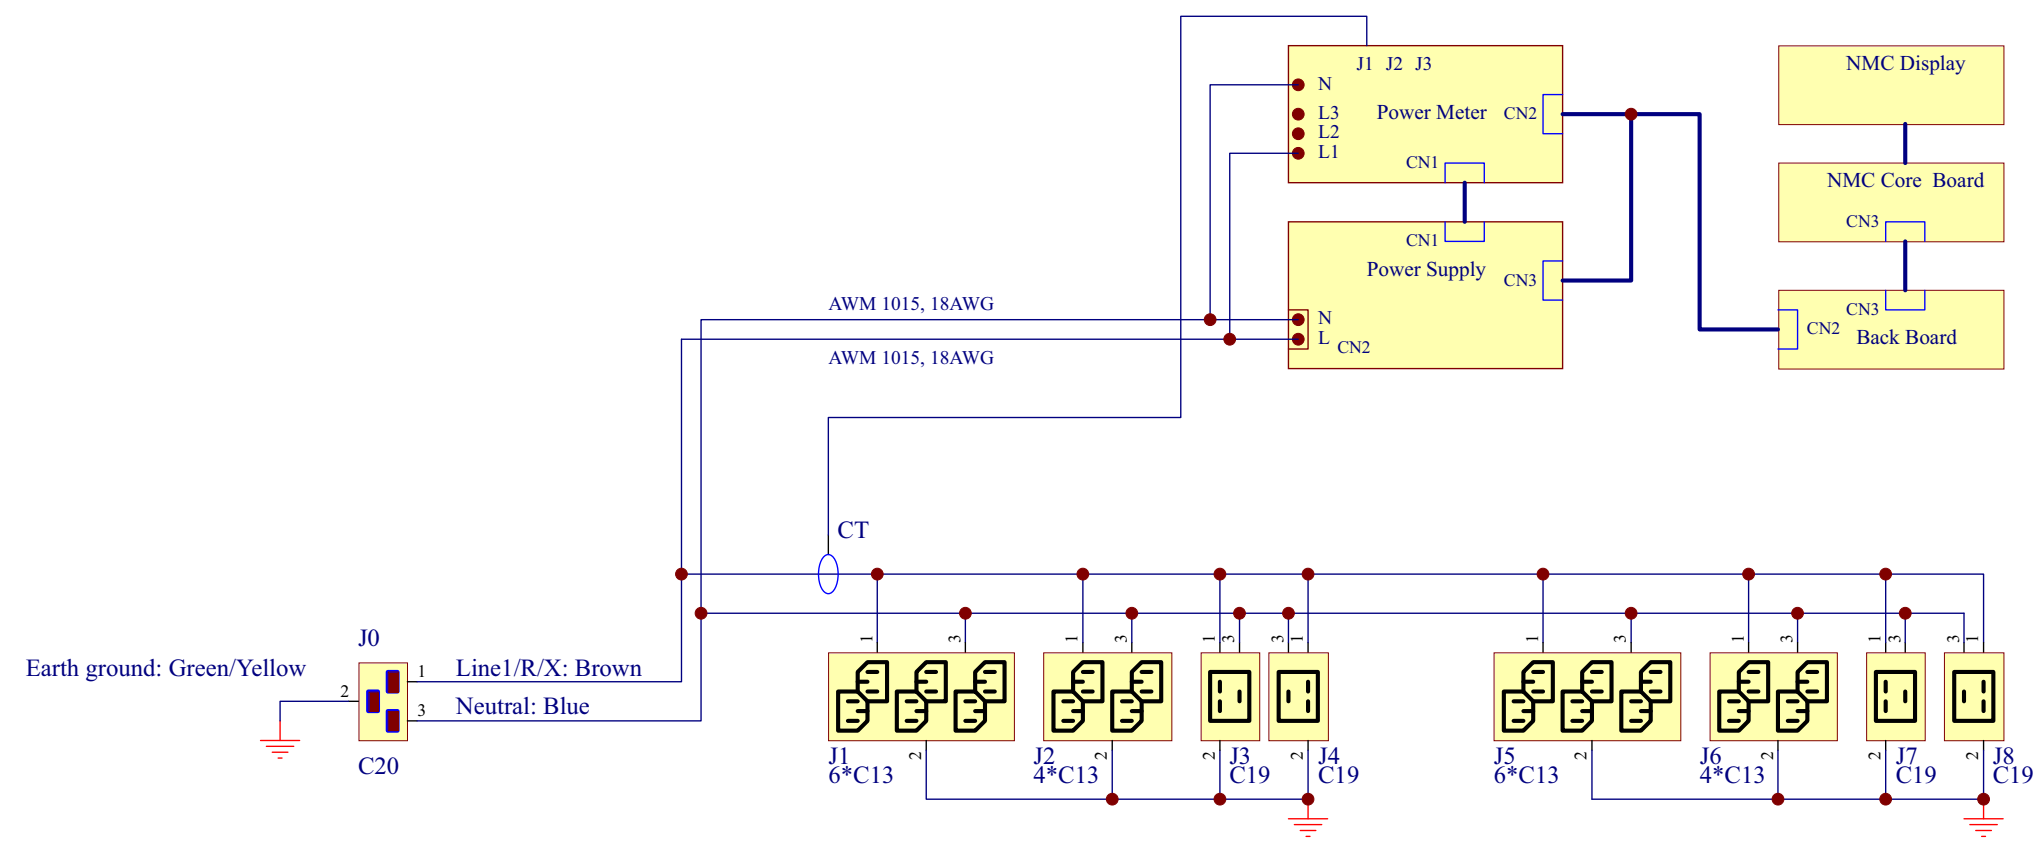

INTERNAL WIRING SCHEMATIC

Notes:  
 This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 ENCONNEX 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-MV1120040-N
	DESCRIPTION:		DESCRIPTION: Wiring Scheme
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: Jing Zhang	ORG DATE: 2019-06-19	
	APPROVED BY: R. FAULKNER	REV DATE:	
UNITS: mm [in]	INTERPRET TO ASME Y14.100	SIZE: A4	SCALE: 1 : 1
		SHEET: 2/2	REV: A