

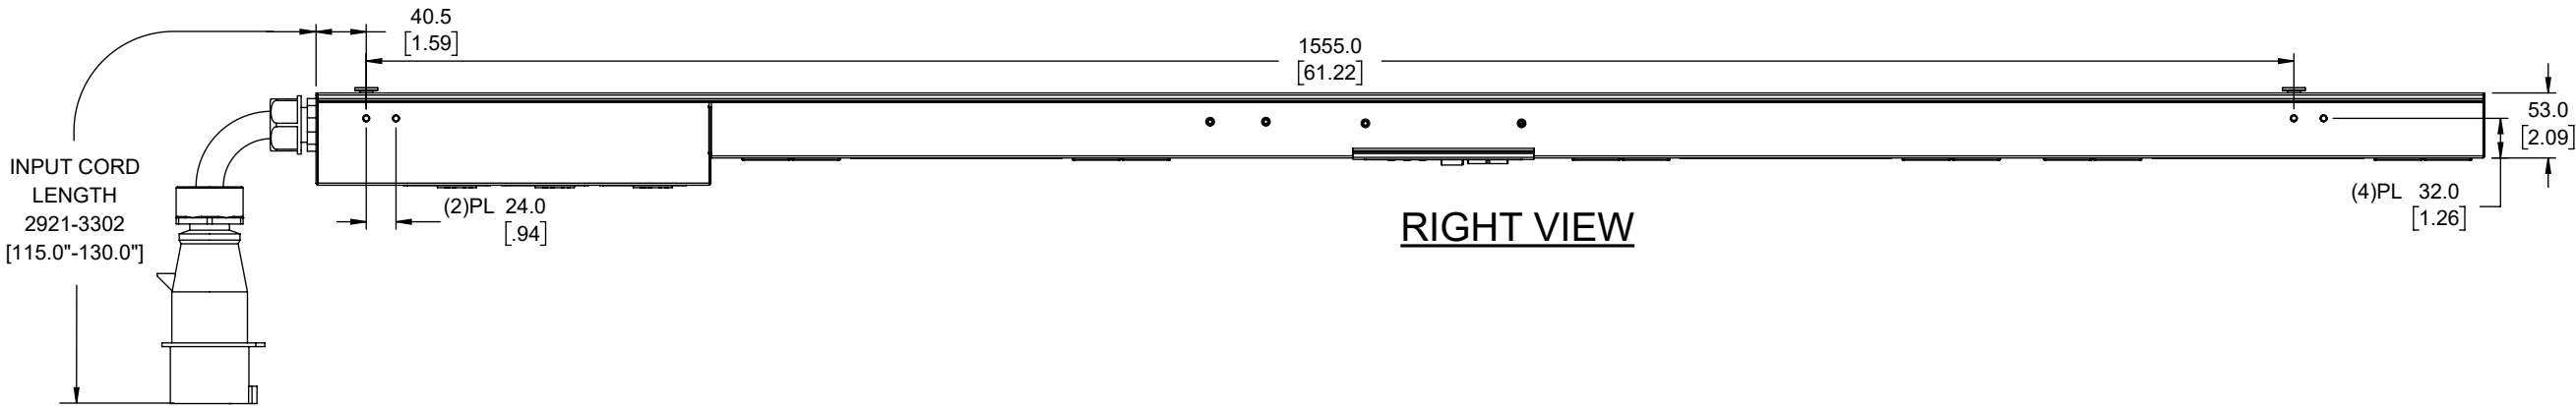
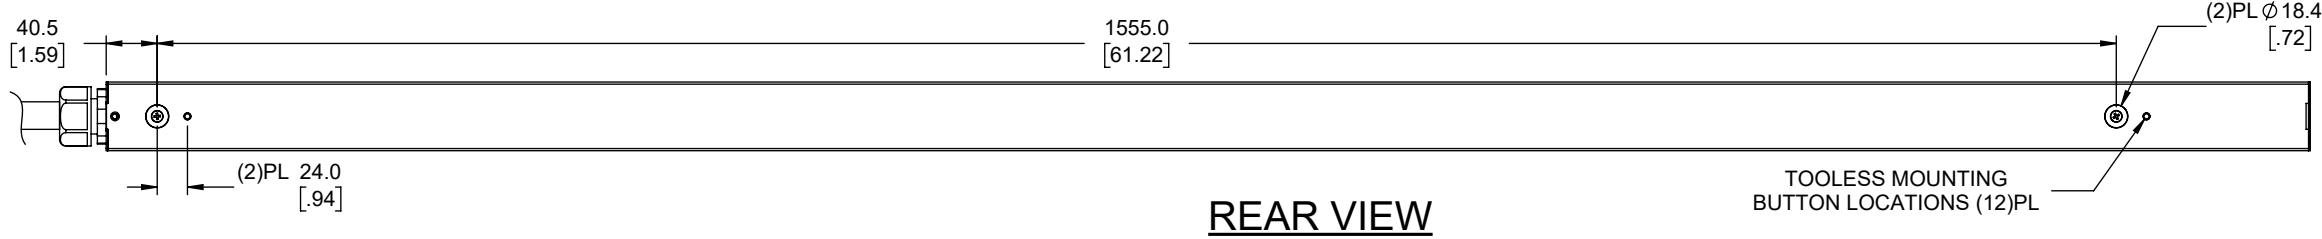
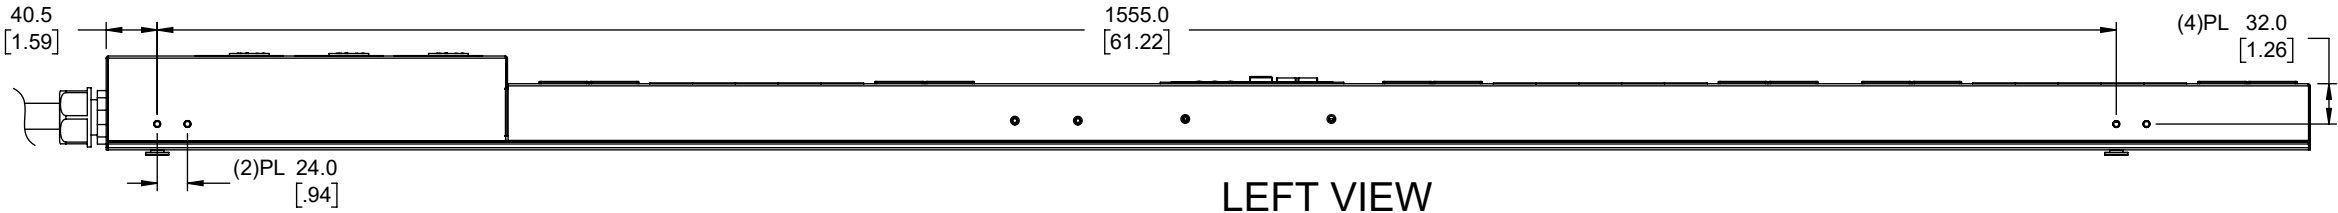


Notes/Instructions:

| REV | REV DATE   | DESCRIPTION | APPROVAL |
|-----|------------|-------------|----------|
| A   | 2020-06-03 | RELEASE     | SD/RF    |



20AMP 10KAIC, SINGLE-POLE ELECTRO  
MECHANICAL SWITCH / BREAKER (3)PL

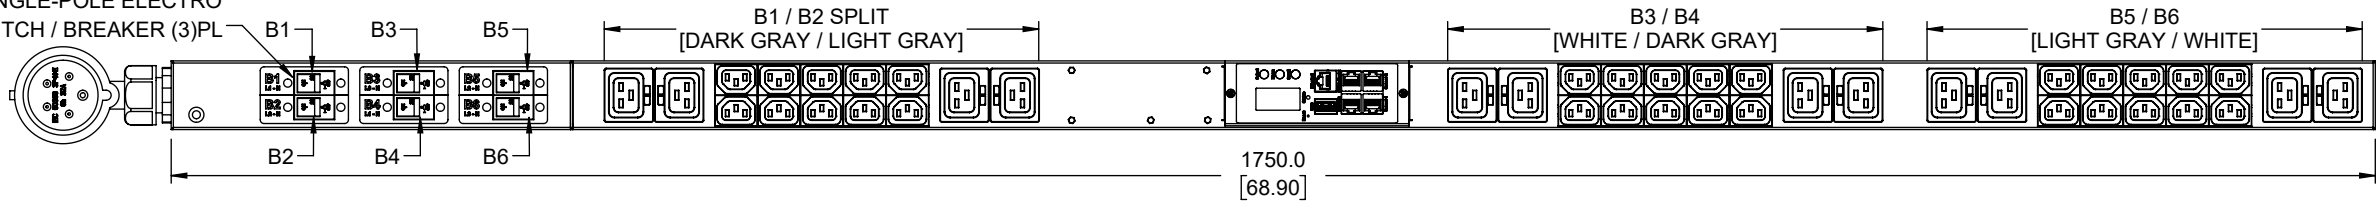

### PLUG/RECEPTACLE BLOCK



PLUG  
IEC 60309, 4P 5W, 6H  
IP44 (SPLASHPROOF)  
30A / 32A, 346-415V MAX RATED INPUT  
(24A DERATED)



RECEPTACLES  
IEC 60320/C19  
16A, 250V MAX RATED OUTPUT



RECEPTACLES  
IEC 60320/C13  
10A, 250V MAX RATED OUTPUT

UNIT TYPE:  
ORIENTATION:  
OUTLET QTY & TYPE:  
INPUT VOLTAGE:  
INPUT CURRENT:  
BREAKER QTY & TYPE:  
INPUT PHASE:  
RATED POWER:  
INPUT PLUG:  
INPUT POWER CORD:  
REGULATORY STANDARD:

INPUT METERED  
VERTICAL, 0U FULL  
(30)C13, (12)C19  
400-415VAC  
30A (24A DERATED) / 32A  
(6) 20AMP, SINGLE-POLE 10KAIC  
THREE-PHASE (DUAL RATED)  
17.3 kVA (NAM) / 22.1 kVA (EMEA)  
IEC 60309 532P6 IP44  
3m[10'], TOP FEED  
RoHS COMPLIANT

Notes:  
This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

|                                                                                                                                          |                                                     |                                              |                                 |        |
|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|----------------------------------------------|---------------------------------|--------|
| TOLERANCES<br>LINEAR (mm)<br>X = ± 1<br>X.X = ± 0.5<br>X.XX = ± 0.30<br>X.XXX = ± 0.130<br>ANGULAR<br>X = 1°<br>.X = 0.5°<br>.XX = 0.25° | MATERIAL:                                           | <br>4670 AIRCENTER CIRCLE,<br>RENO, NV 89502 | PART NUMBER:<br>ECX-MV1730121-T |        |
|                                                                                                                                          | DESCRIPTION:                                        |                                              | DESCRIPTION:                    |        |
|                                                                                                                                          | DEBUR AND BREAK SHARP<br>EDGES/CORNERS AT 0.2mm MAX | DRAWN BY: huang                              | ORG DATE: 2020-06-03            |        |
|                                                                                                                                          | INTERPRET TO ASME Y14.100                           | APPROVED BY: Hanson                          | REV DATE: 2020-06-03            |        |
| UNITS: mm [in]                                                                                                                           | SIZE: B                                             | SCALE: 1 : 1                                 | SHEET: 1/2                      | REV: A |

Notes/Instructions:

| REV | REV DATE   | DESCRIPTION | APPROVAL |
|-----|------------|-------------|----------|
| A   | 2020-06-03 | RELEASE     | SD/RF    |

Internal Wire Type: UL AWM 1015, 10/12/18AWG

LINE 1/R/X COLOR: BROWN  
LINE 2/S/Y COLOR: BLACK  
LINE 3/T/Z COLOR: WHITE  
EARTH GROUND COLOR: GREEN/YELLOW STRIPE  
NEUTRAL WIRE COLOR: BLUE

