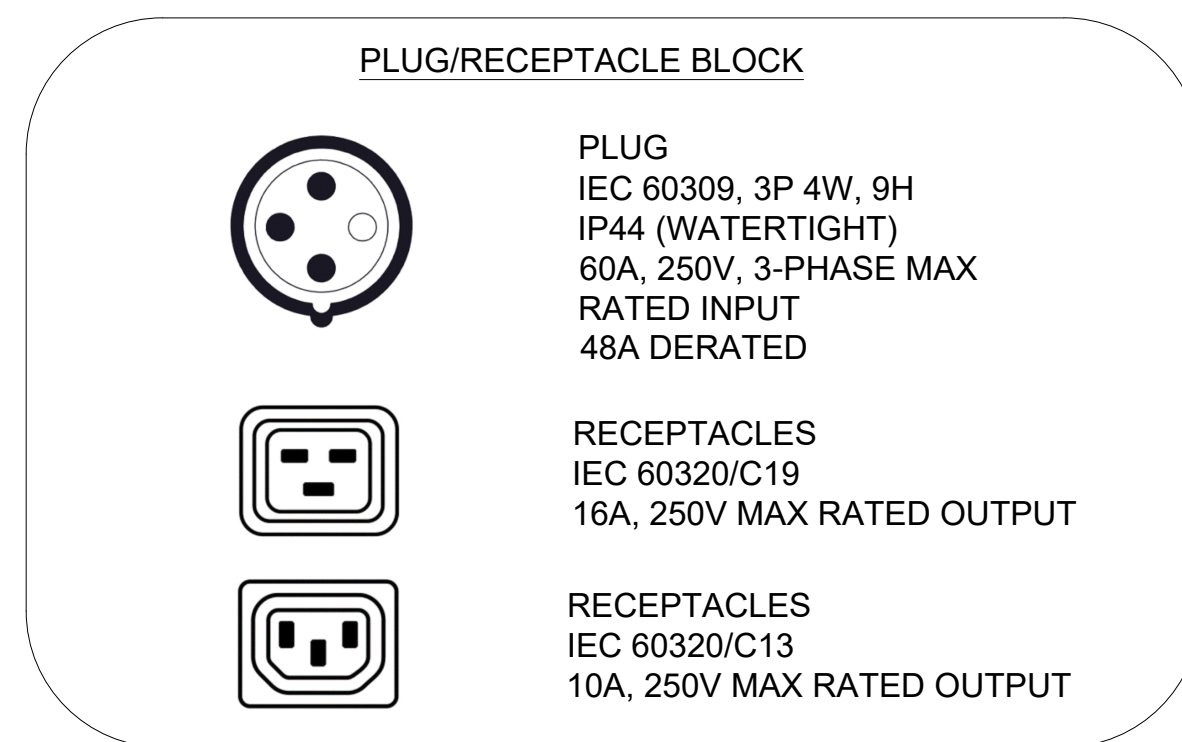
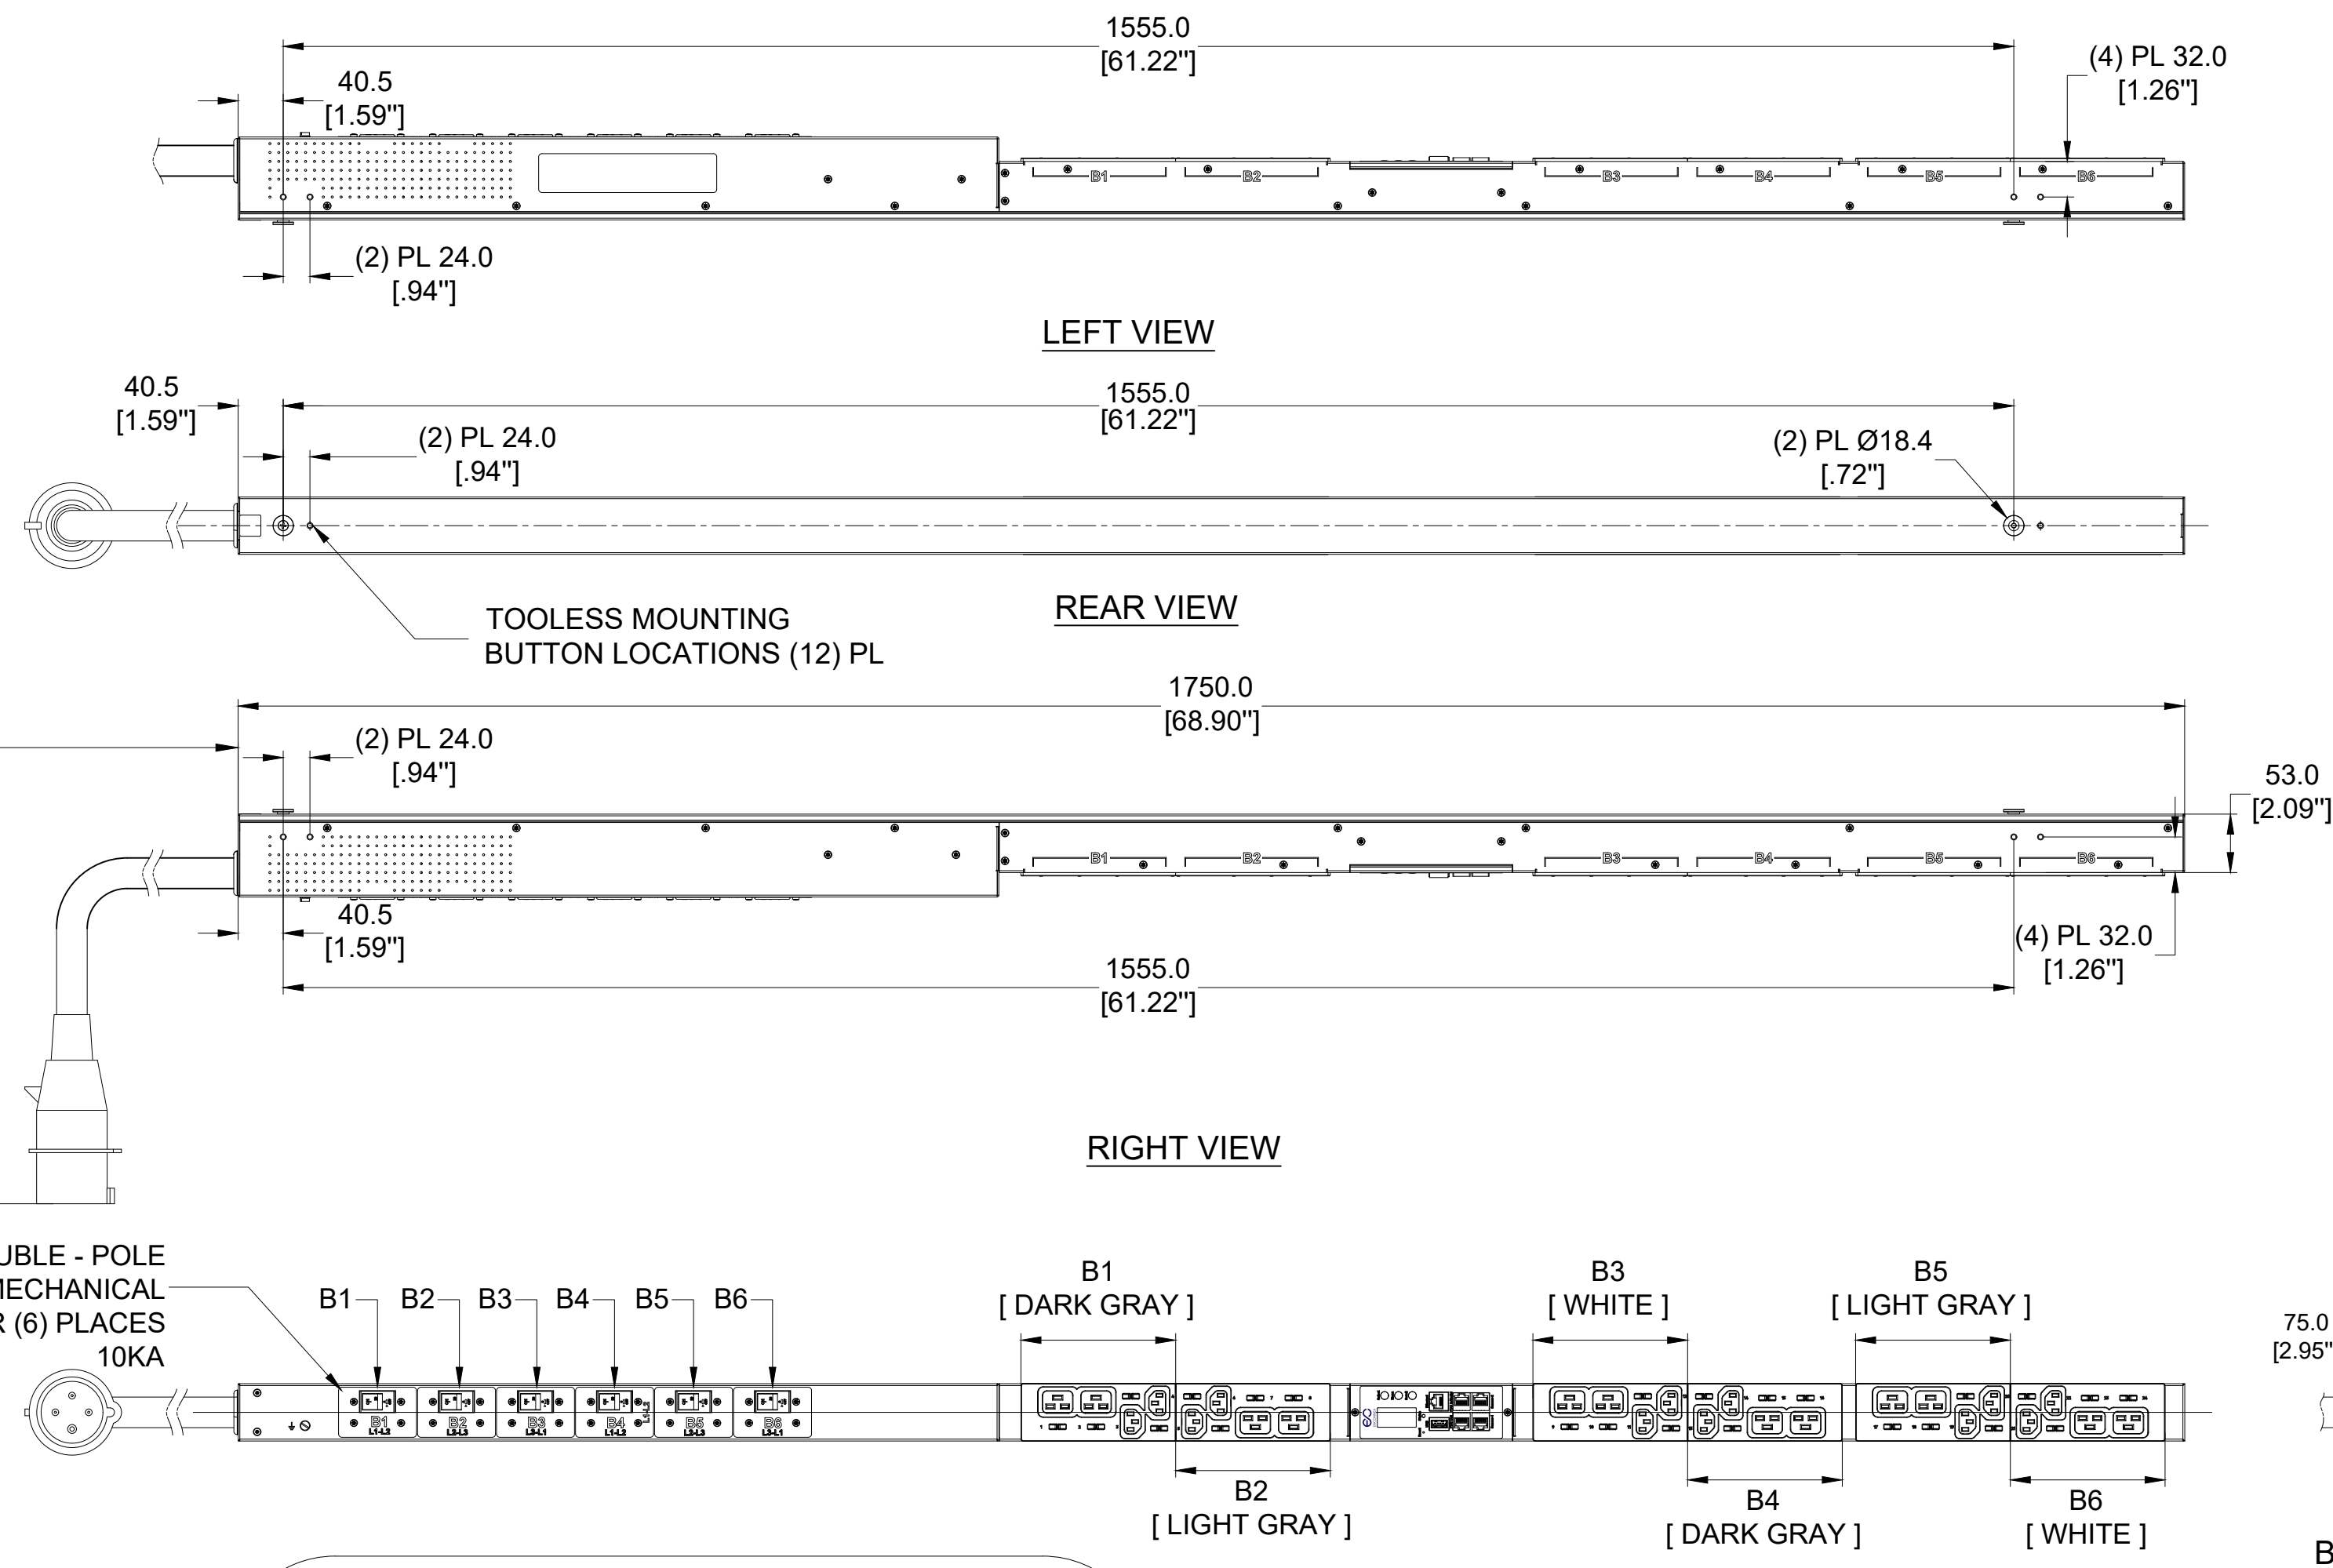




REV	REV DATE	DESCRIPTION	APPROV.
A	2019-04-23	RELEASE	



FRONT VIEW

UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(12) C13, (12) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	60 (48A DERATED)
BREAKER QTY&TYPE:	(6) 20AMP, DOUBLE-POLE, 10KA
INPUT PHASE:	THREE-PHASE, DELTA
RATED POWER:	17.3kVA
INPUT PLUG:	IEC 60309 3P+E 9H 60A
INPUT POWER CORD:	3m[10"], TOP FEED
REGULATORY STANDARD:	RoHS COMPLIANT

TOLERANCES LINEAR (mm) X ± 1 X.X ± 0.5 X.XX ± 0.30 X.XXX ± 0.10 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-PV1812120-L
DESCRIPTION:	DESCRIPTION: 23BV/GSA, 3 Phase, Strip Metered/Outlet, 12 C13/12 C14 1x20A 10kAIC breakers		
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX INTERPRET TO ASME Y14.100	DRAWN BY: Leo Liu	ORG DATE: 2019-04-23	
[UNITS: mm (in)]	APPROVED BY: F. RAULKNER	REV DATE:	SHEET: _____ REV: _____
	SIZE: A2 SCALE: 1:1		

Notes:
This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

Notes/Instructions:

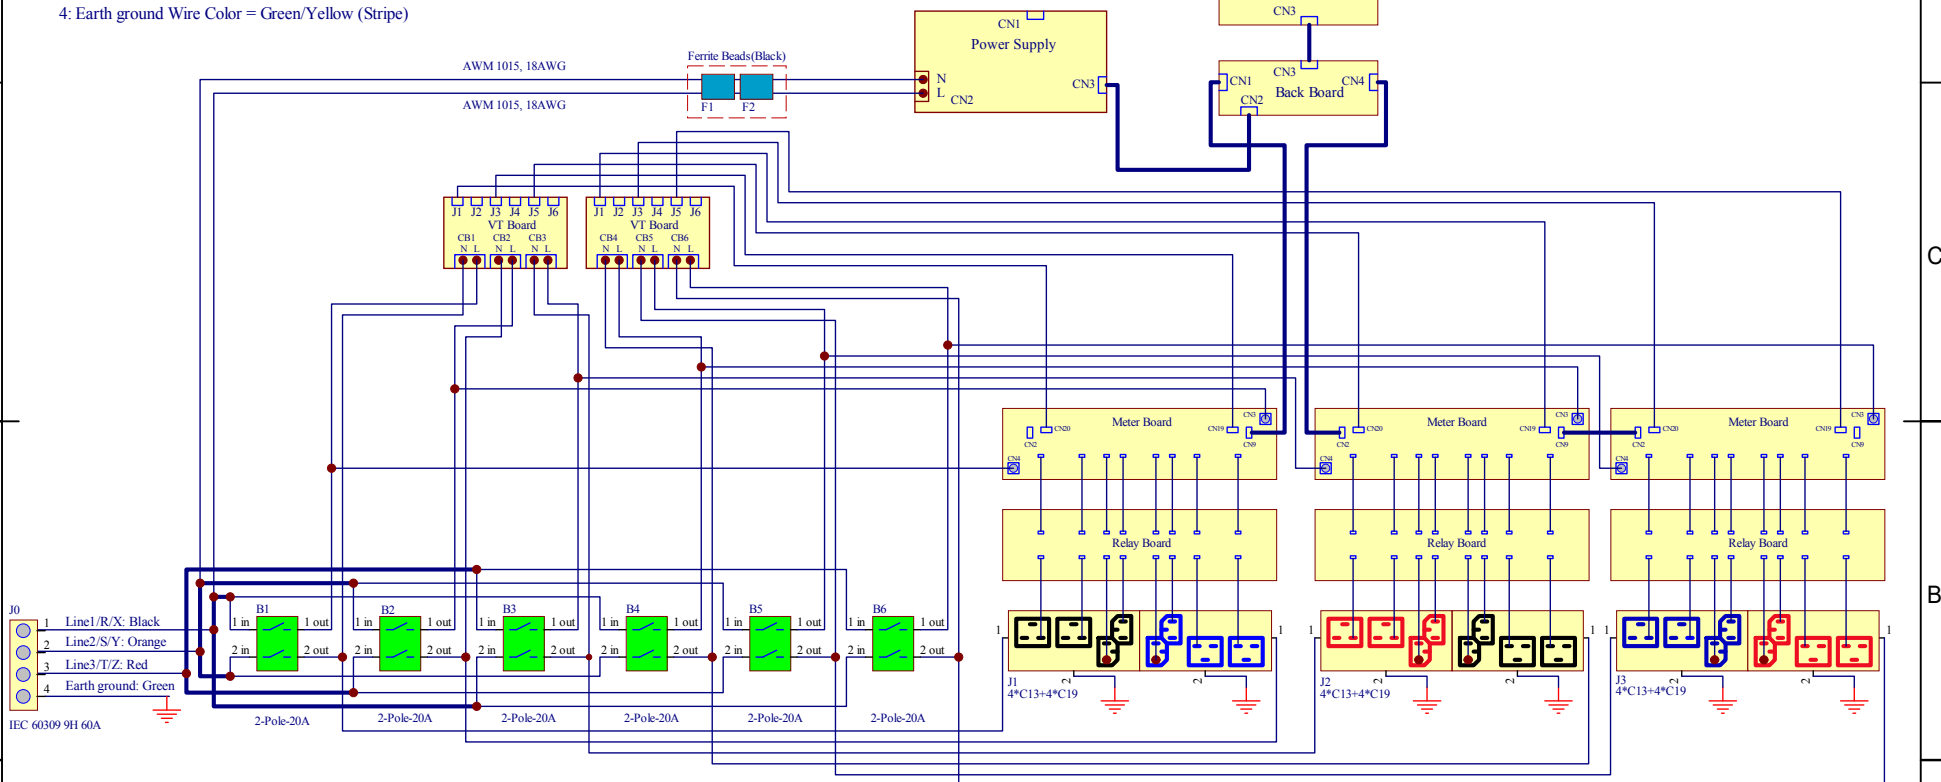
ECX-PV1812120-L

Input Cable Type: Type SOOW; 90°C; 600V; 6AWG; 4C

Internal Wire Type: UL AWM 1015, 105°C, 10/12/18AWG

- 1: Line1/R/X Wire Color = Black
- 2: Line2/S/Y Wire Color = Orange
- 3: Line3/T/Z Wire Color = Red
- 4: Earth ground Wire Color = Green/Yellow (Stripe)



Input main Ground Terminal: KST,RNBS14-6 or equivalent
CB Terminal: KST,RNYD5-5
Outlet Ground Terminal: KST,RNYDL5-4
Internal Wires (N and G Wire) are soldered to Outlet Terminal



Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-04-24	RELEASE	

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-PV1812120-L
	DESCRIPTION:		DESCRIPTION: Wiring Scheme
 UNITS: mm [in]	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: SAM DING	ORG DATE: 2019-04-24
	INTERPRET TO ASME Y14.100	APPROVED BY: R. FAULKNER	REV DATE:
SIZE: A4		SCALE: 1 : 1	SHEET: 1/1
			REV: A