

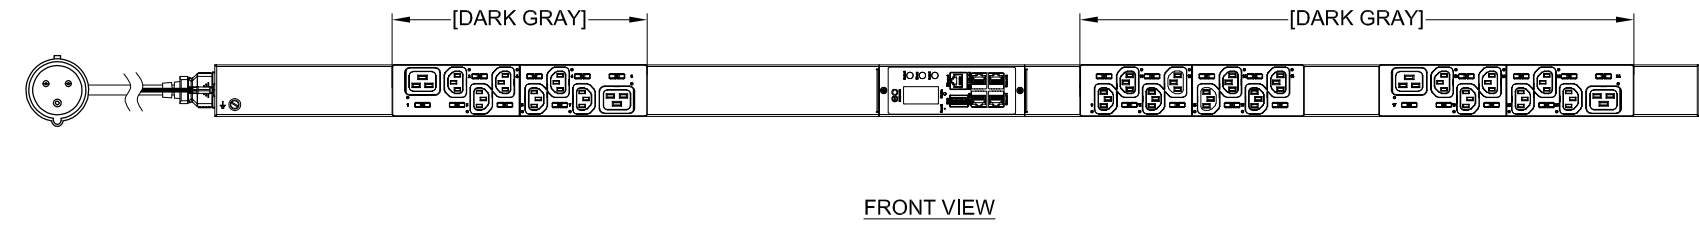
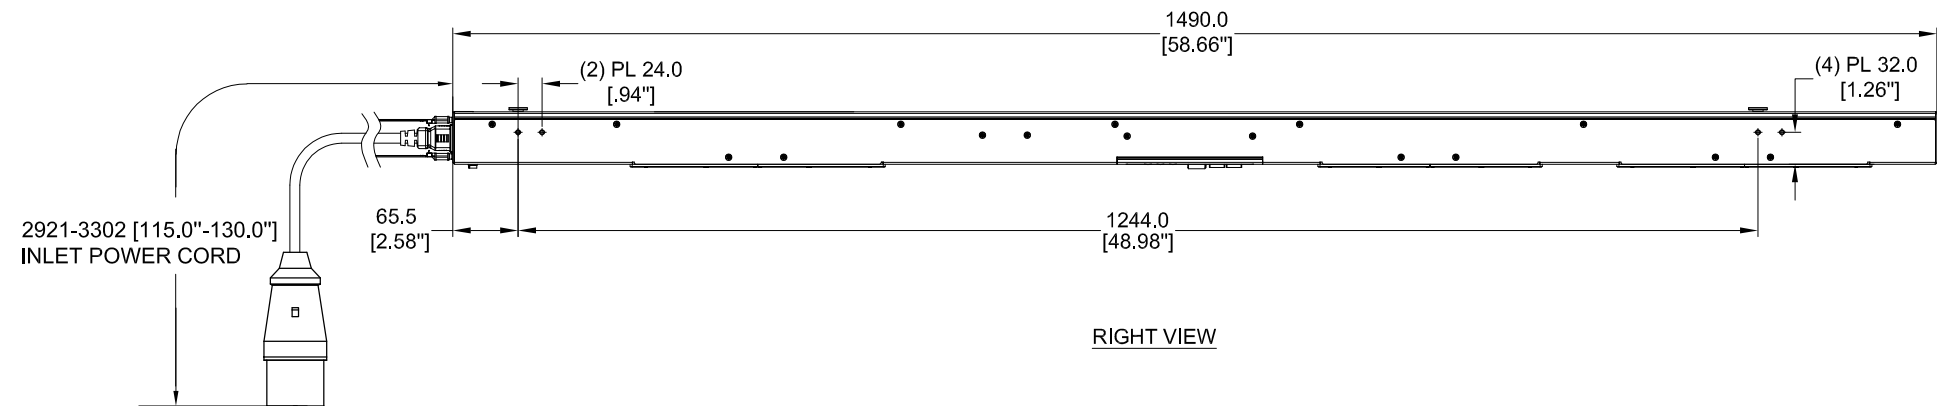
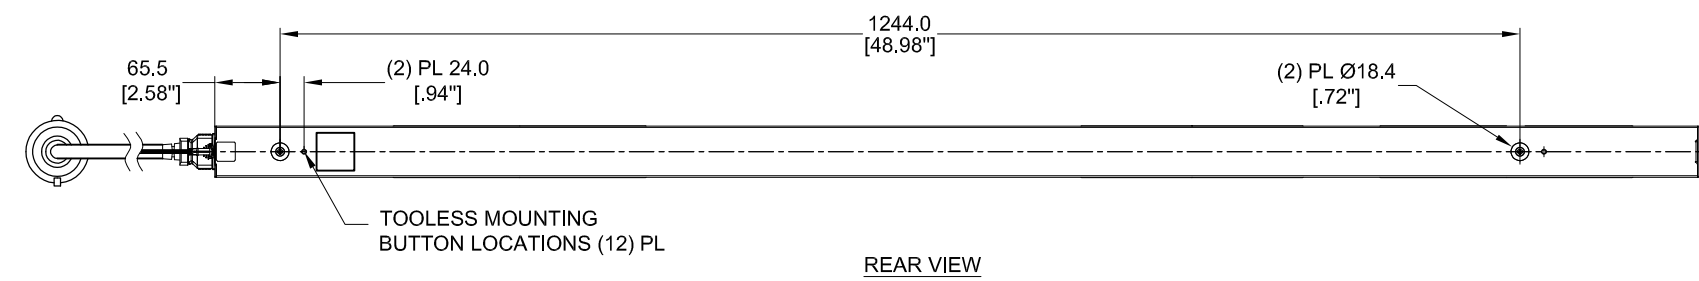


Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-06-19	RELEASE	

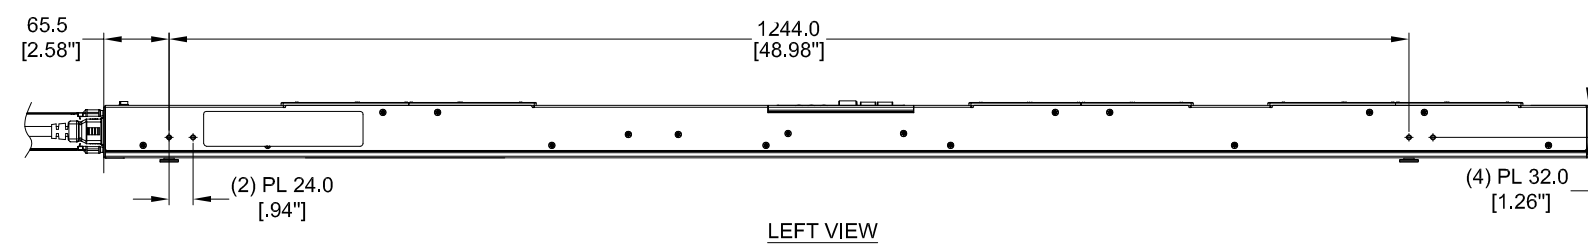

SPECIFICATION:
 1. STANDARD:
 UNIT TYPE: MONITORED SWITCHED
 ORIENTATION: VERTICAL, MID
 OUTLET QTY&TYPE: (20) C13, (4) C19
 INPUT VOLTAGE: 100-240VAC
 INPUT CURRENT: 16A
 BREAKER QTY&TYPE: N/A
 INPUT PHASE: SINGLE-PHASE
 RATED POWER: 3.7kVA
 INPUT PLUG: IEC 60309 2P+E 6H 16A
 INPUT POWER CORD: 3m [10'], TOP FEED
 REGULATORY STANDARD: RoHS COMPLIANT

PLUG/RECEPTACLE BLOCK

PLUG
 IEC 60309, 2P 3W, 6H
 IP44 (SPASHPROOF)
 16A, 250V MAX RATED INPUT

RECEPTACLES
 IEC 60320/C19
 16A, 250V MAX RATED OUTPUT

RECEPTACLES
 IEC 60320/C13
 10A, 250V MAX RATED OUTPUT

Notes:
 This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ±1 XX = ±0.5 XXX = ±0.30 XXXX = ±0.130 ANGULAR X = 1° XX = 0.5° XXX = 0.25°	MATERIAL:	ENCONNEX 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-SV1120040-N
	DESCRIPTION:		DESCRIPTION: 240V/16A, Single Phase, 24 outlets, 20 C13, 4 C19, IEC 60309
UNITS: mm [in]	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX INTERPRET TO ASME Y14.100	DRAWN BY: Leo Liu APPROVED BY: R. FAULKNER	ORG DATE: 2019-06-19 REV DATE:
		SIZE: A2 SCALE: 1:1	SHEET: 1/2 REV: A


Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-06-19	RELEASE	

NOTES:

1. INTERNAL WIRING:



WIRE TYPE:	UL AWM 1015, 12 & 18AWG
LINE 1/R/X COLOR:	BROWN
EARTH GROUND COLOR:	GREEN/YELLOW STRIPE
NEUTRAL WIRE COLOR:	BLUE

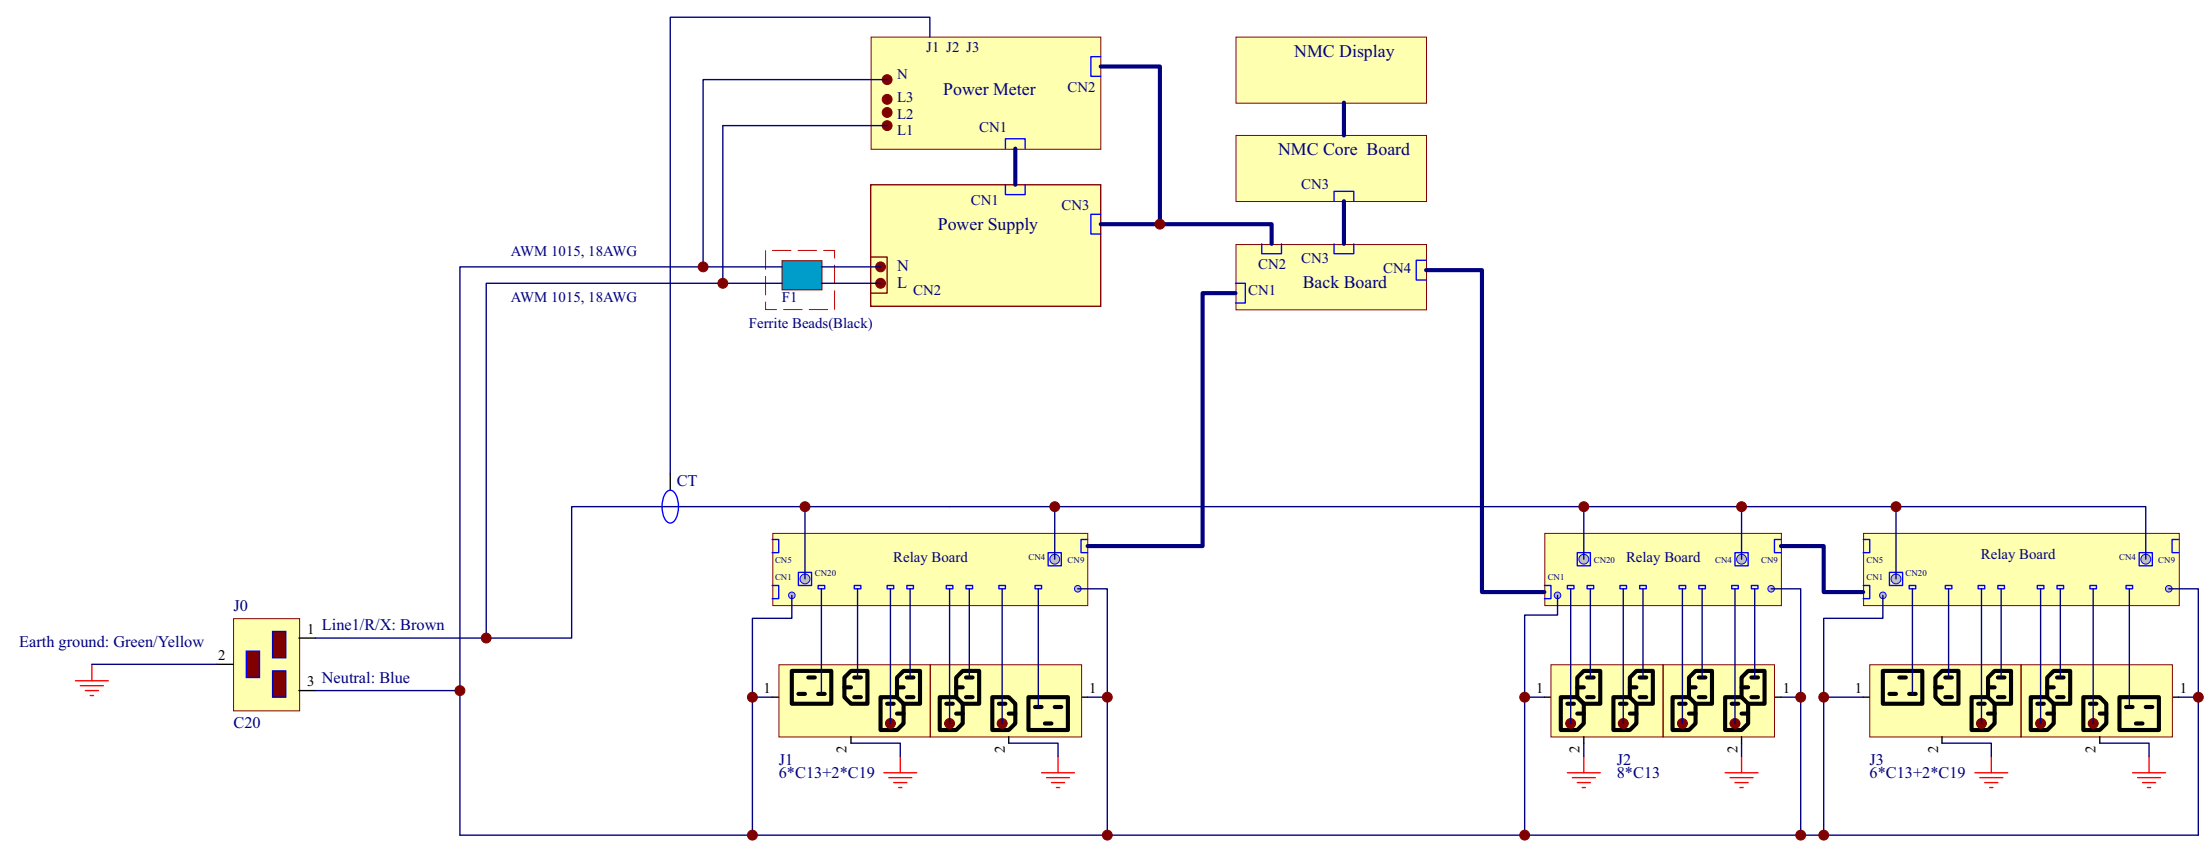

INTERNAL WIRING SCHEMATIC

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-SV1120040-N
	DESCRIPTION:		DESCRIPTION: Wiring Scheme
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: Jing Zhang APPROVED BY: R. FAULKNER	ORG DATE: 2019-06-19	REV DATE:
		UNITS: mm [in] INTERPRET TO ASME Y14.100	SIZE: A4 SCALE: 1 : 1