REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-04-08	RELEASE	CC/RF

Notes/Instructions:

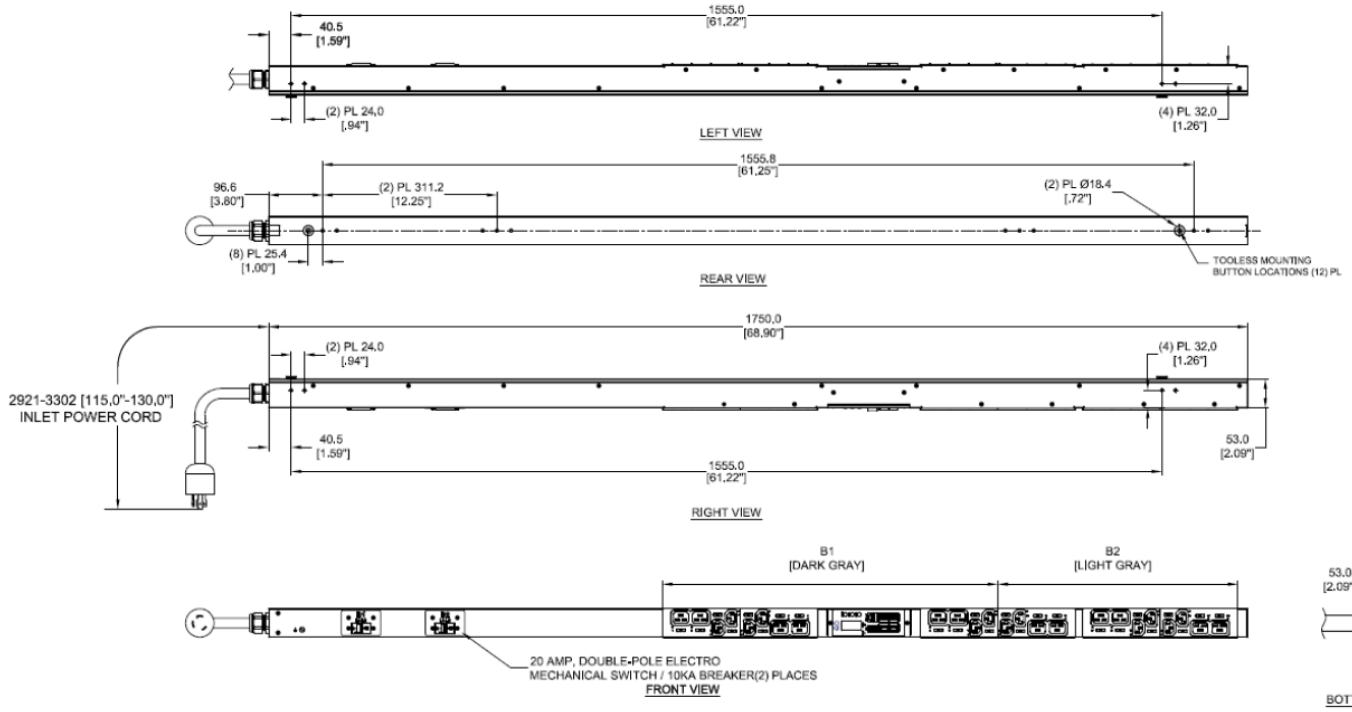

PLUG/RECEPTACLE BLOCK

PLUG
NEMA L6-30P, 2P 3W
30A, 250V MAX RATED INPUT
24A DERATED

RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT

RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

UNIT TYPE:	MONITORED SWITCHED
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(12) C13, (12) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	30A (24A DERATED)
BREAKER QTY&TYPE:	(2) 20AMP, DOUBLE-POLE,10KA
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	5,0kVA
INPUT PLUG:	NEMA L6-30P
INPUT POWER CORD:	3m[10"], TOP FEED
REGULATORY STANDARD:	RoHS COMPLIANT

(NOT TO SCALE)

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL: N/A	ENCONNEX 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-SV1212120-E
	FINISH: N/A		DESCRIPTION: INPUT METERED, OUTLET SWITCHED PDU
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: C.CHAUDHARI	ORG DATE: 2019-04-08
		APPROVED BY: R. FAULKNER	REV DATE: 2019-04-08
UNITS: mm [in]	INTERPRET TO ASME Y14.100	SIZE: A4 SCALE: N/A	SHEET: 13/16 REV: A