


Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-04-08	RELEASE	CC/RF



PLUG/RECEPTACLE BLOCK

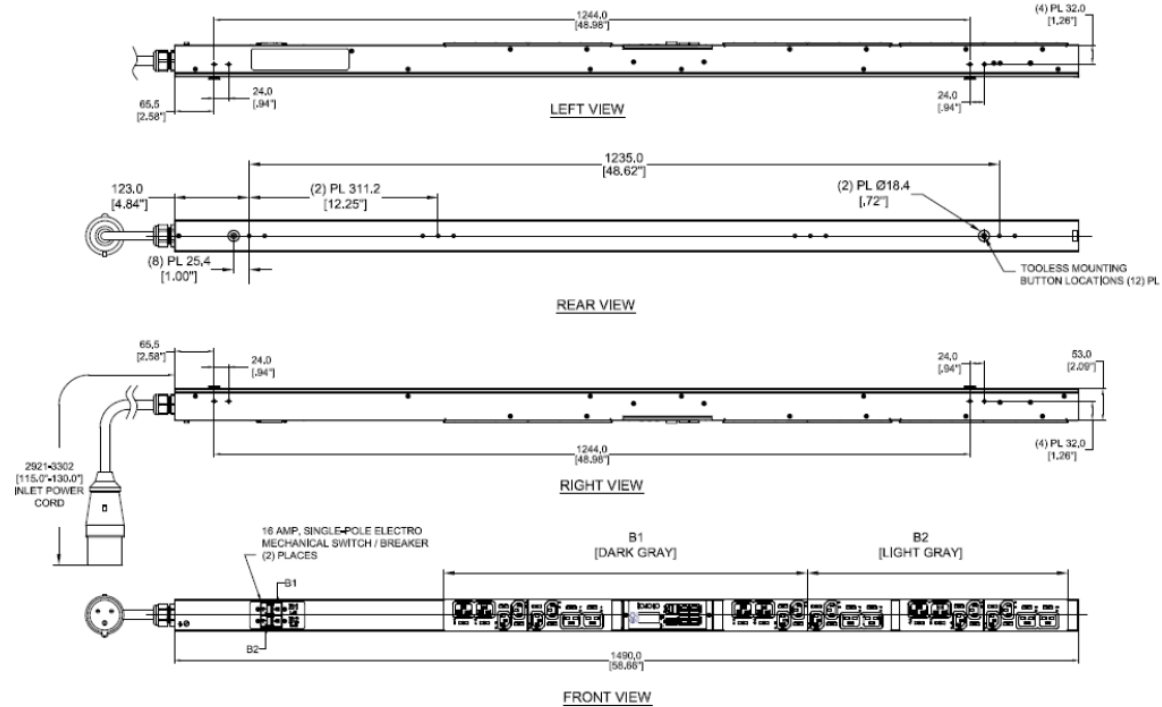

PLUG
IEC 60309, 2P 3W, 6H
IP44 (SPLASHPROOF)
32A, 200-250V MAX RATED INPUT



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT



UNIT TYPE:
ORIENTATION:
OUTLET QTY&TYPE:
INPUT VOLTAGE:
INPUT CURRENT:
BREAKER QTY&TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:

MONITORED SWITCHED
VERTICAL, 0U MID
(12) C13, (12) C19
200-240VAC
32A
(2) 16AMP, SINGLE-POLE, 10KA
SINGLE-PHASE
7.4kVA
IEC 60309 2P+E 6H 32A
3m[10"], TOP FEED
RoHS COMPLIANT

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

(NOT TO SCALE)

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL: N/A	 4670 AIRCENTER CIRCLE, RENO, NV 89502		PART NUMBER: ECX-SV1212121-P
	FINISH: N/A			DESCRIPTION: INPUT METERED, OUTLET SWITCHED PDU
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	UNITS: mm [in] INTERPRET TO ASME Y14.100	DRAWN BY: C.CHAUDHARI		ORG DATE: 2019-04-08
		APPROVED BY: R. FAULKNER		REV DATE: 2019-04-08
SIZE: A4		SCALE: N/A	SHEET: 15/16	
			REV: A	