


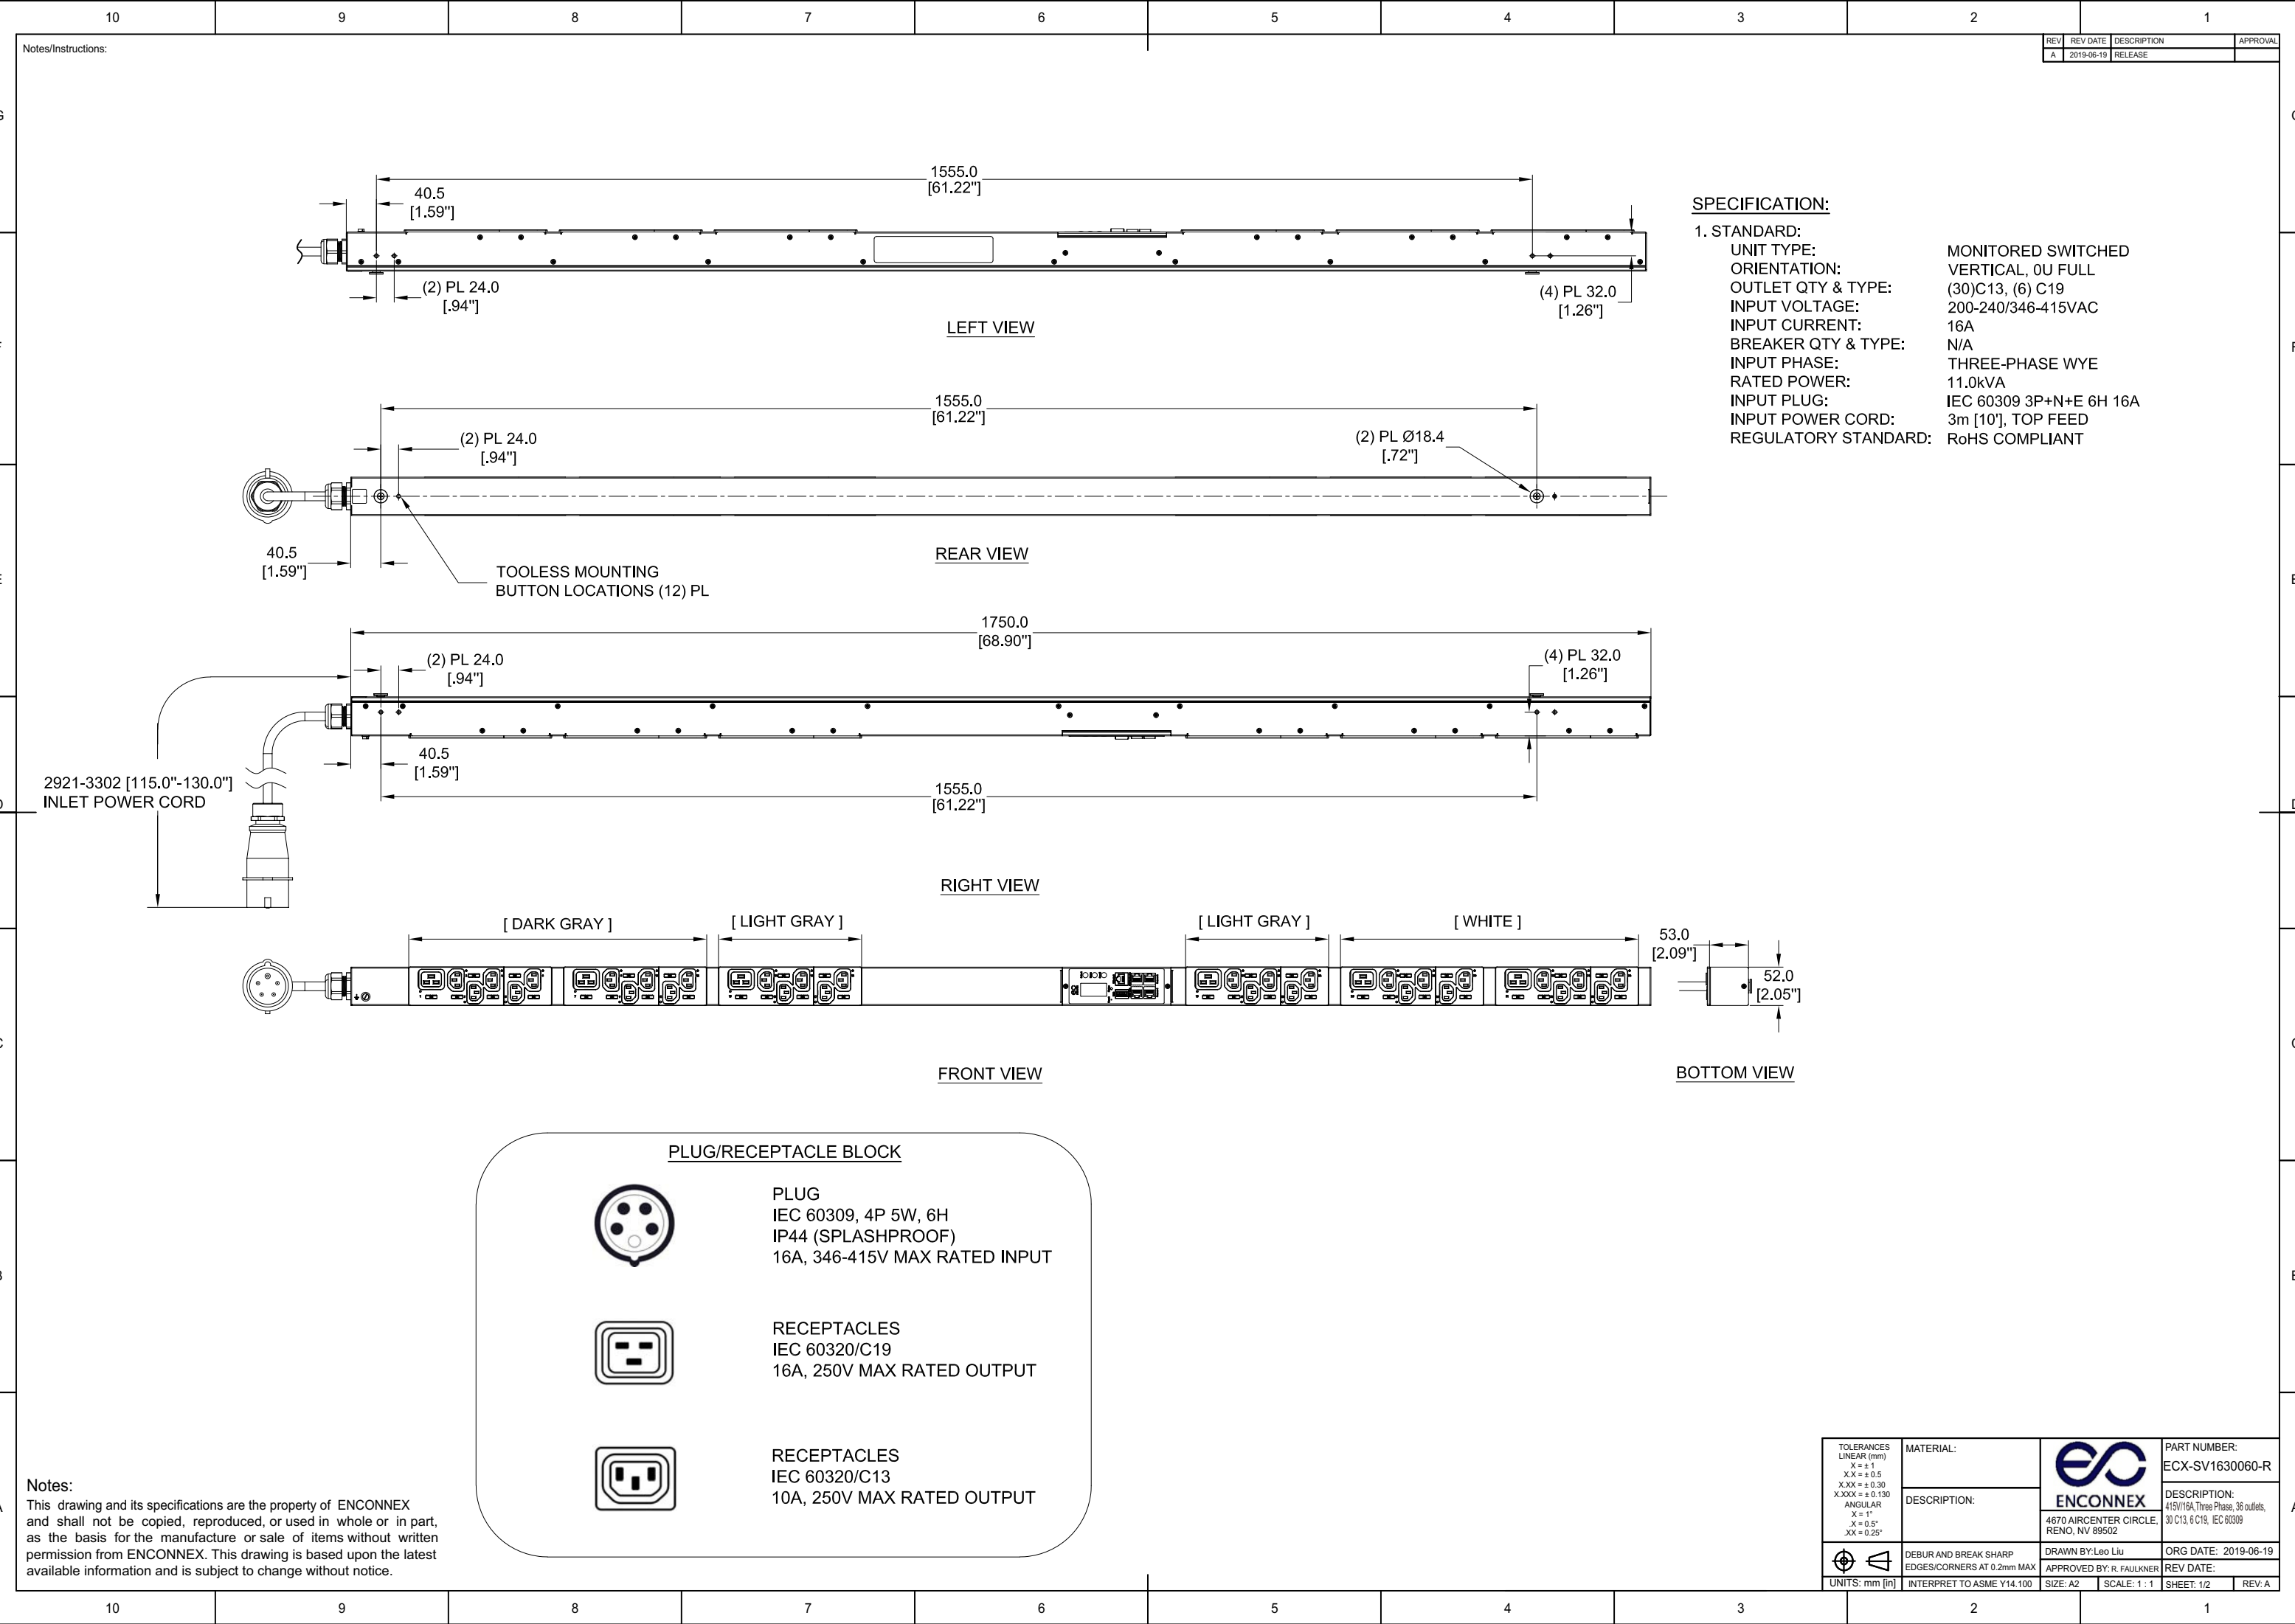

| REV | REV DATE   | DESCRIPTION | APPROVAL |
|-----|------------|-------------|----------|
| A   | 2019-06-19 | RELEASE     |          |

**SPECIFICATION:**

|                      |                         |
|----------------------|-------------------------|
| 1. STANDARD:         |                         |
| UNIT TYPE:           | MONITORED SWITCHED      |
| ORIENTATION:         | VERTICAL, 0U FULL       |
| OUTLET QTY & TYPE:   | (30)C13, (6) C19        |
| INPUT VOLTAGE:       | 200-240/346-415VAC      |
| INPUT CURRENT:       | 16A                     |
| BREAKER QTY & TYPE:  | N/A                     |
| INPUT PHASE:         | THREE-PHASE WYE         |
| RATED POWER:         | 11.0kVA                 |
| INPUT PLUG:          | IEC 60309 3P+N+E 6H 16A |
| INPUT POWER CORD:    | 3m [10'], TOP FEED      |
| REGULATORY STANDARD: | RoHS COMPLIANT          |

**Notes:**  
This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

|                                                                                                                                        |                                                     |                                                                                                                                   |                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| TOLERANCES<br>LINEAR (mm)<br>X = ± 1<br>X.X = ± 0.5<br>X.XX = ± 0.30<br>X.XXX = ± 0.130<br>ANGULAR<br>X = 1°<br>X = 0.5°<br>XX = 0.25° | MATERIAL:                                           | <br>4670 AIRCENTER CIRCLE,<br>RENO, NV 89502 | PART NUMBER:<br>ECX-SV1630060-R                                                |
|                                                                                                                                        | DESCRIPTION:                                        |                                                                                                                                   | DESCRIPTION:<br>415V/16A, Three Phase, 36 outlets,<br>30 C13, 6 C19, IEC 60309 |
|                                                   | DEBUR AND BREAK SHARP<br>EDGES/CORNERS AT 0.2mm MAX | DRAWN BY: Leo Liu                                                                                                                 | ORG DATE: 2019-06-19                                                           |
|                                                                                                                                        | INTERPRET TO ASME Y14.100                           | APPROVED BY: R. FAULKNER                                                                                                          | REV DATE:                                                                      |
| UNITS: mm [in]                                                                                                                         | SIZE: A2                                            | SCALE: 1 : 1                                                                                                                      | SHEET: 1/2 REV: A                                                              |

Notes/Instructions:

| REV | REV DATE   | DESCRIPTION | APPROVAL |
|-----|------------|-------------|----------|
| A   | 2019-06-19 | RELEASE     |          |

- NOTES:
1. INTERNAL WIRING:
- WIRE TYPE:

UL AWM 1015, 10 & 12 & 18AWG
- LINE 1/R/X COLOR:


BROWN
- LINE 2/S/Y COLOR:

BLACK
- LINE 3/T/Z COLOR:

WHITE
- EARTH GROUND COLOR:

GREEN/YELLOW STRIPE
- NEUTRAL WIRE COLOR:


BLUE

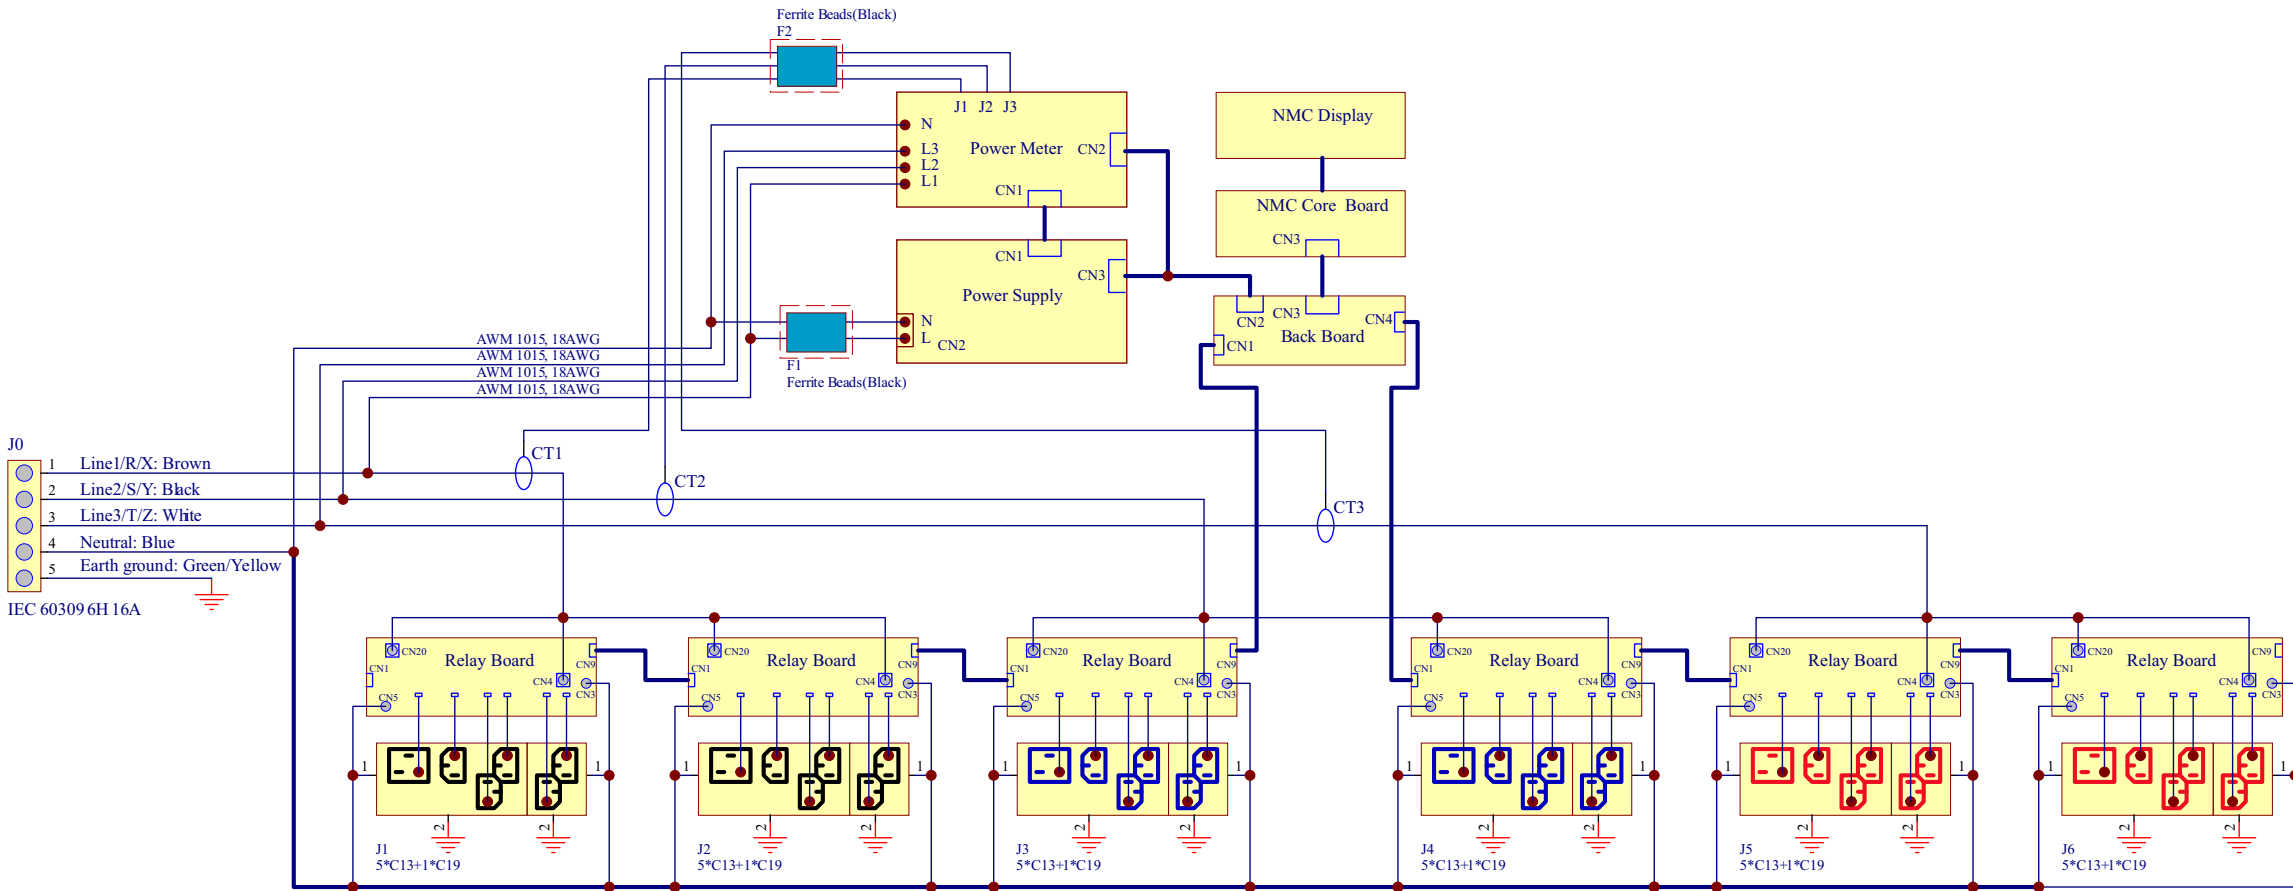

INTERNAL WIRING SCHEMATIC

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

|                                                                                                                                          |                                                     |                                                                                                                                   |                                 |
|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| TOLERANCES<br>LINEAR (mm)<br>X = ± 1<br>X.X = ± 0.5<br>X.XX = ± 0.30<br>X.XXX = ± 0.130<br>ANGULAR<br>X = 1°<br>.X = 0.5°<br>.XX = 0.25° | MATERIAL:                                           | <br>4670 AIRCENTER CIRCLE,<br>RENO, NV 89502 | PART NUMBER:<br>ECX-SV1630060-R |
|                                                                                                                                          | DESCRIPTION:                                        |                                                                                                                                   | DESCRIPTION:<br>Wiring Scheme   |
|                                                     | DEBUR AND BREAK SHARP<br>EDGES/CORNERS AT 0.2mm MAX | DRAWN BY: Jing Zhang                                                                                                              | ORG DATE: 2019-06-19            |
|                                                                                                                                          | INTERPRET TO ASME Y14.100                           | APPROVED BY: R. FAULKNER                                                                                                          | REV DATE:                       |
| UNITS: mm [in]                                                                                                                           |                                                     | SIZE: A4                                                                                                                          | SCALE: 1 : 1                    |
|                                                                                                                                          |                                                     | SHEET: 2/2                                                                                                                        | REV: A                          |