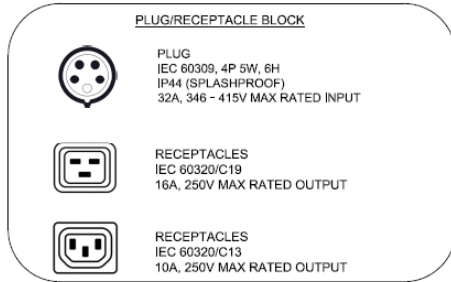
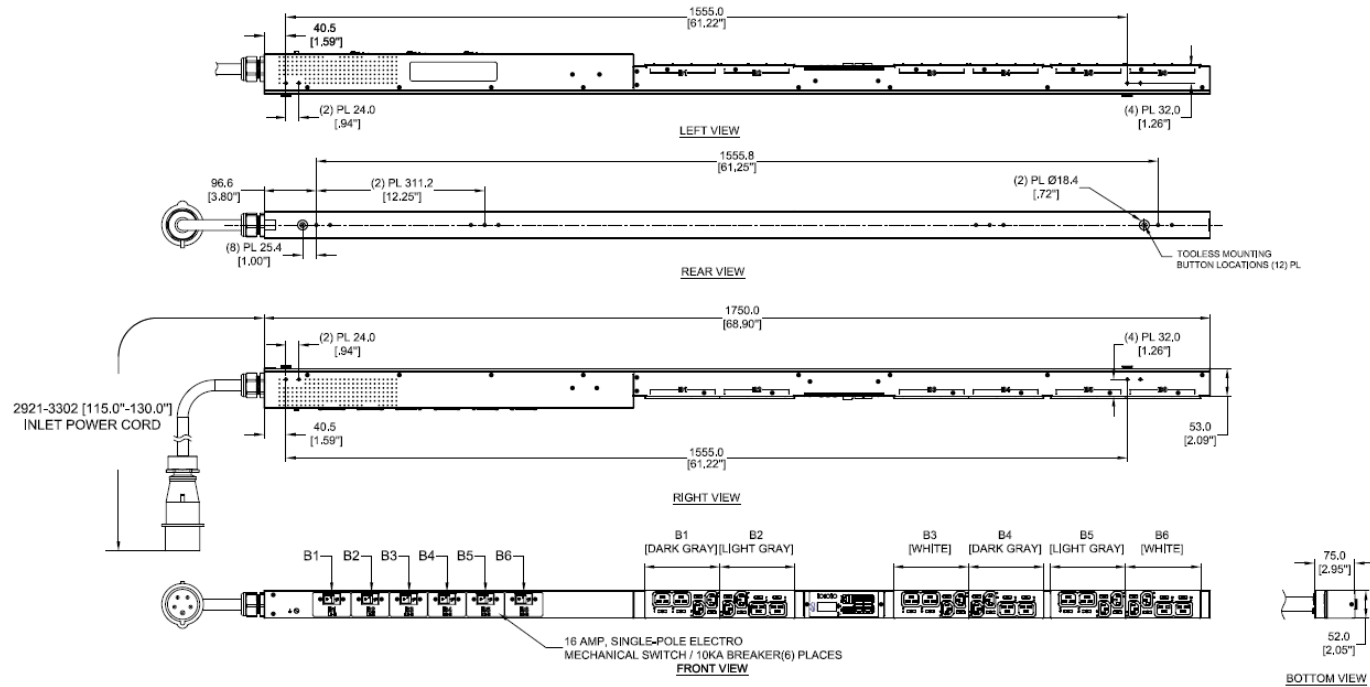


Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-04-08	RELEASE	CC/RF





UNIT TYPE: MONITORED SWITCHED  
 ORIENTATION: VERTICAL, 0U FULL  
 OUTLET QTY&TYPE: (12) C13, (12) C19  
 INPUT VOLTAGE: 200-240/346-415VAC  
 INPUT CURRENT: 32A  
 BREAKER QTY&TYPE: (6) 16AMP, SINGLE-POLE, 10KA  
 INPUT PHASE: THREE-PHASE, WYE  
 RATED POWER: 22,0kVA  
 INPUT PLUG: IEC 60309 3P+N+E 6H 32A  
 INPUT POWER CORD: 3m(10'), TOP FEED  
 REGULATORY STANDARD: RoHS COMPLIANT

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

(NOT TO SCALE)

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL: N/A	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-SV1712120-T
	FINISH: N/A		DESCRIPTION: INPUT METERED, OUTLET SWITCHED PDU
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: C.CHAUDHARI	ORG DATE: 2019-04-08
UNITS: mm [in]	INTERPRET TO ASME Y14.100	APPROVED BY: R. FAULKNER	REV DATE: 2019-04-08
		SIZE: A4	SCALE: N/A
		SHEET: 11/16	REV: A