

5

4

3

2

1

Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-09-12	RELEASE	
B	2020-05-14	OUTLET MODULE CHANGE	
C	2020-07-22	FINISHED GOOD DESCRIPTION UPDATE	

D

C

B

A

FINISHED GOOD NUMBER	FINISHED GOOD DESCRIPTION	COLOR	COLOR LABEL	WEIGHT
ECX-SV1812120-7	VERTICAL,(12)C13, (12)C19, MONITORED SWITCHED, ENCONNEX CONNECTOR, ECX-HDC-730P, 7-PIN,NO POWER CORD,TOP-FRONT FED,BLACK	BLACK(RAL 9005)	N/A	9.2kg
ECX-SV1812120-7RO	VERTICAL,(12)C13, (12)C19, MONITORED SWITCHED, ENCONNEX CONNECTOR, ECX-HDC-730P, 7-PIN,NO POWER CORD,TOP-FRONT FED,RED	RED(RAL 3020)	R E D	9.2kg
ECX-SV1812120-7BO	VERTICAL,(12)C13, (12)C19, MONITORED SWITCHED, ENCONNEX CONNECTOR, ECX-HDC-730P, 7-PIN,NO POWER CORD,TOP-FRONT FED,BLUE	BLUE(RAL 5005)	B L U E	9.2kg

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES  
LINEAR (mm)  
X = ± 1  
X.X = ± 0.5  
X.XX = ± 0.30  
X.XXX = ± 0.130  
ANGULAR  
X = 1°  
.X = 0.5°  
.XX = 0.25°

UNITS: mm [in]

MATERIAL:

DESCRIPTION:

DEBUR AND BREAK SHARP  
EDGES/CORNERS AT 0.2mm MAX

INTERPRET TO ASME Y14.100

ENCONNEX

4670 AIRCENTER CIRCLE,  
RENO, NV 89502

DRAWN BY: H. XU

APPROVED BY: R. FAULKNER

SIZE: A4

SCALE: 1 : 1

SHEET: 2/3

REV: B

PART NUMBER:  
ECX-SV1812120-7


DESCRIPTION:

ORG DATE: 2020-05-14

REV DATE:

Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-09-19	RELEASE	
B	2020-05-14	OUTLET MODULE CHANGE	
C	2020-05-14	FINISHED GOOD DESCRIPTION UPDATE	

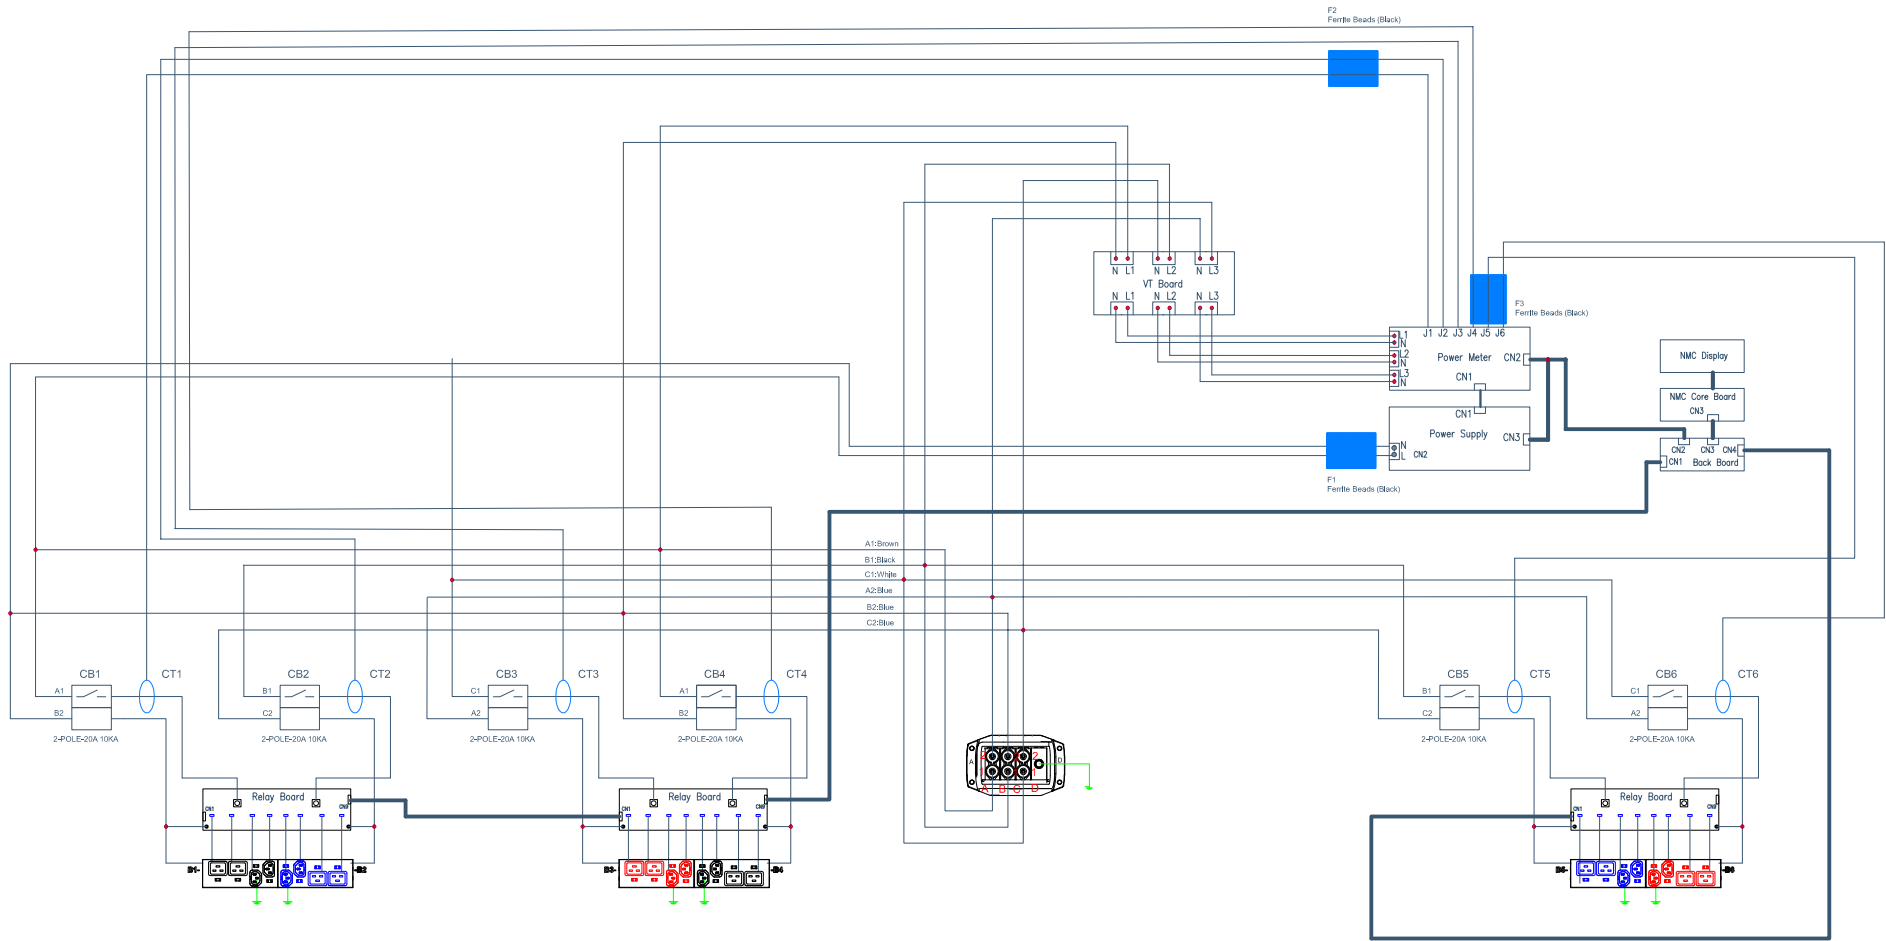

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

<b>TOLERANCES</b> LINEAR (mm) X = ± 0.5 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° X = 0.5° XX = 0.25°	<b>MATERIAL:</b>	 <b>ENCONNEX</b> 4670 AIRCENTER CIRCLE RENO, NV 89502	<b>PART NUMBER:</b> ECX-SV1812120-7
	<b>DESCRIPTION:</b>		<b>DESCRIPTION:</b> Wiring Scheme
	<b>DEBUR AND BREAK SHARP</b> EDGES/CORNERS AT 0.2mm MAX	<b>DRAWN BY:</b> Jing Zhang	<b>ORG DATE:</b> 2020-05-14
<b>UNITS:</b> mm [in]	<b>INTERPRET TO ASME Y14.100</b>	<b>APPROVED BY:</b> J. FALLNER	<b>REV DATE:</b>
		<b>SIZE:</b> A2	<b>SCALE:</b> 1:1
		<b>SHEET:</b> 1/3	<b>REV:</b> B