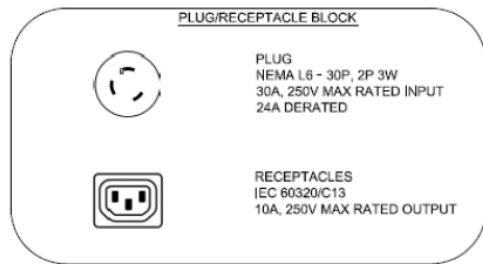
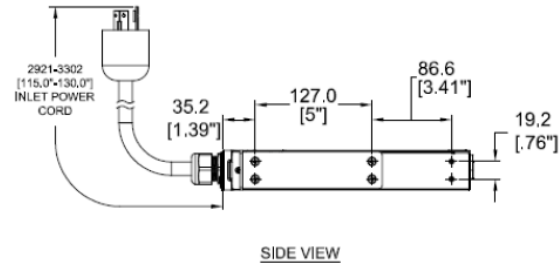
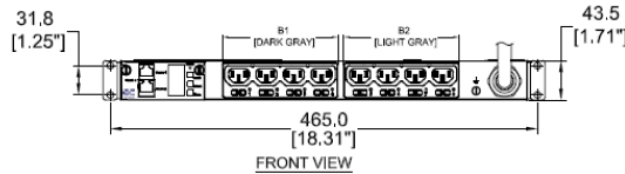
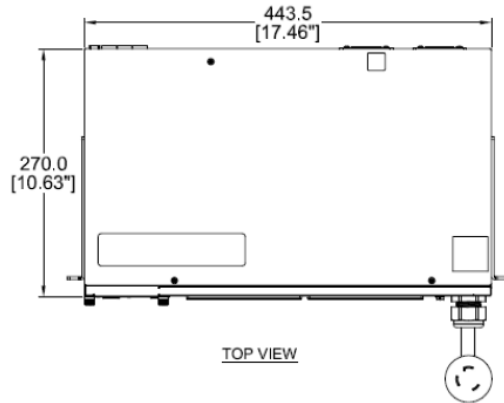
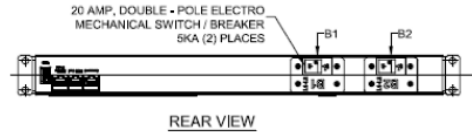


Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-04-08	RELEASE	CC/RF






UNIT TYPE: MONITORED & SWITCHED PER OUTLET
 ORIENTATION: HORIZONTAL, 1U
 OUTLET QTY & TYPE: (8)C13
 INPUT VOLTAGE: 200-240VAC
 INPUT CURRENT: 30A(24A DERATED)
 BREAKER QTY & TYPE: (2) 20AMP, DOUBLE-POLE, 5 KA
 INPUT PHASE: SINGLE-PHASE
 RATED POWER: 5.0KVA
 INPUT PLUG: NEMA L6-30P
 INPUT POWER CORD: 3m [10'], FRONT FEED
 REGULATORY STANDARD: RoHS COMPLIANT

(NOT TO SCALE)

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL: N/A	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-WH1208000-E
	FINISH: N/A		DESCRIPTION: OUTLET METERED, OUTLET SWITCHED PDU
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: C.CHAUDHARI	ORG DATE: 2019-04-08
	INTERPRET TO ASME Y14.100	APPROVED BY: R. FAULKNER	REV DATE: 2019-04-08
UNITS: mm [in]	SIZE: A4	SCALE: N/A	SHEET: 7/16
			REV: A