
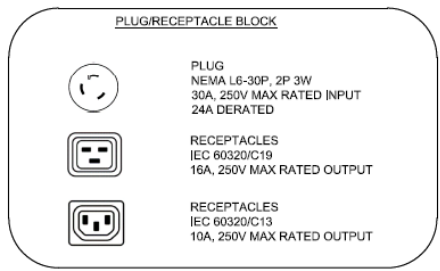


REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-04-08	RELEASE	CC/RF

Notes/Instructions:

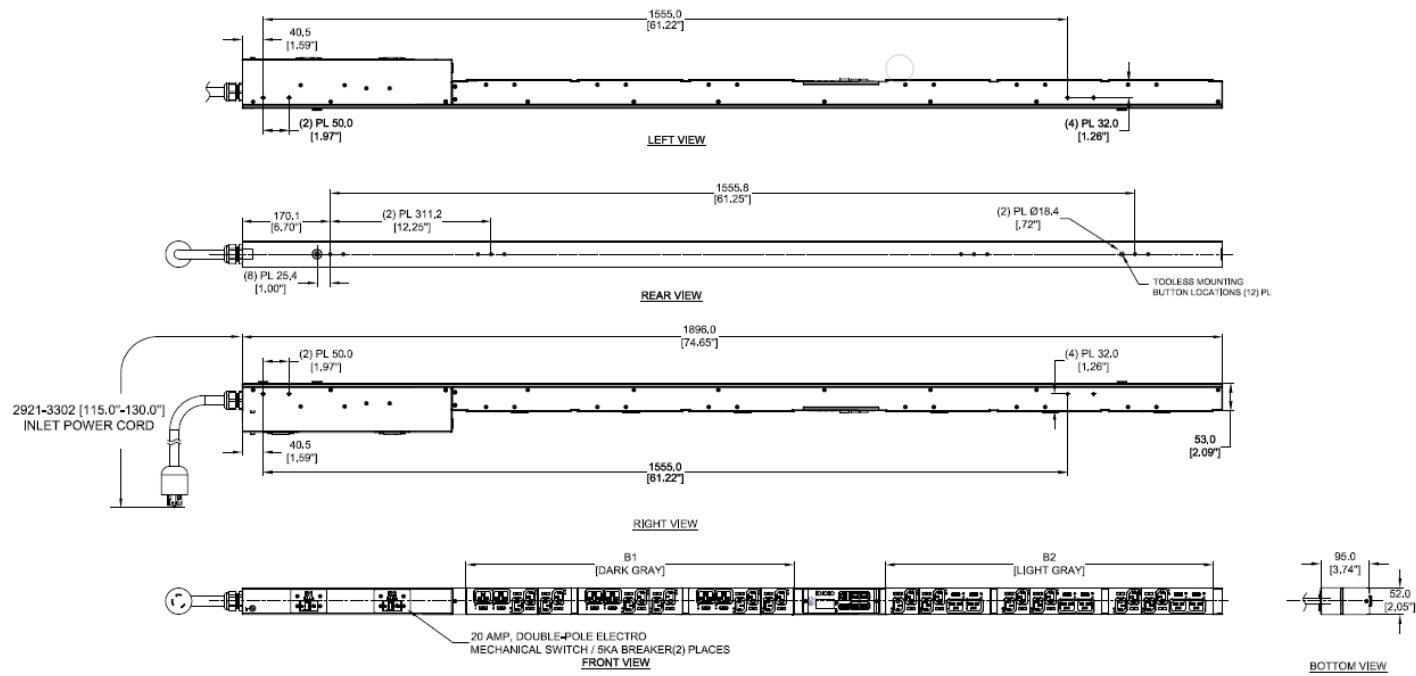

**UNIT TYPE:** MONITORED & SWITCHED PER OUTLET  
**ORIENTATION:** 200-240VAC  
**OUTLET QTY&TYPE:** (24) C13, (12) C19  
**INPUT VOLTAGE:** 100-240VAC  
**INPUT CURRENT:** 30A (24A DERATED)  
**BREAKER QTY&TYPE:** (2)20AMP, DOUBLE POLE,5KA  
**INPUT PHASE:** SINGLE-PHASE  
**RATED POWER:** 5.0kVA  
**INPUT PLUG:** NEMA L6-30P  
**INPUT POWER CORD:** 3m(10)', TOP FEED  
**REGULATORY STANDARD:** RoHS COMPLIANT

**Notes:**  
 This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

(NOT TO SCALE)

<b>TOLERANCES LINEAR (mm)</b> X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 <b>ANGULAR</b> X = 1° .X = 0.5° .XX = 0.25°	<b>MATERIAL:</b> N/A		<b>PART NUMBER:</b> ECX-WV1224120-E
	<b>FINISH:</b> N/A		<b>DESCRIPTION:</b> OUTLET METERED, OUTLET SWITCHED PDU
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	4670 AIRCENTER CIRCLE, RENO, NV 89502	<b>ORG DATE:</b> 2019-04-08
<b>UNITS:</b> mm [in]	INTERPRET TO ASME Y14.100	DRAWN BY: C.CHAUDHARI APPROVED BY: R. FAULKNER	<b>REV DATE:</b> 2019-04-08
	SIZE: A4	SCALE: N/A	SHEET: 1/16
			REV: A