
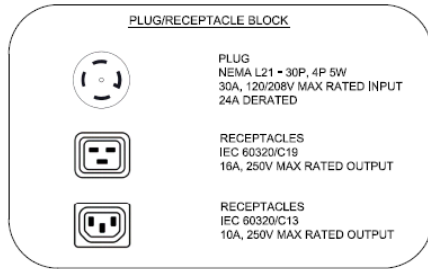


REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-04-08	RELEASE	CC/RF



Notes/Instructions:

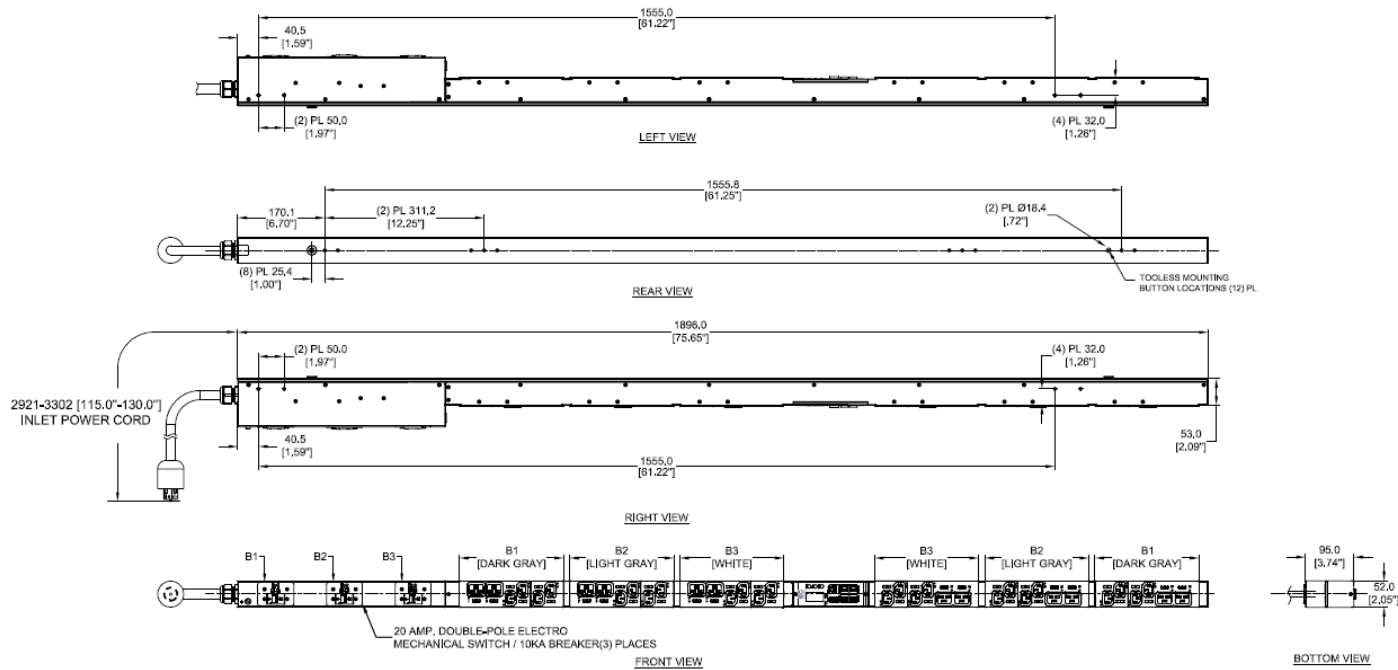

UNIT TYPE: MONITORED & SWITCHED PER OUTLET
 ORIENTATION: VERTICAL, 0U FULL
 OUTLET QTY&TYPE: (24) C13, (12) C19
 INPUT VOLTAGE: 100-120/200-240VAC
 INPUT CURRENT: 30A (24A DERATED)
 BREAKER QTY&TYPE: (3) 20AMP, DOUBLE-POLE, 10KA
 INPUT PHASE: THREE-PHASE, WYE
 RATED POWER: 8.6KVA
 INPUT PLUG: NEMA L21-30P
 INPUT POWER CORD: 3m(10'), TOP FEED
 REGULATORY STANDARD: RoHS COMPLIANT

Notes:
 This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

(NOT TO SCALE)

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL: N/A	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-WV1724120-G
	FINISH: N/A		DESCRIPTION: OUTLET METERED, OUTLET SWITCHED PDU
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: C.CHAUDHARI	ORG DATE: 2019-04-08
UNITS: mm [in]	INTERPRET TO ASME Y14.100	APPROVED BY: R. FAULKNER	REV DATE: 2019-04-08
	SIZE: A4	SCALE: N/A	SHEET: 3/16
			REV: A