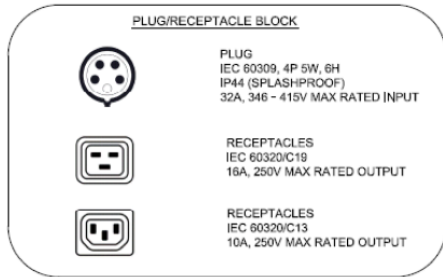
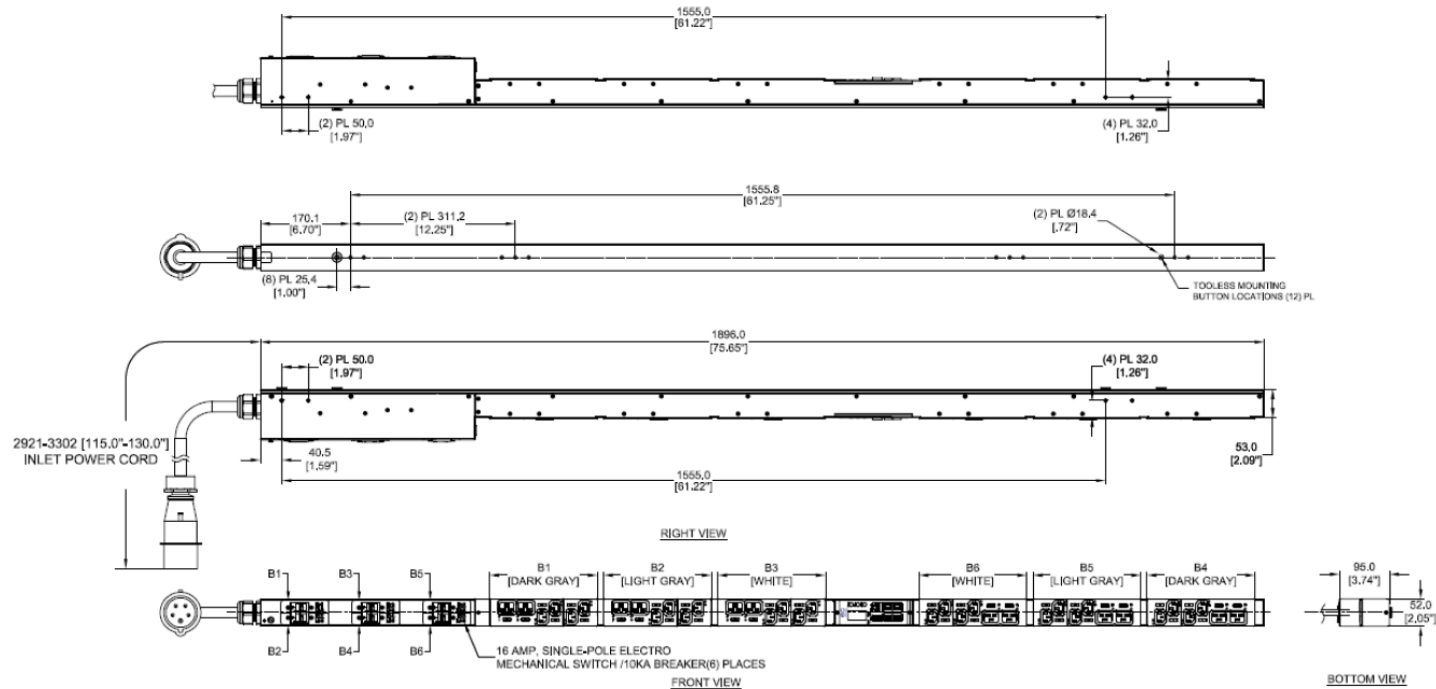


Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-04-08	RELEASE	CC/RF





UNIT TYPE: MONITORED & SWITCHED PER OUTLET
 ORIENTATION: VERTICAL, 0J FULL
 OUTLET QTY&TYPE: (24) C13, (12) C19
 INPUT VOLTAGE: 200-240/346-415VAC
 INPUT CURRENT: 32A
 BREAKER QTY&TYPE: (6) 16AMP, SINGLE-POLE, 10KA
 INPUT PHASE: THREE-PHASE, WYE
 RATED POWER: 22.0kVA
 INPUT PLUG: IEC 60309 3P+N+E 6H 32A
 INPUT POWER CORD: 3m(10'), TOP FEED
 REGULATORY STANDARD: RoHS COMPLIANT

(NOT TO SCALE)

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL: N/A	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-WV1724121-T
	FINISH: N/A		DESCRIPTION: OUTLET METERED, OUTLET SWITCHED PDU
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: C.CHAUDHARI	ORG DATE: 2019-04-08	
UNITS: mm [in]	INTERPRET TO ASME Y14.100	APPROVED BY: R. FAULKNER	REV DATE: 2019-04-08
	SIZE: A4	SCALE: N/A	SHEET: 5/16
			REV: A