

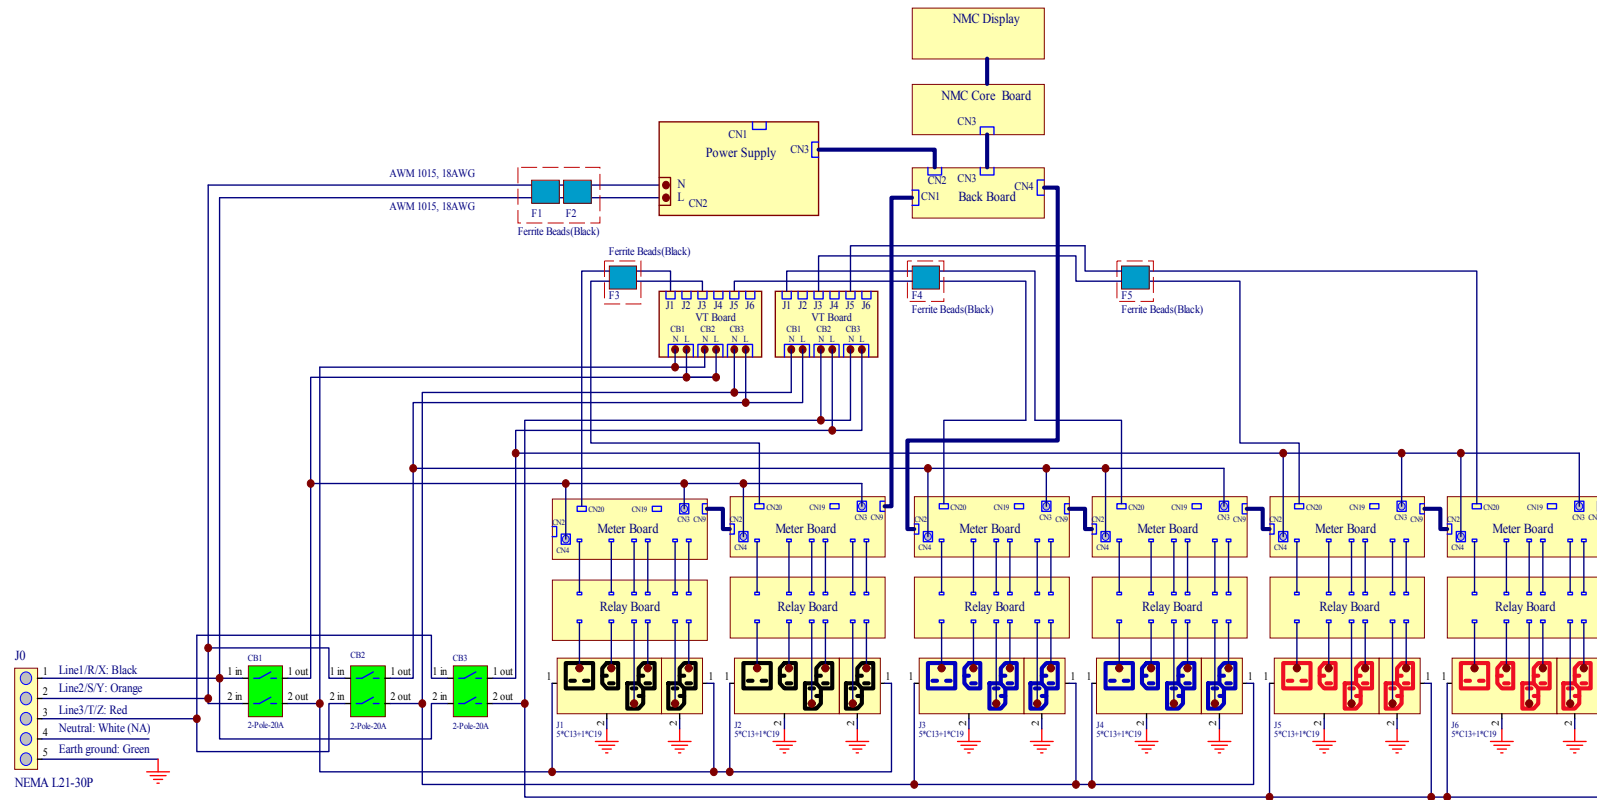


## Notes/Instructions:

ECX-WV1730061-G

Input Cable Type: Type SJT; 90°C; 300V; 10AWG; 5C  
Internal Wire Type: UL AWM 1015, 105°C, 12/18AWG



- 1: Line1/R/X Wire Color = Black
- 2: Line2/S/Y Wire Color = Orange
- 3: Line3/T/Z Wire Color = Red
- 4: Neutral Wire Color = White
- 5: Earth ground Wire Color = Green/Yellow (Stripe)

Input main Ground Terminal: KST, RNBM8-5 or equivalent  
CB Terminal: KST, RNYD5-5  
Outlet Ground Terminal: KST, RNYDL5-4  
Internal Wires (N and G Wire) are soldered to Outlet Terminal

## Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-04-24	RELEASE	

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-WV1730061-G
	DESCRIPTION:		DESCRIPTION: Wiring Scheme
 UNITS: mm [in]	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: SAM DING	ORG DATE: 2019-04-24
	INTERPRET TO ASME Y14.100	APPROVED BY: R. FAULKNER	REV DATE:
SIZE: A4		SCALE: 1 : 1	SHEET: 1/1
			REV: A