
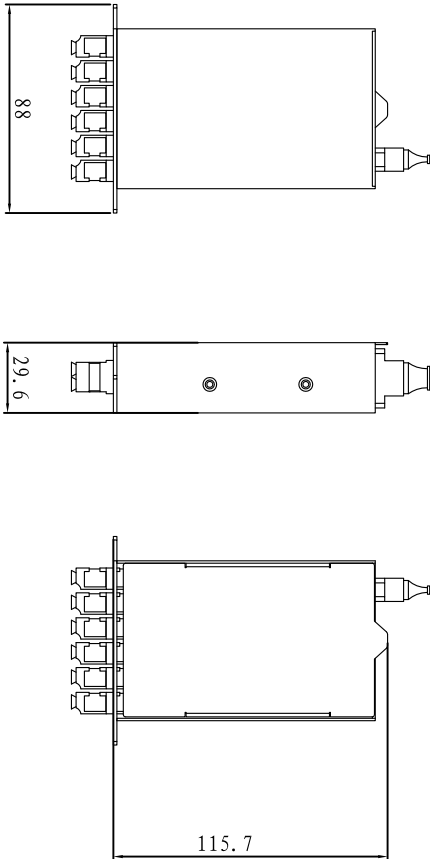



Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-02-19	RELEASE	SD /YZ

F

F



Fiber 1	Blue	Fiber 2	Orange	Fiber 3	Green	Fiber 4	Brown	Fiber 5	Gray	Fiber 6	White
Fiber 12	Aqua	Fiber 11	Pink	Fiber 10	Purple	Fiber 9	Yellow	Fiber 8	Black	Fiber 7	Red


Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES: LINEAR (mm) X => 1 .X => 0.5 .XX => 0.30 ANGULAR X = 1° .X = 0.5° .XX = 0.25°		MATERIAL:	
DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm		DESCRIPTION:	
DRAWN BY: SAM DING		PART NUMBER:	
APPROVED BY: ZHANGREV		ECX-1XMT-12LC	
41424 Christy Street		-SM-HDC	
Fremont, CA 94538		DESCRIPTION:	
ABCD-----		DATE: 2019-02-19	
SIZE: A4		SCALE: 1	
SHEET: 1/1		REV: A	

Notes/Instructions:

REV	DATE	DESCRIPTION	APPROVAL
A	2019-02-19	RELEASE	SD /YZ

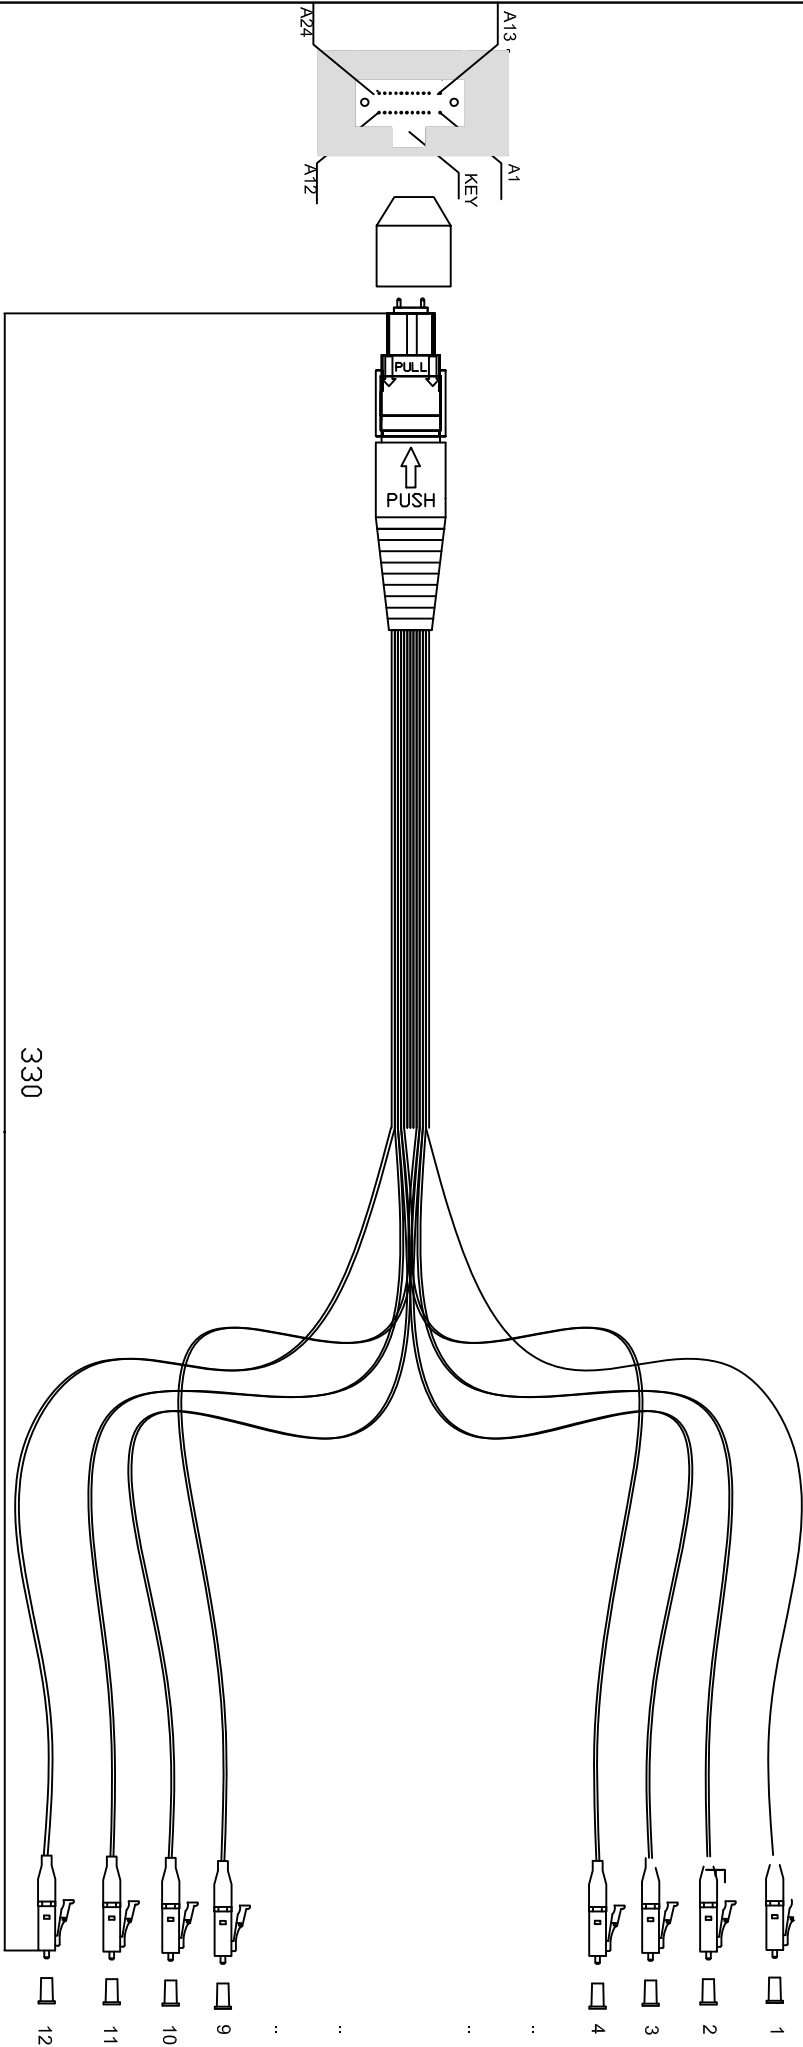

Technical Requirement

Item	Unit	Parameter
Operating Wavelength	nm	1310-1550
Connector Type	-	MTP/APC (Male) LC/PC
Connector Color	-	Green Blue
IL	dB	≤ 0.5 ≤ 0.3
RL	dB	≥ 60 ≥ 50
Fiber Type	-	6652D
Fiber Brand	-	Corning
Cable Diameter	mm	0.6
Cable Color	-	12Color
Flame Class	-	LSZH

Polarity Requirement

A/1 Blue	B/1 Blue
A/2 Orange	B/2 Orange
A/3 Green	B/3 Green
A/4 Brown	B/4 Brown
A/5 Grey	B/5 Grey
A/6 White	B/6 White
A/7 Red	B/7 Red
A/8 Black	B/8 Black
A/9 Yellow	B/9 Yellow
A/10 Purple	B/10 Purple
A/11 Pink	B/11 Pink
A/12 Aqua	B/12 Aqua

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCE MATERIAL: LINEAR (mm) X => 1 X => 0.5 XX => 0.30 XXX => 0.150 ANGULAR X = 1° X = 0.5° XX = 0.25°	DESCRIPTION: 41424 Christy Street Fremont, CA 94538	PART NUMBER: ECX-1XMTP-12LC -SM-HDC
---	---	---



DESCRIPTION:

ABCD-----

DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm	DRAWN BY: SAM DING	ORG DATE2019-02-19
UNITSmm [in]	APPROVED BY: ZHANGREV	DATE2019-02-19
INTERPRET TO ASME Y14.1	SIZE:A4	SCALE: 1
	SHEET: 1/1	REV:A