

8

7

6

5

4

3

2



1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF ENCONNEX LLC. AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION OF ENCONNEX LLC. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.

Assembly Drawing


REVISIONS

REV.	SUFFIX	DESCRIPTION	DATE	APPROVED
A		Full Released	2020-3-10	MIKE
B		Add Label	2022-4-12	MIKE

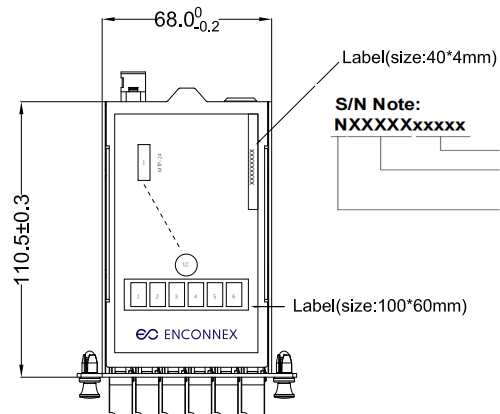



S/N Note:
NXXXXXxxxxx

00001~99999
Enconnex PO NO.
(5 numbers only)
Production address code
(1 for China, 2 for Reno)



Blue 1	Orange 2	Green 3	Brown 4	Grey 5	White 6	Red 7	Black 8	Yellow 9	Purple 10	Pink 11	Aqua 12
Blue 13	Orange 14	Green 15	Brown 16	Grey 17	White 18	Red 19	Black 20	Yellow 21	Purple 22	Pink 23	Aqua 24

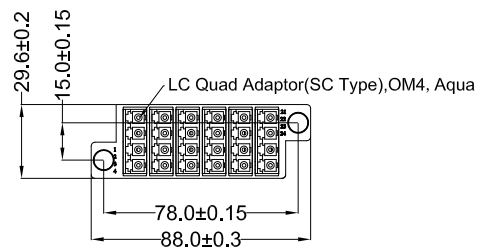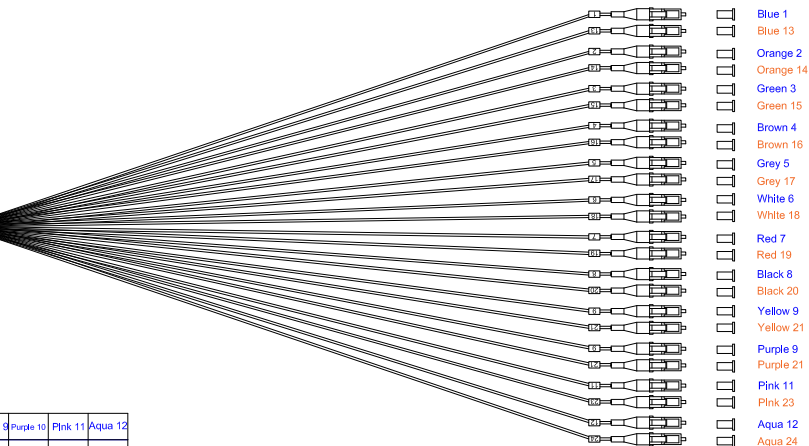

Material:
SPCC with Black color painting

UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: X. ± 1 MM X.X ± 0.5 MM X.XX ± 0.20MM ØX.X ± 0.3 MM ØX.XX ± 0.10MM		 4670 AIRCENTER CIRCLE, RENO, NV89502		PRODUCT LINE: CONNECTIVITY	
DRAWING FILE NAME XXX 3D MODEL FILE NAME XXX 3D MODEL CONFIGURATION Default		ENGINEER: JACK SHI DRAWN: JACK SHI ITEM WEIGHT (REFERENCE ONLY)		PART NUMBER: ECX-1XMTMP-24LC-OM4-HDC	
THIRD ANGLE PROJECTION		DESCRIPTION: 1XMTMP-24LC CASSETTE		ORG DATE: 2020-3-10 REV DATE: 2022-4-12	
UNITS: MM[IN] INTERPRET TO ASME Y14.100		SIZE: B		SCALE: N/A DO NOT SCALE DRAWING	
				REV: B	
				SHEET: 1/2	

8

7

6

5

4

3

2


1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF ENCONNEX LLC. AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION OF ENCONNEX LLC. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.

Cable Drawing

REVISIONS

REV.	SUFFIX	DESCRIPTION	DATE	APPROVED
A		Full Released	2020-3-10	MIKE
B		Add Label	2022-4-12	MIKE

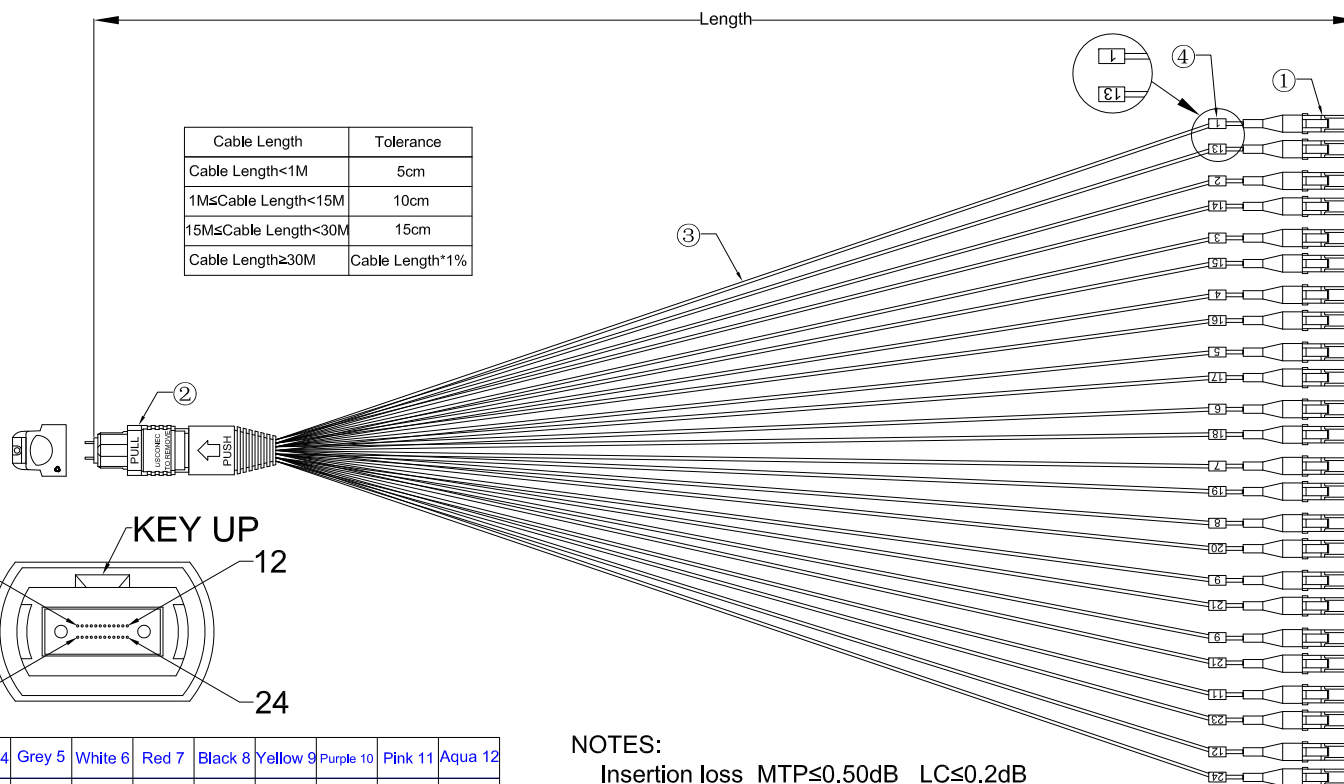

NOTES:

Insertion loss MTP≤0.50dB LC≤0.2dB
Return loss MTP≥30dB LC≥35dB

ITEM	QTY	P/N	SPECIFICATIONS
④	24		Cable Marker
③	A/R		OD:0.6mm, Simplex, Multimode 50/125 OM4, Corning, 12Colours, Hytrel
②	1		MTP/UPC Male MM 24 Fibers Connector (Aqua Housing, Black Boot)
①	24		LC/UPC SX Multimode 0.9mm Connector (Beige Housing, White Boot)

UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: X. ± 1 MM X° ± 1° X.X ± 0.5 MM X.X° ± 0.5° X.XX ± 0.2MM ØX.X ± 0.3 MM ØX.XX ± 0.10MM		 4670 AIRCENTER CIRCLE, RENO, NV89502		PRODUCT LINE: CONNECTIVITY	
DRAWING FILE NAME XXX		ENGINEER: JACK SHI		ORG DATE: 2020-3-10	
3D MODEL FILE NAME XXX		DRAWN: JACK SHI		REV DATE: 2022-4-12	
3D MODEL CONFIGURATION Default		ITEM WEIGHT (REFERENCE ONLY)		REV: B	
UNITS: MM[IN] INTERPRET TO ASME Y14.100		SIZE: B		SCALE: N/ADO NOT SCALE DRAWING	
				SHEET: 2/2	