

8

7

6

5

4

3

2

1



THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF ENCONNEX LLC. AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION OF ENCONNEX LLC. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.

Assembly Drawing

REVISIONS

REV.	SUFFIX	DESCRIPTION	DATE	APPROVED
A		Full Released	2022-9-28	MIKE

MPO/MTP Adaptor(Standard),Black,Key up to Key down

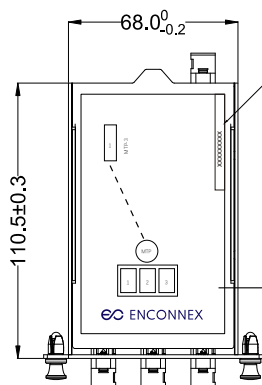

Label(size:40*4mm)



S/N Note:
NXXXXXxxxxxx

00001~99999
Enconnex PO NO.
(5 numbers only)
Production address code
(1 for China, 2 for Reno)

Label(size:100*60mm)




29.6±0.2
15.0±0.15

MPO/MTP Adaptor(Standard),Black,Key up to Key down



Corresponding to hole
1 in the back

Material:
SPCC with Black color painting

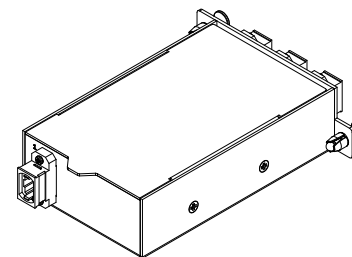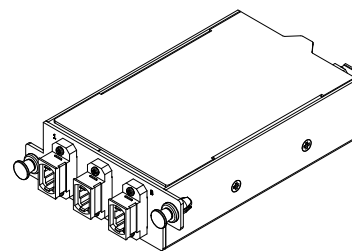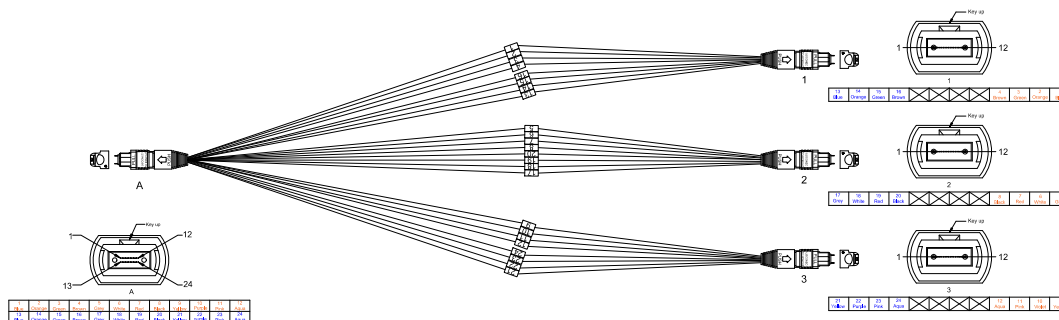

UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: X. ±1 MM X.X ±0.5 MM X.XX ±0.20MM ØX.X ±0.3 MM ØX.XX ±0.10MM		 4670 AIRCENTER CIRCLE, RENO, NV89502	PRODUCT LINE: CONNECTIVITY	
			PART NUMBER: ECX-1XMTP-3MTP-OM3-HDC	
 THIRD ANGLE PROJECTION		DRAWING FILE NAME XXX 3D MODEL FILE NAME XXX 3D MODEL CONFIGURATION Default	DESCRIPTION: 1XMTP-3MTP CASSETTE	
			ENGINEER: JACK SHI DRAWN: JACK SHI ITEM WEIGHT (REFERENCE ONLY)	
UNITS:MM [IN]		INTERPRET TO ASME Y14.100	SIZE:B	SCALE:N/A
			DO NOT SCALE DRAWING	SHEET:1/2

8

7

6

5

4

3

2

1

8

7

6

5

4

3

2


1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF ENCONNEX LLC. AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION OF ENCONNEX LLC. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.

Cable Drawing

REVISIONS

REV.	SUFFIX	DESCRIPTION	DATE	APPROVED
A		Full Released	2022-9-28	MIKE

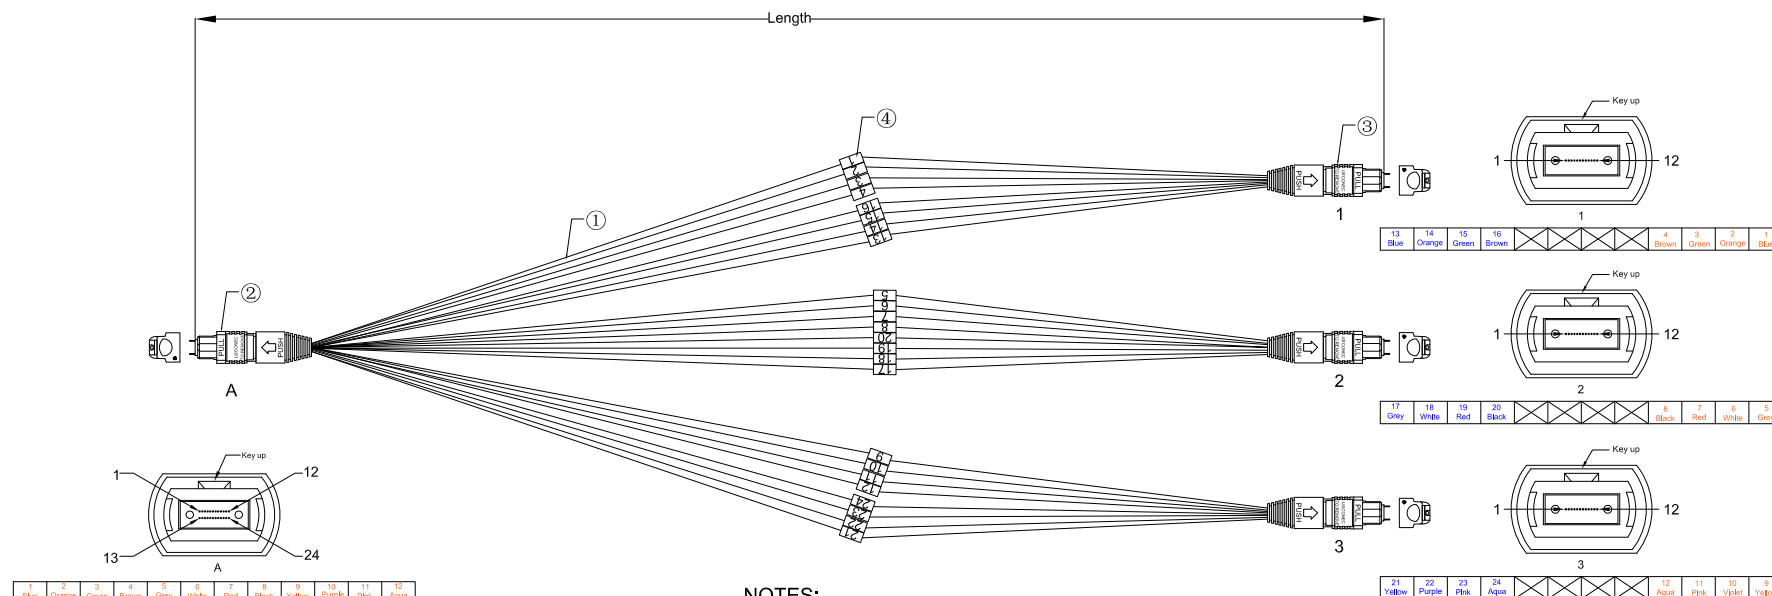

NOTES:

- 1.Insertion loss $\leq 0.5\text{dB}$
- 2.Return loss $\geq 30\text{dB}$

Cable Length	Tolerance
Cable Length<1M	5cm
1Ms<Cable Length<15M	10cm
15Ms<Cable Length<30M	15cm
Cable Length $\geq 30\text{M}$	Cable Length*1%

ITEM	QTY	P/N	SPECIFICATIONS
④	24		Cable Marker
③	3		MTP/UPC Male MM 12 Fibers Connector (Aqua Housing Black Boot)
②	1		MTP/UPC Male MM 24 Fibers Connector (Aqua Housing Black Boot)
①	A/R		OD:0.6mm, Multimode 50/125 OM3 Corning,12 Colors,Hytrel

UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: X. ± 1 MM X.X ± 0.5 MM X.XX $\pm 0.20\text{MM}$ ØX.X ± 0.3 MM ØX.XX $\pm 0.10\text{MM}$		 4670 AIRCENTER CIRCLE, RENO, NV89502		PRODUCT LINE: CONNECTIVITY	
DRAWING FILE NAME XXX		ENGINEER: JACK SHI		ORG DATE: 2022-9-28	
3D MODEL FILE NAME XXX		DRAWN: JACK SHI		REV DATE: 2022-9-28	
3D MODEL CONFIGURATION Default		ITEM WEIGHT (REFERENCE ONLY)		REV: B	
UNITS: MM[IN]		INTERPRET TO ASME Y14.100		SCALE: N/A DO NOT SCALE DRAWING	
SIZE: B		SHEET: 2/2			