

8

7

6

5

4

3

2

1


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF ENCONNEX LLC. AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION OF ENCONNEX LLC. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.

Assembly Drawing


REVISIONS

REV.	SUFFIX	DESCRIPTION	DATE	APPROVED
A		Full Released	2020-3-18	MIKE
B		Add Label	2022-4-12	MIKE

MPO/MTP Adaptor(Standard),Black,Key up to Key down



Plug

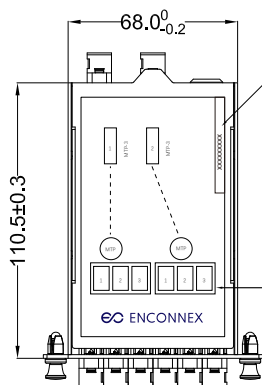

Label(size:40*4mm)

S/N Note:
NXXXXXxxxxxx

00001-99999



Enconnex PO NO.
(5 numbers only)

Production address code
(1 for China, 2 for Reno)

Label(size:100*60mm)





29.6±0.2
15.0±0.15

MPO/MTP Adaptor(Standard),Black,Key up to Key down



Corresponding to hole 1 in the back
Corresponding to hole 2 in the back

Material:
SPCC with Black color painting

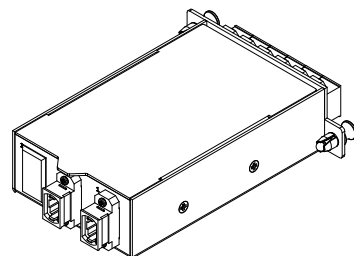

UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE:

X.	± 1	MM	X°	± 1°
X.X	± 0.5	MM	X.X°	± 0.5°
X.XX	± 0.2	MM		
ØX.X	± 0.3	MM		
ØX.XX	± 0.10	MM		




PRODUCT LINE:
CONNECTIVITY

PART NUMBER:
ECX-2XMTP-6MTP-OM4-HDC

DESCRIPTION:
2XMTP-6MTP CASSETTE

4670 AIRCENTER
CIRCLE, RENO,
NV89502



THIRD ANGLE
PROJECTION

DRAWING FILE NAME

XXX

3D MODEL FILE NAME

XXX

3D MODEL CONFIGURATION

Default

ENGINEER: JACK SHI

DRAWN: JACK SHI

ITEM WEIGHT (REFERENCE ONLY)

REV: B

ORG DATE:

2020-3-18

REV DATE:

2022-4-12

UNITS: MM[IN] INTERPRET TO ASME Y14.100 SIZE: B SCALE: N/ADO NOT SCALE DRAWING SHEET: 1/2

8

7

6

5

4

3

2


1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF ENCONNEX LLC. AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT THE WRITTEN PERMISSION OF ENCONNEX LLC. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.

Cable Drawing

REVISIONS

REV.	SUFFIX	DESCRIPTION	DATE	APPROVED
A		Full Released	2022-3-18	MIKE
B		Add Label	2022-4-12	MIKE

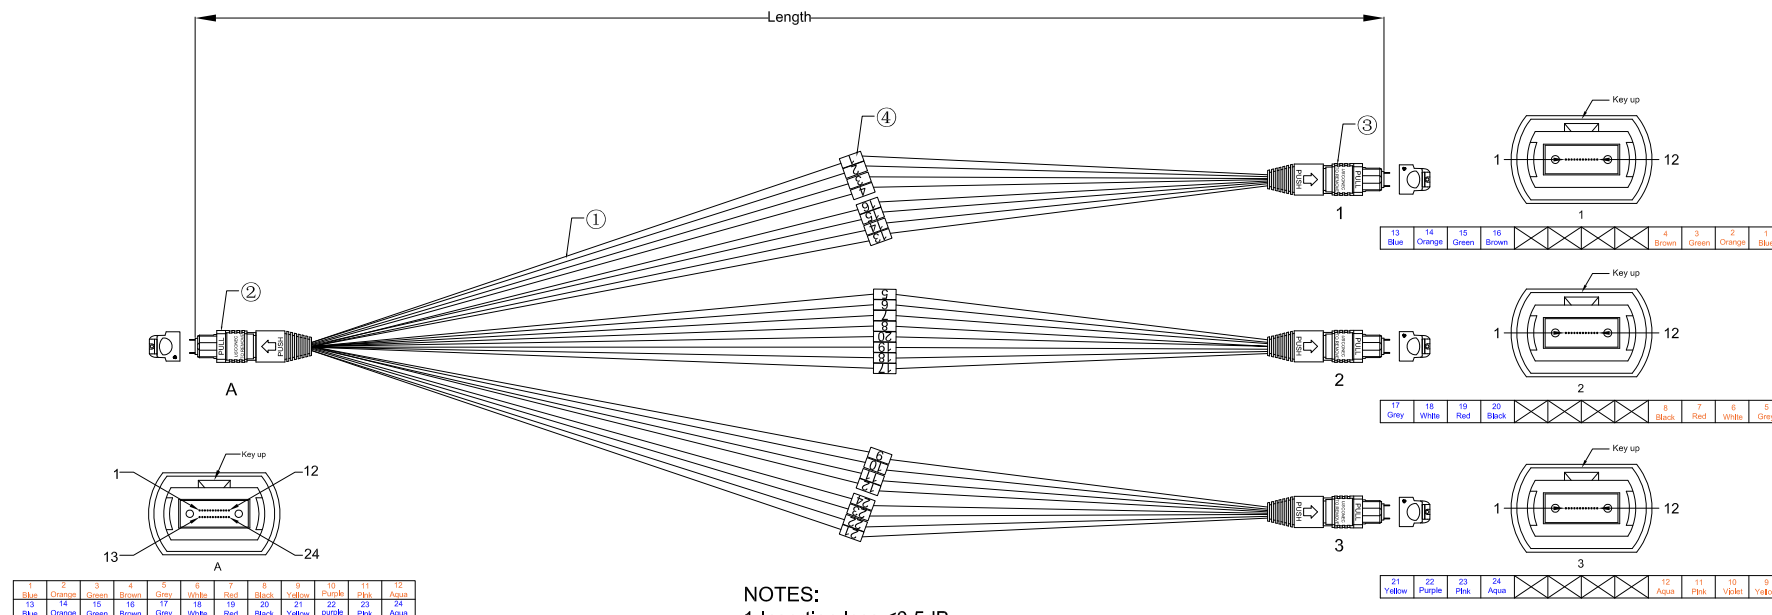

NOTES:

- 1.Insertion loss $\leq 0.5\text{dB}$
- 2.Return loss $\geq 30\text{dB}$

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

ITEM	QTY	P/N	SPECIFICATIONS
④	24		Cable Marker
③	3		MTP/UPC Male MM 12 Fibers Connector (Aqua Housing Black Boot)
②	1		MTP/UPC Male MM 24 Fibers Connector (Aqua Housing Black Boot)
①	A/R		OD:0.6mm, Multimode 50/125 OM4, Corning, 12 Colors, Hytel

UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: X. ± 1 MM X.X ± 0.5 MM X.XX ± 0.20MM ØX.X ± 0.3 MM ØX.XX ± 0.10MM		 4670 AIRCENTER CIRCLE, RENO, NV89502		PRODUCT LINE: CONNECTIVITY	
DRAWING FILE NAME XXX		ENGINEER: JACK SHI		ORG DATE: 2020-3-18	
3D MODEL FILE NAME XXX		DRAWN: JACK SHI		REV DATE: 2022-4-12	
3D MODEL CONFIGURATION Default		ITEM WEIGHT (REFERENCE ONLY)		REV: B	
UNITS: MM[IN] INTERPRET TO ASME Y14.100		SIZE: B		SCALE: N/A DO NOT SCALE DRAWING	
				SHEET: 2/2	