
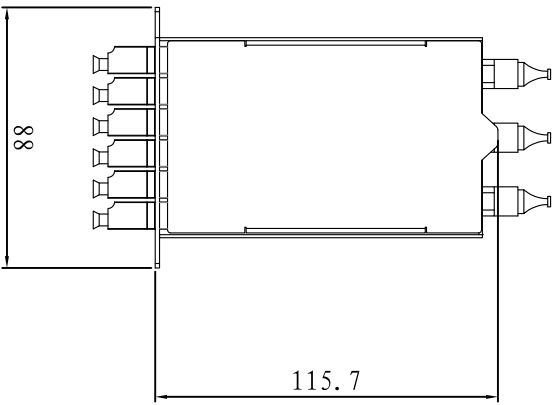





REV	DATE	DESCRIPTION	APPROVAL
A	2019-02-19	RELEASE	SD/YZ

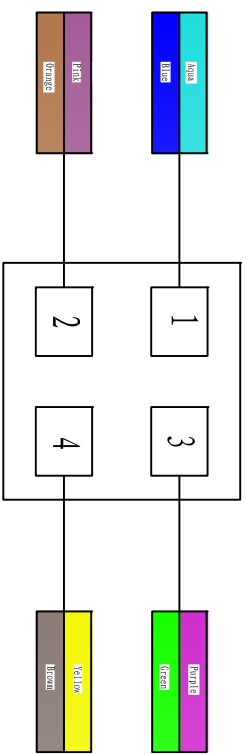


Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

<p>TOLERANCES/ MATERIAL:</p> <p>LINEAR (mm)</p> <p>X => 1</p> <p>.X => 0.5</p> <p>.XX => 0.50</p> <p>.XXX => 0.150</p> <p>ANGULAR</p> <p>X = 1°</p> <p>.X = 0.5°</p> <p>.XX = 0.25°</p>		<p>DESCRIPTION:</p> <p>41424 Christy Street Fremont, CA 94538</p>		<p>PART NUMBER:</p> <p>ECX-3XMTF-24LC -OM3-HDC</p>	
<p>DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm</p>		<p>DRAWN BY: SAM DING</p>		<p>DESCRIPTION:</p> <p>ABCD-----</p>	
<p>UNITS:mm [in]</p>		<p>INTERPRET TO ASME Y14.1</p>		<p>DATE:2019-02-19</p>	
<p>SCALE: A4</p>		<p>SCALE: 1</p>		<p>SHEET: 1/1</p>	
<p>REV: A</p>		<p>REV: A</p>		<p>REV: A</p>	

Notes/Instructions:

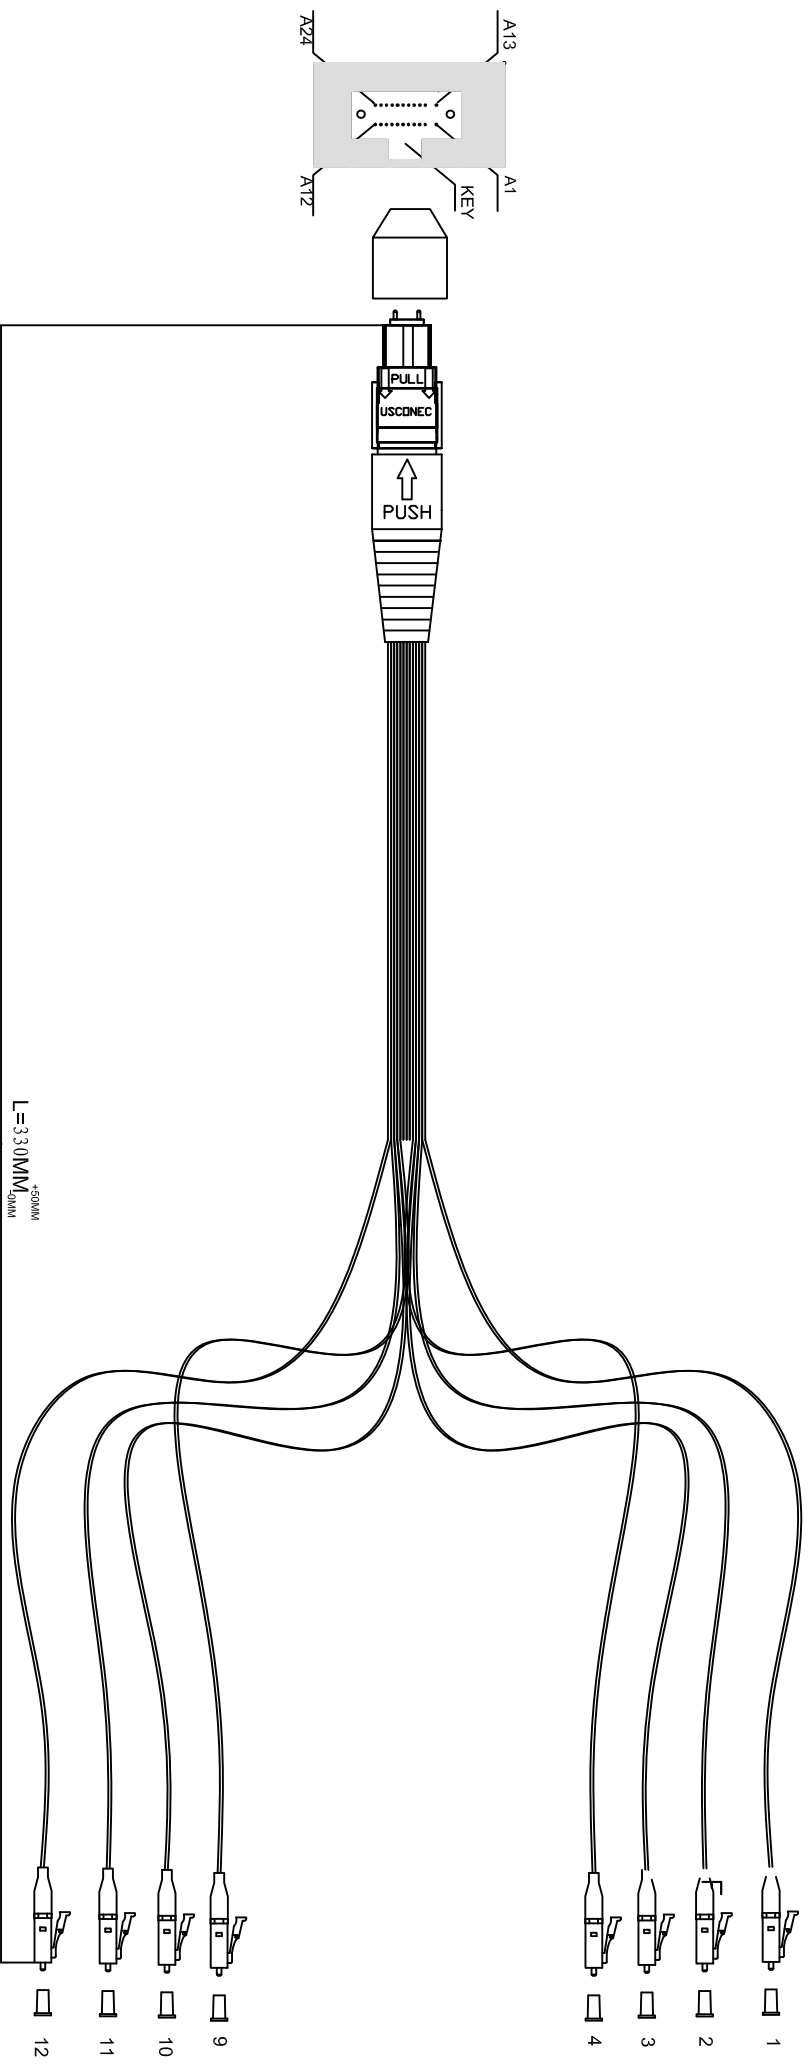

Technical Requirement

Item	Unit	Parameter	Polarity Requirement
Operating Wavelength	nm	850-1300	A/1 Blue B/1 Blue
Connector Type		MTP/PC (Male) LC/PC	A/2 Orange B/2 Orange
Connector Color		Aqua Grey	A/3 Green B/3 Green
IL	dB	≤ 0.5	A/4 Brown B/4 Brown
RL	dB	≤ 0.3	A/5 - B/5 -
Return Loss	dB	≥ 20	A/6 - B/6 -
Fiber Type		OM3-2	A/7 - B/7 -
Fiber Brand		Corning	A/8 - B/8 -
Cable Diameter	mm	0.6	A/9 Grey B/9 Grey
Cable Color		12Color	A/10 White B/10 White
Fiber Class		LSZH	A/11 Red B/11 Red
			A/12 Black B/12 Black

Notes:
This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

<p>TOLERANCES: LINEAR (mm) X => 1 .X => 0.5 .XX => 0.25 .XXX => 0.150 ANGLE X = 1° .X = 0.5° .XX = 0.25°</p>		<p>DESCRIPTION: DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm</p>	
<p>UNIT: mm</p>		<p>INTERPRET TO ASME Y14.4:</p>	
<p>MATERIAL:</p>		<p>DRAWN BY: SAM DING APPROVED BY: ZHANG 41424 Christy Street Fremont, CA 94538</p>	
<p>PART NUMBER: ECX-3XMT-24LC-OM3-HDC</p>		<p>DESCRIPTION: ABCD-----</p>	
<p>SCALE: 1:1</p>		<p>SHEET: 1/1</p>	
<p>DATE: 2019-02-19</p>		<p>REV: A</p>	