REV	REV DATE	DESCRIPTION	APPROVAL
A	2020-10-22	RELEASE	Mike

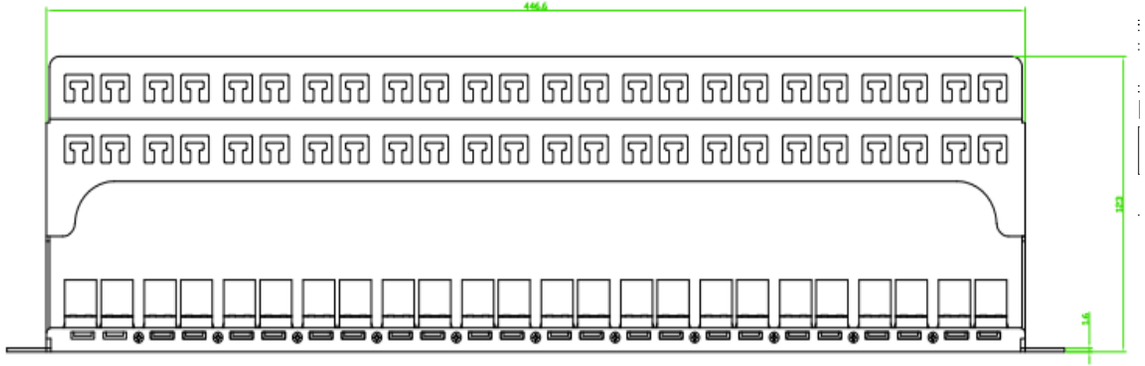





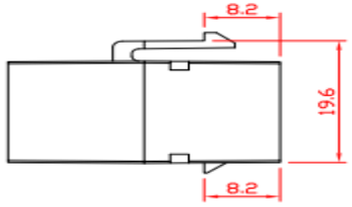



Production Description

1. Designed for use with Cat6 UTP Patch Cables
2. 24port Cat6 patch panel with Cat6 UTP Bending In-line keystone jacks
3. 1U 19”metal plate housing, black color painting
4. Fitting for 23AWG/24AWG/26AWG/28AWG cables
5. Cabling sequence: T568A & B.
6. Testing condition of transmitting capability: 500MHz.

TOLERANCES LINEAR (mm) X => 1 .X => 0.5 .XX => 0.30 XXX => 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL: /	ENCONNEX	PART NUMBER: ECX-48-CAT6-PNL-FT
	DESCRIPTION: Copper 48 Panel	2700 Mill Street, Unit 400,Reno, NV 89502	DESCRIPTION: Connectivity
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: Jack	ORG DATE: 2020-10-22
		APPROVED BY: Mike	REV DATE: 2020-10-22
UNITS: mm [in]	INTERPRET TO ASME Y14.100	SIZE: A4 SCALE: 1 : 1	SHEET: 1/1 REV: A