Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	11/21/2019	RELEASE	KP/RF

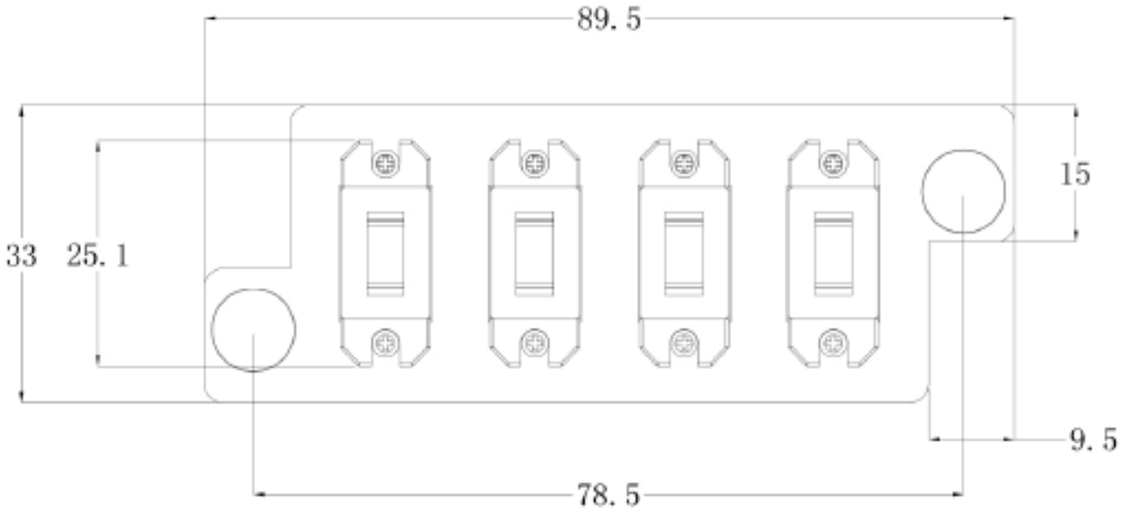

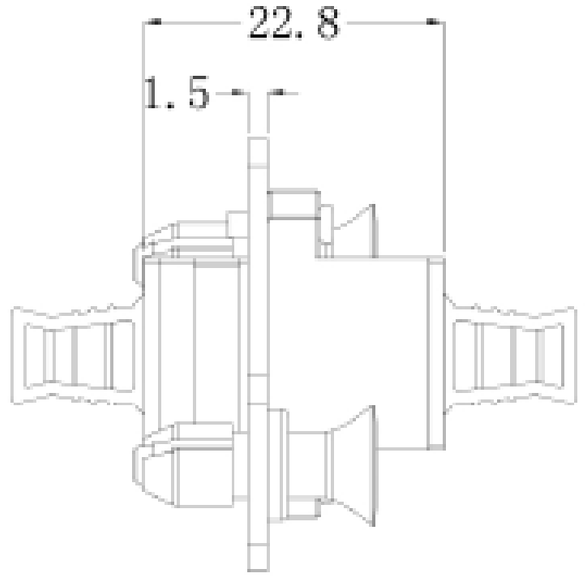

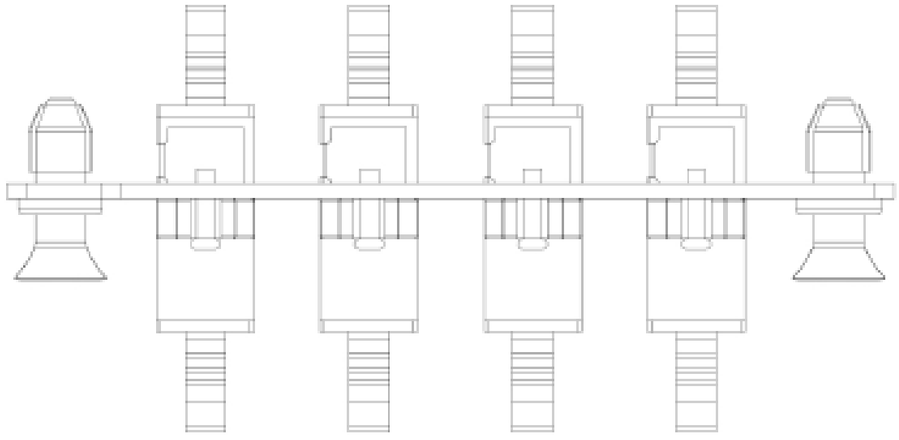

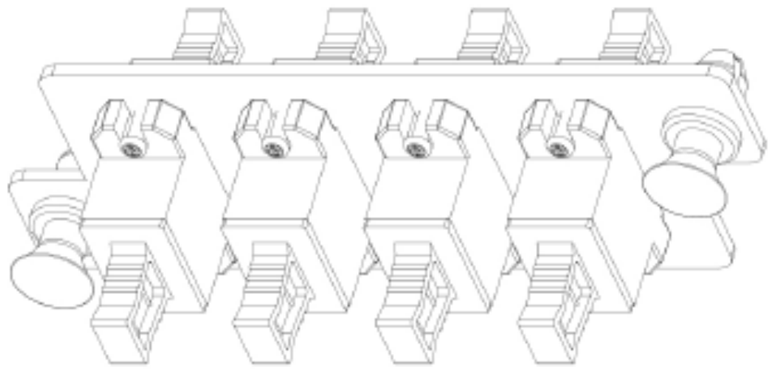

Tolerance			
Length	Super	High	Comm
<3	0. 05	0. 1	--
3TO<6	0. 05	0. 1	0. 2
6TO<30	0. 1	0. 2	0. 5
30TO<120	0. 15	0. 3	0. 8
120TO<315	0. 2	0. 5	1. 2

MTP adapter is aligned with black adapters and flange

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	ENCONNEX 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-ADP-MTP-4P-BK
	FINISH:		DESCRIPTION: ECX-ADP-MTP-4P-BK
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: KOMAL PARAB	ORG DATE: 11/21/2019
		APPROVED BY: R. FAULKNER	REV DATE: 11/21/2019
UNITS: mm [in]	INTERPRET TO ASME Y14.100	SIZE: A3 SCALE: N/A	SHEET: 1/1 REV: A