
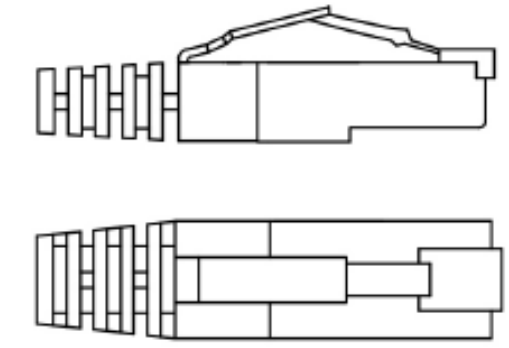
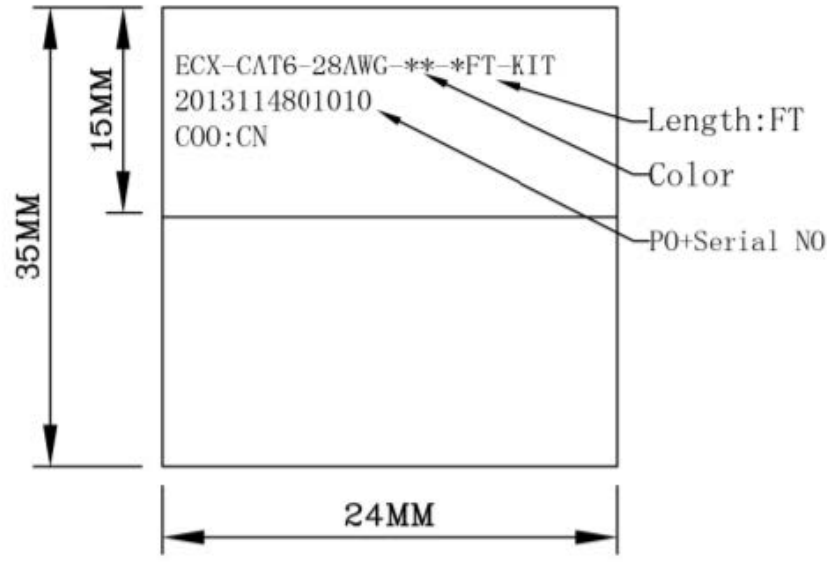
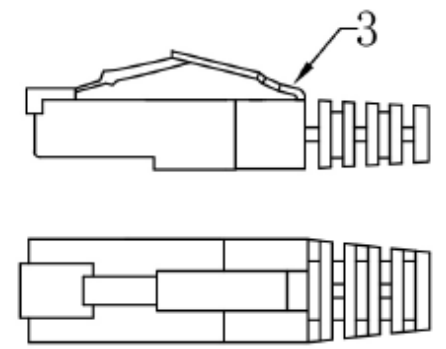


REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-08-12	RELEASE	KP/RF

Notes/Instructions:

1. CABLE : UTP CAT.6 CABLE. 4P*28AWG (7/0.12mm BC)
 OUTER JACKET:PVC, COLOR:****, OD:3.8±0.20mm.
 PVC Fire Resistant Class: UL, CMR.
 JACKET MARKER: Enconnex AWM 2835 28AWG CAT6 CABLE
2. CONN. :P1 & P2: 8P8C PLUG, LONG BODY, DOUBLE LAY, GOLD PLATED.
 Fire Resistant Class:UL94-V2.
3. ALL HOOD: PC BOOT, 0D4. 0MM.
 Fire Resistant Class: UL94-V2
4. White And Transparent Lable, 24*35mm.
5. CABLE ASSY MUST PASS CONTINUITY TEST.
6. PACKING: EACH CABLE IN POLY-BAG.

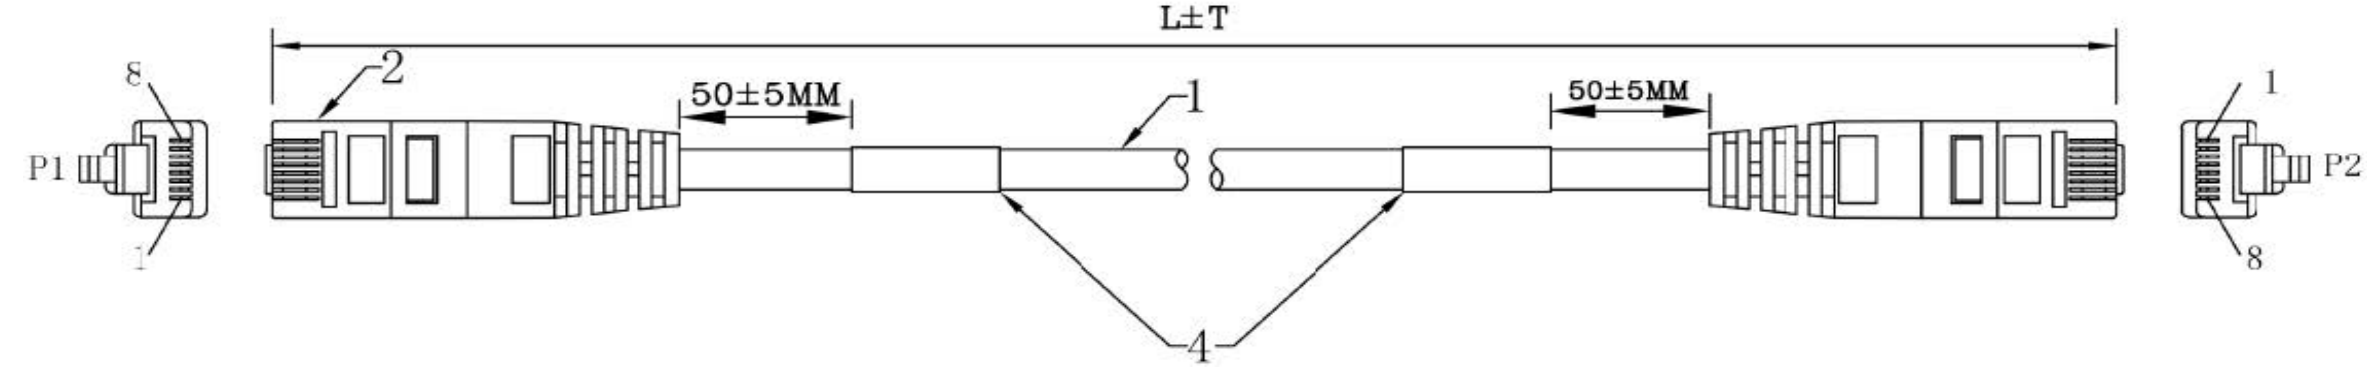


WIRE CONNECTION

COLOR (568B)	P1	PAIRS	P2
WHITE/ORANGE	1	————	1
ORANGE	2	————	2
WHITE/GREEN	3	————	3
BLUE	4	————	4
WHITE/BLUE	5	————	5
GREEN	6	————	6
WHITE/BROWN	7	————	7
BROWN	8	————	8

CHART:

L	T
L<=1M	±30MM
1M<L<=5M	±50MM
5M<L<=10M	±100MM
L>10M	±150MM

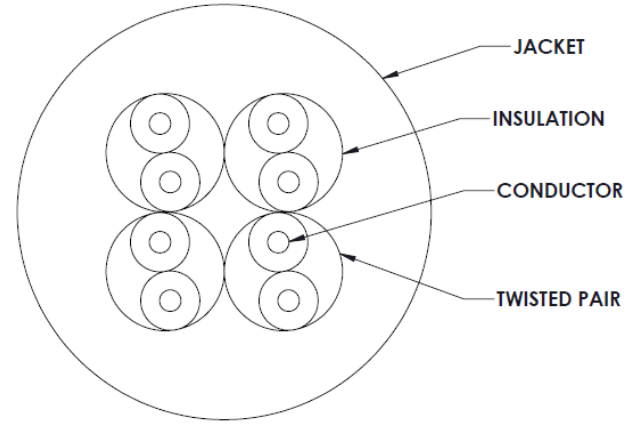

Structure

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ±1 X.X = ±0.5 X.XX = ±0.30 X.XXX = ±0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-CX-CAT6-28AWG-**-*FT-KIT
	FINISH:		DESCRIPTION: Cat6 Thin OD Cable ECX-CAT6-28AWG
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: KOMAL PARAB	ORG DATE: 2019-08-12
	UNITS: mm [in]	APPROVED BY: R. FAULKNER	REV DATE: 2019-08-12
	INTERPRET TO ASME Y14.100	SIZE: A3	SCALE: N/A
		SHEET: 1/1	REV: A

Notes/Instructions:

1. Cable is secured with the tie and packed in the Poly-bag before placing it in the box for shipping purpose as shown in the picture above.
2. Check Table 1 for the colour availability.

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-08-12	RELEASE	KP/RF

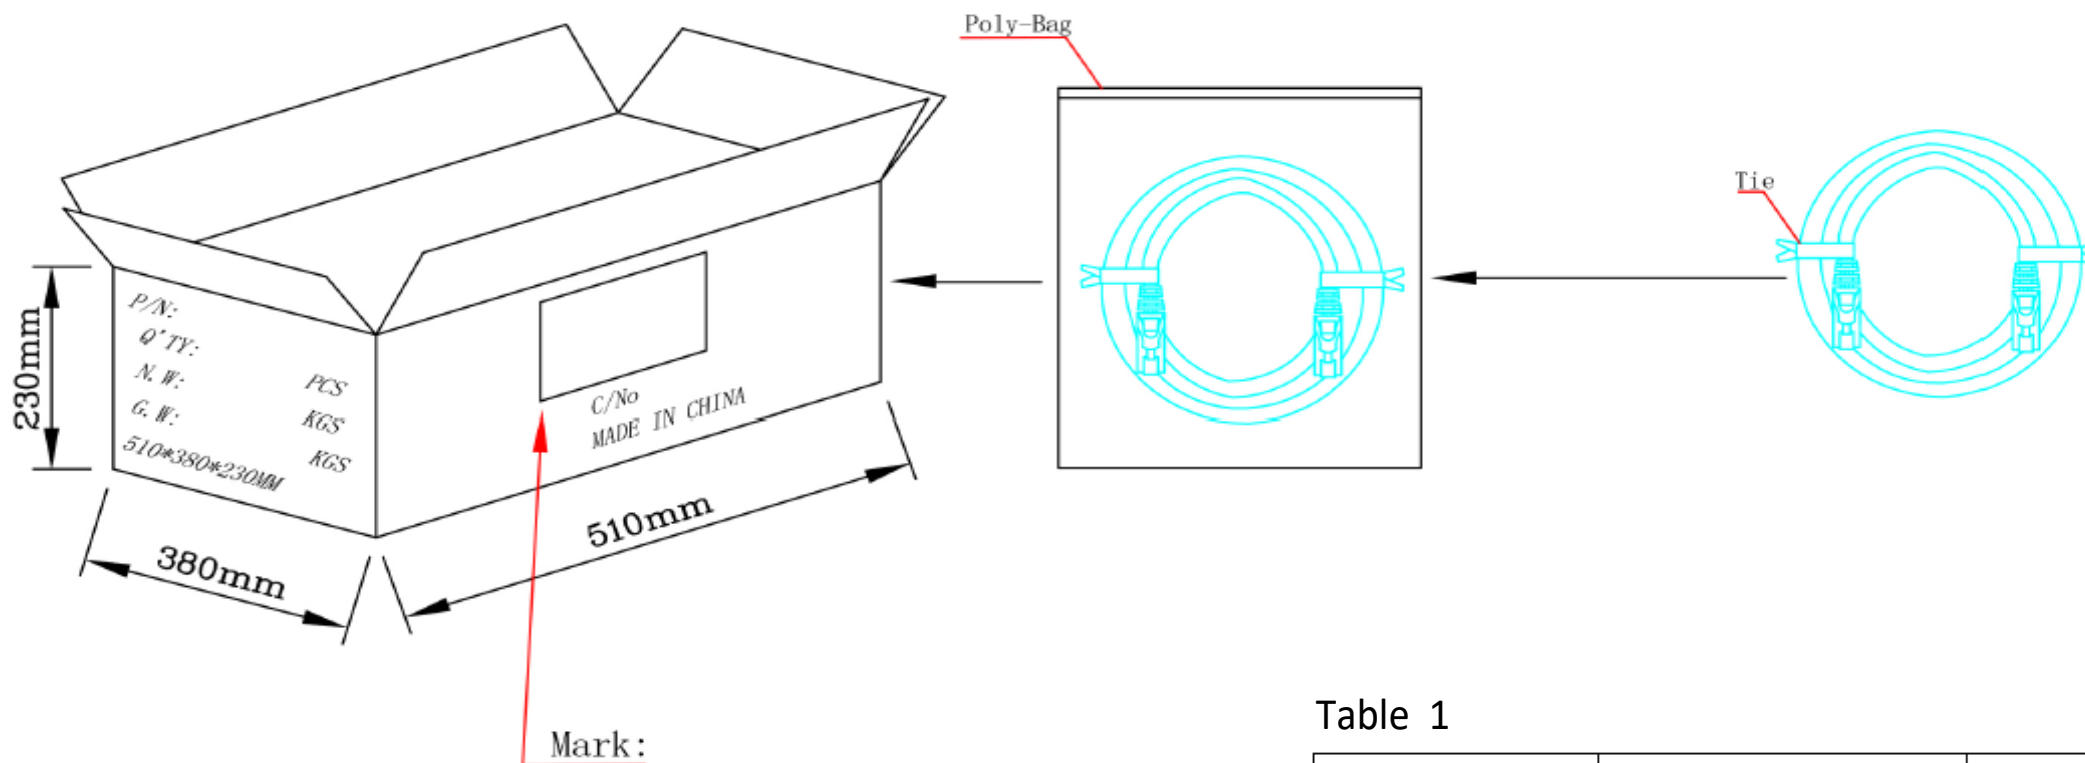







Table 1

CABLE CABLING		COLOR	LENGTH
Cat6 Thin OD Cable	ECX-CAT6-28AWG-PR	PURPLE	1FT, 3FT, 5FT, 7FT, 9FT
	ECX-CAT6-28AWG-YW	YELLOW	1FT, 3FT, 5FT, 7FT, 9FT
	ECX-CAT6-28AWG-GY	GRAY	1FT, 3FT, 5FT, 7FT, 9FT
	ECX-CAT6-28AWG-BK	BLACK	1FT, 3FT, 5FT, 7FT, 9FT
	ECX-CAT6-28AWG-WH	WHITE	1FT, 3FT, 5FT, 7FT, 9FT
	ECX-CAT6-28AWG-RD	RED	1FT, 3FT, 5FT, 7FT, 9FT
	ECX-CAT6-28AWG-GN	GREEN	1FT, 3FT, 5FT, 7FT, 9FT
	ECX-CAT6-28AWG-OR	ORANGE	1FT, 3FT, 5FT, 7FT, 9FT
	ECX-CAT6-28AWG-BL	BLUE	1FT, 3FT, 5FT, 7FT, 9FT





www.enconnex.com

Part No.	ECX-CAT6-28AWG-YW-0.5FT-KIT
PO NO.	IMS20015705
COO	CN
N.W. (kgs)	
G.W. (kgs)	
MEAS (mm)	510*380*230
Master Qty (pcs)	100

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 ENCONNEX 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-CX-CAT6-28AWG- **FT-KIT
	FINISH:		DESCRIPTION: Cat6 Thin OD Cable ECX-CAT6-28AWG
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: KOMAL PARAB APPROVED BY: R. FAULKNER	ORG DATE: 2019-08-12 REV DATE: 2019-08-12	
UNITS: mm [in]	INTERPRET TO ASME Y14.100	SIZE: A3	SCALE: N/A
		SHEET: 1/1	REV: A