
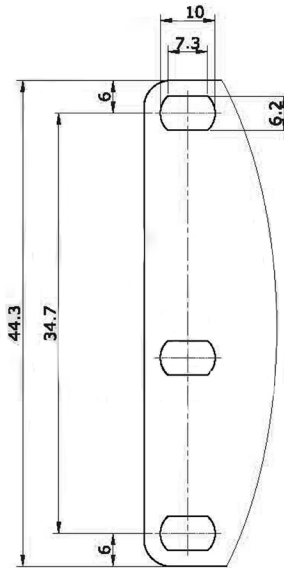
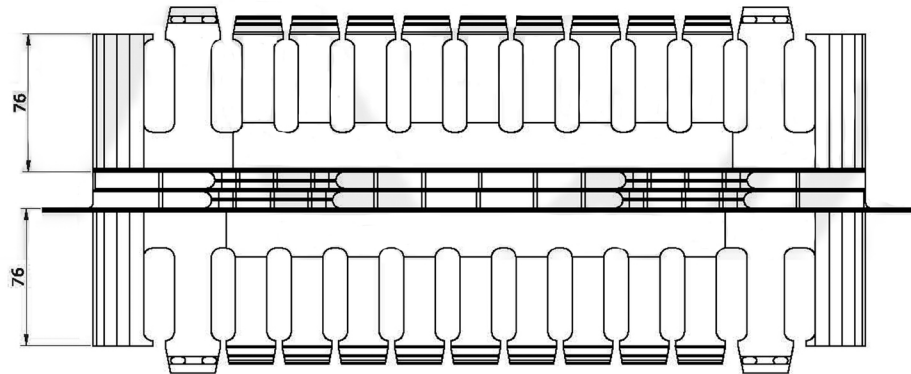



Notes/Instructions:



| REV | REV DATE | DESCRIPTION | APPROVAL |
|-----|------------|-------------|----------|
| A | 2019-03-25 | RELEASE | SD/Rf |

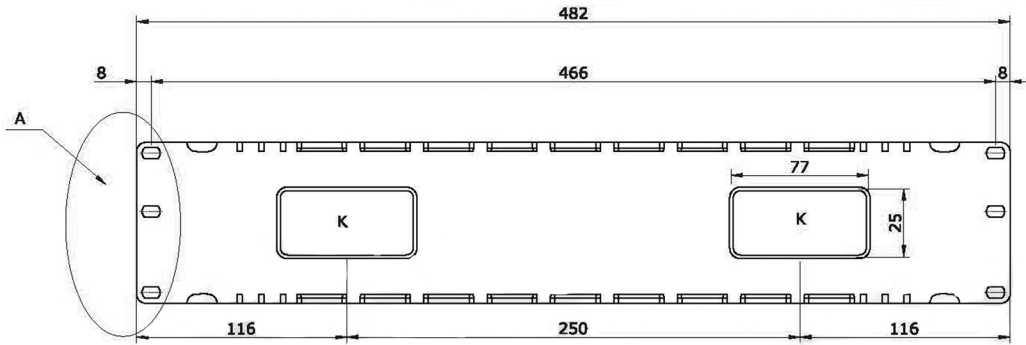

A-A

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

| | | | |
|--|---|---|--|
| TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25° | MATERIAL: PVC |  ENCONNEX | PART NUMBER: ECX-CBLMGR-HZ-DBL-1U |
| | FINISH: | | DESCRIPTION: 1u double sided plastic cable manager with plastic fingers and covers. |
|  | DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX | DRAWN BY: SAM DING | ORG DATE: 2019-03-25 |
| | INTERPRET TO ASME Y14.100 | APPROVED BY: R. FAULKNER | REV DATE: 2019-03-25 |
| UNITS: mm [in] | SIZE: A4 | SCALE: N/A | SHEET: 1/1 |
| | | | REV: A |