

8

7

6

5

4

3


2

1

Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-08-12	RELEASE	Mike
	2022-08-10	Housing color changed to Beige	Mike

DUPLEX FIBER OPTIC CABLE LC-LC 50/125 OM3 OFNR

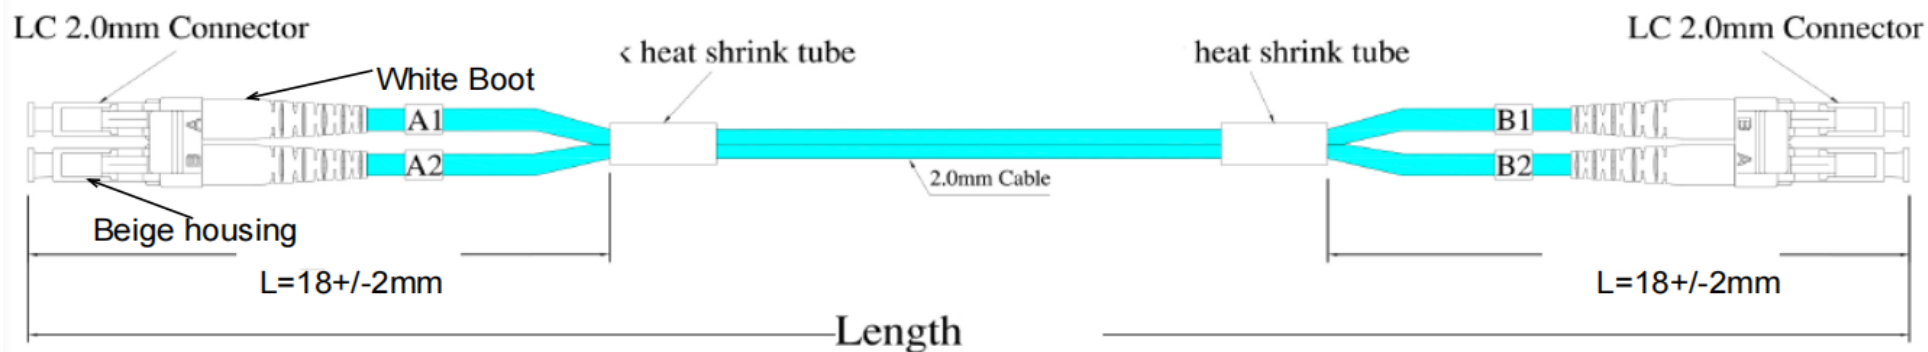


Specifications:

Specifications:

Fiber Mode	MM
Type	LC-LC
Cable Diameter (mm)	Φ 2.0
Cable Color	Aqua
Core Diameter (um)	50/125
Insertion Loss (dB)	≤ 0.25
Return Loss (dB)	≥ 35
Operating Temperature (°C)	-20~+75
Storage Temperature (°C)	-20~+85



Length Tolerance:

Length (M)	Tolerance
0 < L ≤ 20	+20CM / -0
20 < L	+1.1% / -0

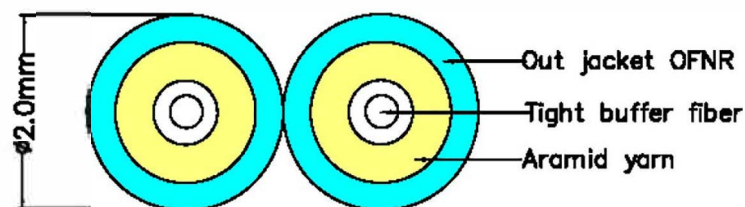

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X => 1 .X => 0.5 .XX => 0.30 .XXX => 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL: /	 ENCONNEX 2700 Mill Street, Unit 400, Reno, NV 89502	PART NUMBER: ECX-LCLC1-302R-XM
	DESCRIPTION: LC-LC Duplex Multimode OM3		DESCRIPTION: Connectivity
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: Jack APPROVED BY: Mike	ORG DATE: 2019-08-12 REV DATE: 2022-08-10
UNITS: mm [in]	INTERPRET TO ASME Y14.100	SIZE: A4 SCALE: 1 : 1	SHEET: 1/1 REV: B
4	3	2	1