
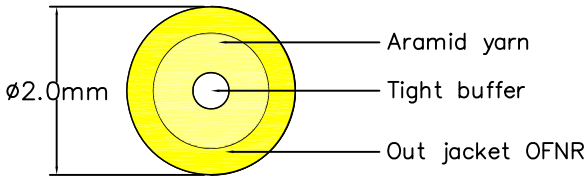


Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2022-05-18	RELEASE	Mike

LC-LC Fiber Loopback,SM 9/125 OFNR

LC 2.0mm Connector

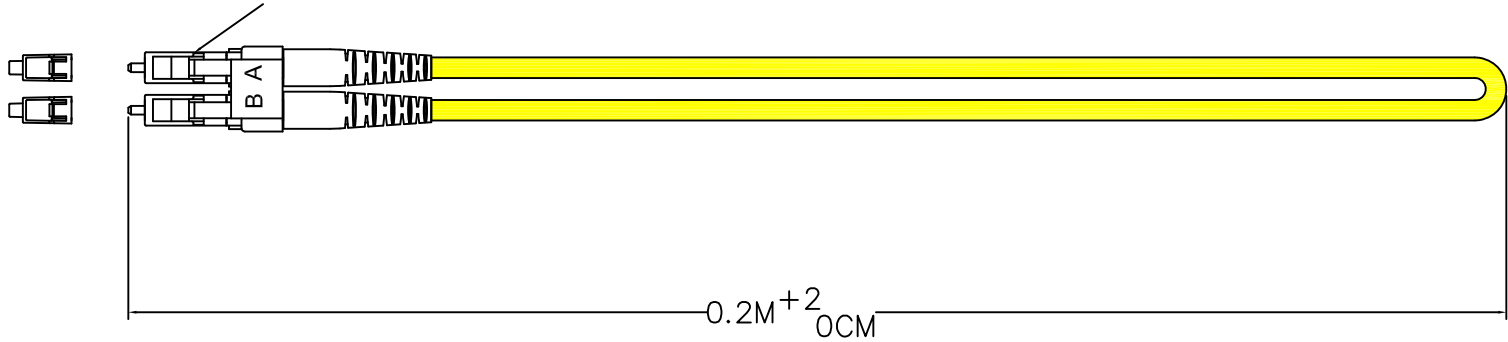



Length Tolerance:

Length(M)	Total Length Tolerance
L≤1	+5CM/-0
1<L≤10	+10CM/-0
10<L	+L1%/-0

Specifications:

Fiber Mode	SM
Type	LC Loopback
Cable Diameter(mm)	ø2.0
Cable Color	Yellow
Core Diameter(um)	9/125
Insertion Loss(dB)	≤0.25
Return Loss(dB)	≥ 50
Operating Temperature (°C)	-20~+70
Storage Temperature (°C)	-20~+70

Notes:
This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X => 1 .X => 0.5 .XX => 0.30 XXX => 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 2700 Mill Street, Unit 400,Reno, NV 89502	PART NUMBER: ECX-LCLC2-501R-LB
	DESCRIPTION: LC Loopback SM		DESCRIPTION: Connectivity
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: Jack	ORG DATE: 2022-05-18
	INTERPRET TO ASME Y14.100	APPROVED BY: Mike	REV DATE: 2022-05-18
UNITS: mm [in]	SIZE: A4	SCALE: 1 : 1	SHEET: 1/1 REV: A

4

3

2

1