



Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2022-04-11	RELEASE	Mike

DUPLEX FIBER OPTIC CABLE LC-LC 9/125 OFNR

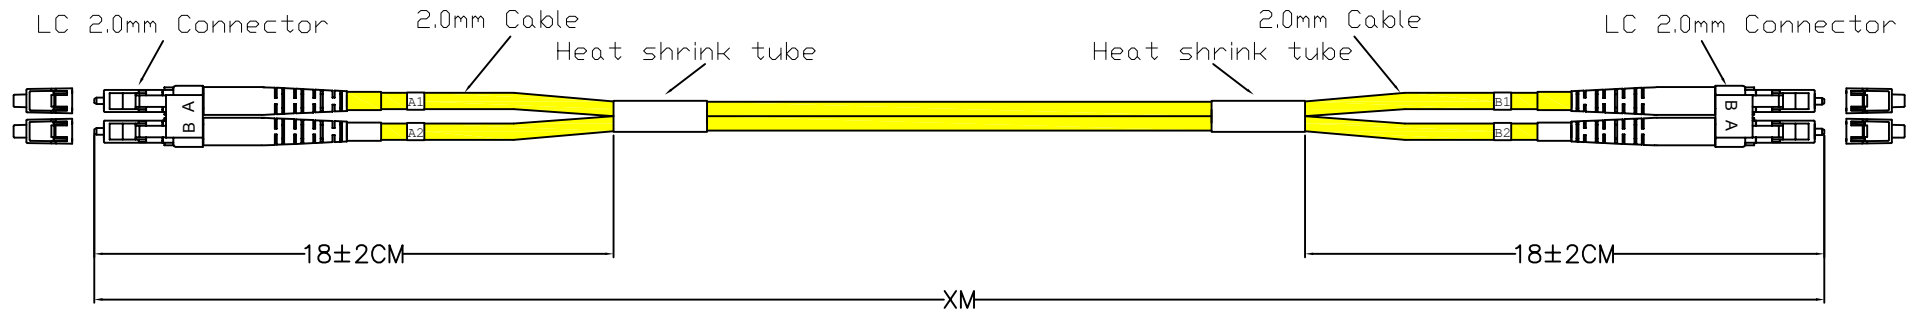

Remark: Packed on Spool




Specifications:

Fiber Mode	SM
Type	LC-LC
Cable Diameter(mm)	Φ 2.0
Cable Color	Yellow
Core Diameter(um)	9/125
Insertion Loss(dB)	≤0.25
Return Loss(dB)	≥ 50
Operating Temperature (°C)	-20~+70
Storage Temperature (°C)	-20~+70


Length Tolerance:

Length(M)	Total Length Tolerance
L≤1	+5CM/-0
1<L≤10	+10CM/-0
10<L	+L1%/-0

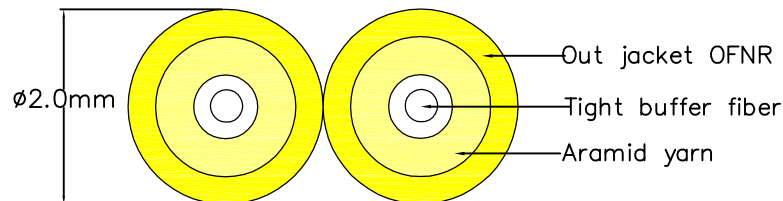

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X => 1 .X => 0.5 .XX => 0.30 .XXX => 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL: /	 2700 Mill Street, Unit 400, Reno, NV 89502	PART NUMBER: ECX-LCLC2-502R-XM-SP
	DESCRIPTION: LC TO LC SM		DESCRIPTION: Connectivity
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: Jack	ORG DATE: 2022-04-11
	INTERPRET TO ASME Y14.100	APPROVED BY: Mike	REV DATE: 2022-04-11
UNITS: mm [in]	4	SIZE: A4 SCALE: 1 : 1	SHEET: 1/1 REV: A