
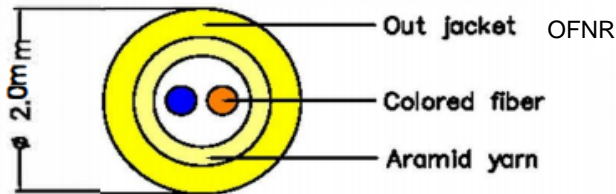


Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2022-03-10	RELEASE	Mike

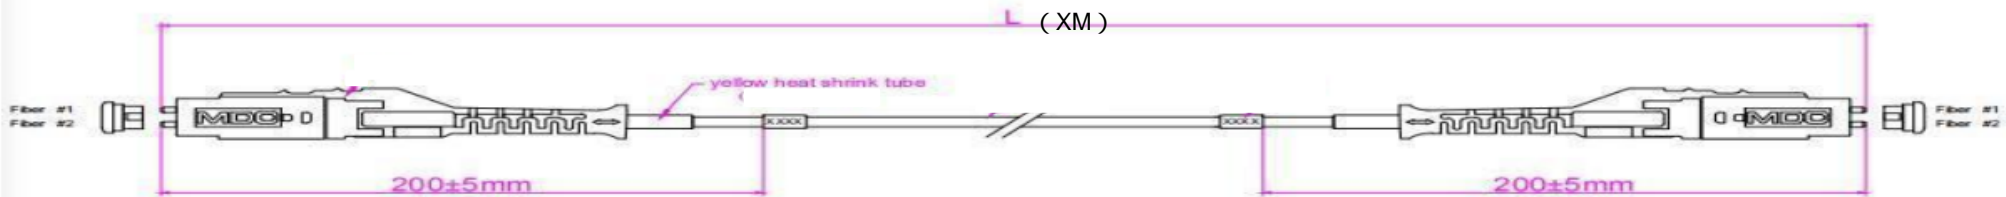



Specifications:

Fiber Mode	SM
Type	MDC TO MDC
Cable Diameter(mm)	ø2.0
Cable Color	Yellow
Core Diameter(μm)	9/125
Insertion Loss(dB)	≤0.25
Return Loss(dB)	≥ 55
Operating Temperature()	-20~+70
Storage Temperature()	-20~+70

Length Tolerance:

Length(M)	Tolerance
0<L≤20	+20CM/-0
20<L	+L1%/-0

Notes:
This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X => 1 .X => 0.5 .XX => 0.30 XXX => 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL: /	 ENCONNEX	PART NUMBER: ECX-MDCMDCU-502R-XM
	DESCRIPTION: MDC TO MDC (SM)	2700 Mill Street, Unit 400,Reno, NV 89502	DESCRIPTION: connectivity
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: Jack	ORG DATE: 2022-03-10
	INTERPRET TO ASME Y14.100	APPROVED BY: Mike	REV DATE: 2022-03-10
UNITS: mm [in]		SIZE: A4	SCALE: 1 : 1
		SHEET: 1/1	REV: A