

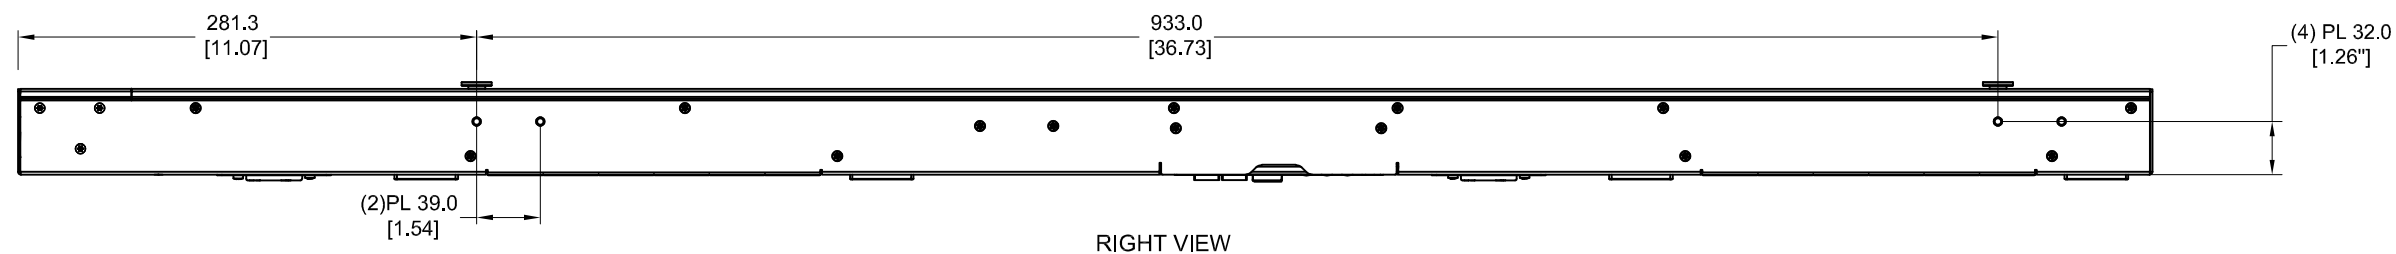
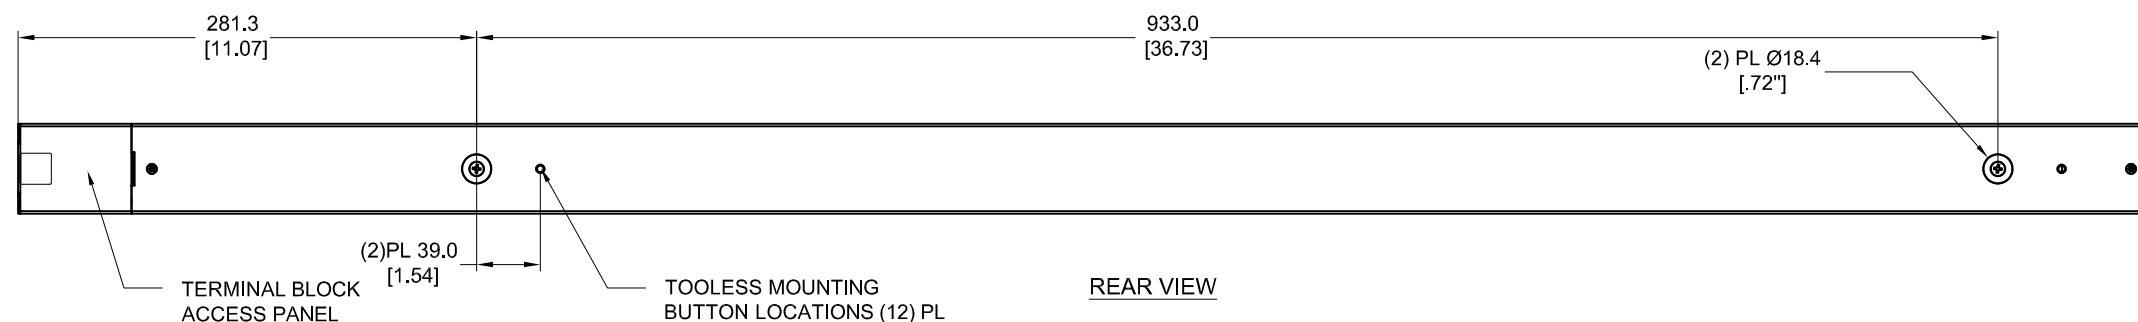
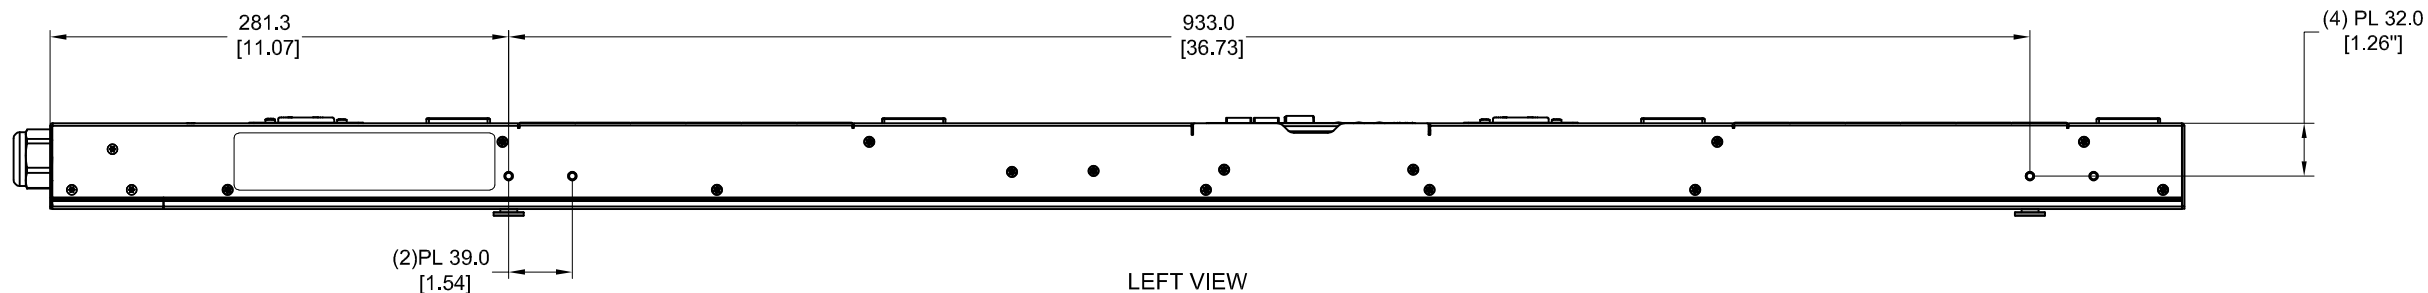


Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2020-04-26	RELEASE	SD/RF




20AMP, DOUBLE-POLE ELECTRO MECHANICAL SWITCH / BREAKER (2)PL

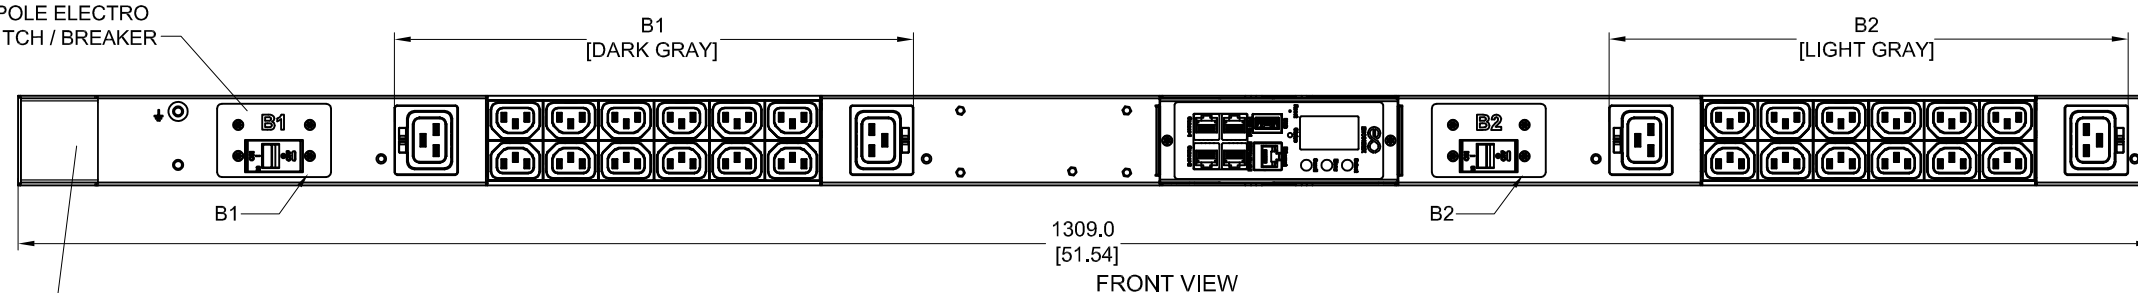

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

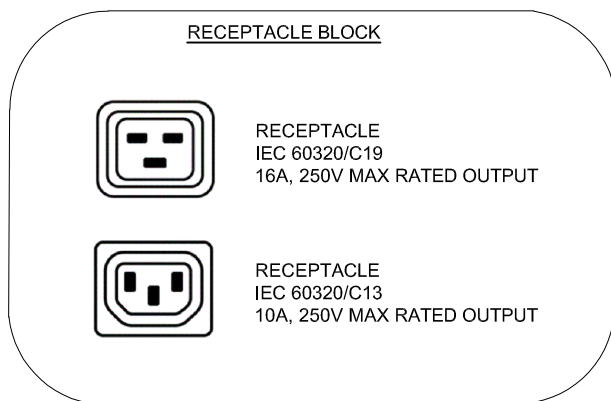

SPECIFICATION:

- STANDARD:
 - UNIT TYPE: INPUT METERED
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY&TYPE: (24)C13, (4)C19
 - INPUT VOLTAGE: 220-240 VAC
 - INPUT CURRENT: SEE PAGE 2
 - BREAKER QTY&TYPE: (2) 20AMP, DOUBLE-POLE
 - INPUT PHASE: SINGLE-PHASE
 - RATED POWER: SEE PAGE 2
 - INPUT PLUG: SEE PAGE 2
 - INPUT POWER CORD: NA / BOTTOM FEED
 - REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL: NONE
- ACCESSORIES: (1) QUICK-START GUIDE

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:		PART NUMBER: ECX-MV1224040-X
	DESCRIPTION:		DESCRIPTION:
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	4670 AIRCENTER CIRCLE, RENO, NV 89502	DRAWN BY: LEO APPROVED BY: R. FAULKNER
UNITS: mm [in]	INTERPRET TO ASME Y14.100	SCALE: 1 : 1	ORG DATE: 2020-04-26 REV DATE: SHEET: 1/3 REV: A

Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2020-04-26	RELEASE	SD/RF

FRONT VIEW	PLUG/	SKU NO.	INPUT CURRENT	RATED POWER
	 INPUT RECEPTACLE IEC 60320/C20 16A, 250V MAX RATED INPUT	ECX-MV1224040-A	20 A (16A DERATED)	3.7kVA
	 PLUG NEMA L6-30P, 2P 3W 30A, 250V MAX RATED INPUT 24A DERATED	ECX-MV1224040-E	30 A (24A DERATED)	5.0kVA
	 PLUG IEC 60309, 2P 3W, 6H IP44 (SPASHPROOF) 32A, 200-250V MAX RATED INPUT	ECX-MV1224040-P	32A	7.36kVA

Notes:


This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-MV1224040-X	
	DESCRIPTION:		DESCRIPTION:	
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	 INTERPRET TO ASME Y14.100	DRAWN BY: LEO APPROVED BY: R. FAULKNER	ORG DATE: 2020-04-26 REV DATE:	
UNITS: mm [in]		SIZE: A3	SCALE: 1 : 1	SHEET: 2/3

REV	REV DATE	DESCRIPTION	APPROVAL
A	2020-04-26	RELEASE	SD/RF



Notes/Instructions:

Internal Wire Type: UL AWM 1015, 105°C, 12/18AWG
 1: Line1/R/X Wire Color = Brown
 5: Earth ground Wire Color = Green/Yellow (Stripe)
 3: Line2/S/Y Wire Color = Blue

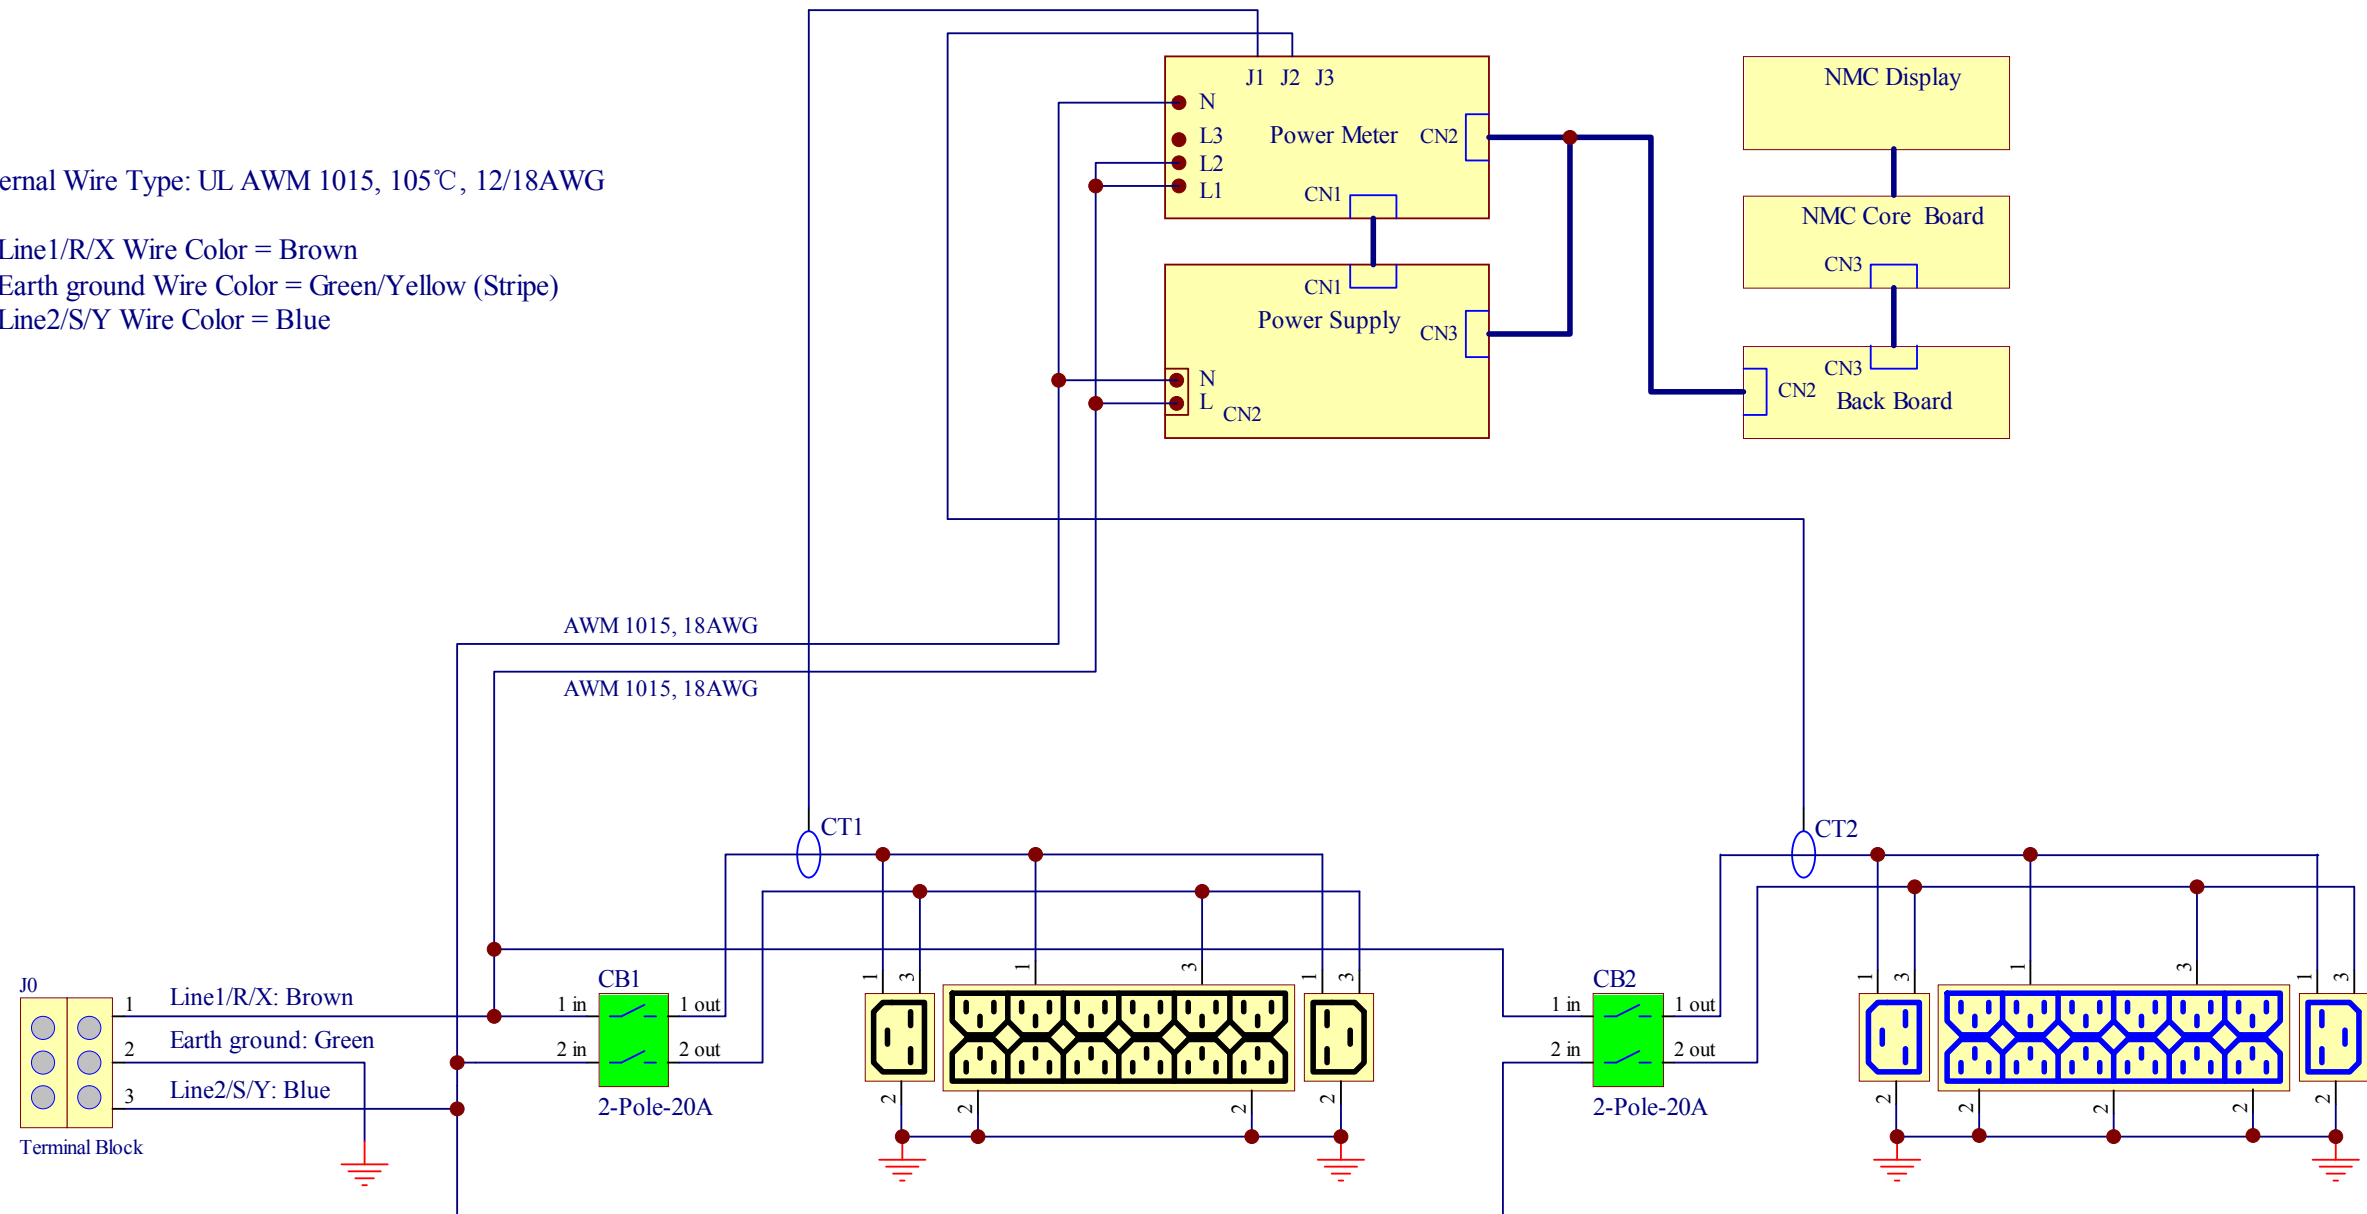

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-MV1224040-X
	DESCRIPTION:		DESCRIPTION:
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: LEO APPROVED BY: R. FAULKNER	ORG DATE: 2020-04-26 REV DATE:	SHEET: 3/3 REV: A
UNITS: mm [in]	INTERPRET TO ASME Y14.100	SIZE: A3	SCALE: 1 : 1