



REV.	CONTENT	BY
1.3	CHANGE THE CABLE OD	FAN
1.4	TABLE1,INCREASE 3M 30AWG,5M 26AWG	RITA

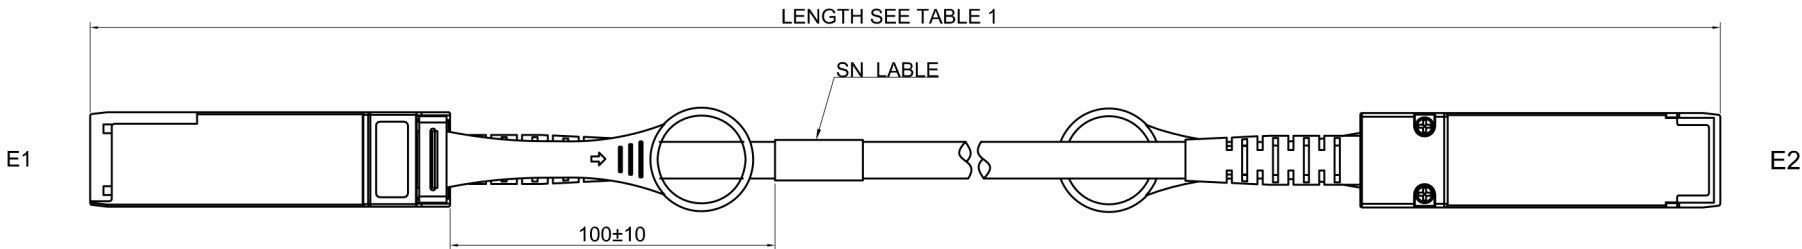




TYPE A

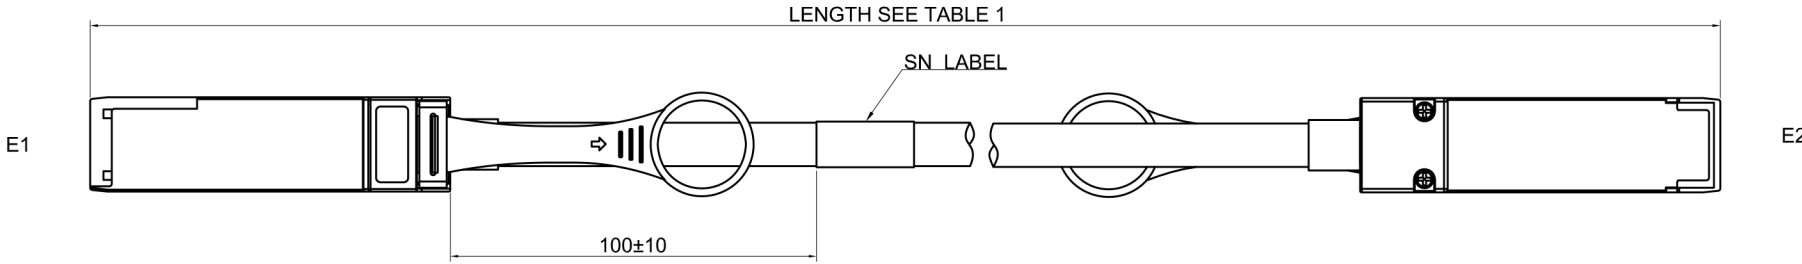




TYPE B

- NOTES:
- 1. CABLE DISTANCE DEPENDENCE ON WIRE GAUGE DATA RATE,AND HOST BOARD DRIVER CAPABILITIES .
 - 2. MATERIALS:
BACKSHELLS: ZINC DIE CAST WITH BRIGHT NICKEL PLATING
DE-LATCH: STAINLESS STEEL WITH OVER MOLDED NYLON
SCREW: STAINLESS STEEL
CABLE: SOLID SILVER PLATED COPPER. 2 INDIVIDUAL SHIELDED PAIRS WITH 8 SHIELDED OVERALL (JACKET COLOR: BLACK)
PCB: ROGERS, 6 LAYERS,(AC COUPLING)
 - 3. IMPEDANCE-100 OHMS DIFFERENTIAL.
 - 4. TWO-WIRE SERIAL MEMORY: EEPROM(256BYTES),DIGITAL MONITORING & CONTROL FUNCTION AND MEMORY PAGE NOT SUPPORTED.
 - 5. THIS PRODUCT MEETS THE RESTICTION OF HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC REQUIREMENTS (ROHS) .
 - 6. COMPLIANT TO INDUSTRY STANDARDS: SFF-8679 .



X. ±0.2	X° ±2°	UNITS mm	NAME(CUSTOMER USE)	 ENCONNEX		
.X ±0.1	X° ±1.5°	MAT'L				
.XX ±0.1	XX° ±1°	FINISH Q'TY	PRODUCT NO.	TITLE:		
.XXX ±0.03	.XXX° ±0.5°		See Table 1	ZQSFP+ PASSIVE COPPER CABLE ASSEMBLY		
THESE DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF 10GTEK TRANSCEIVERS CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF 10GTEK TRANSCEIVERS CO.,LTD			APPD: Nicky 2017.09.21	DWG NO:		
			CHKD: Nicky 2017.09.21	W-R&D-P090		
		DR: Rita 2017.09.21		SCALE	SHEET	REV.
				1:1	1/3	1.4

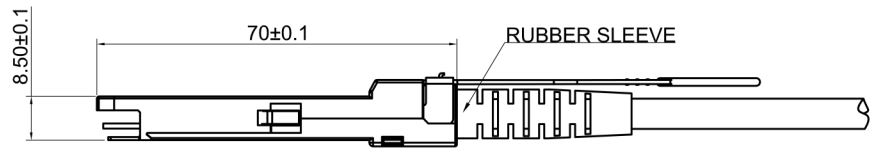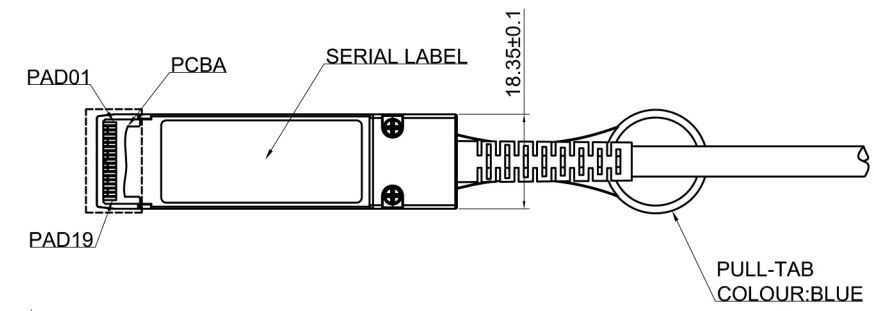

TYPE A

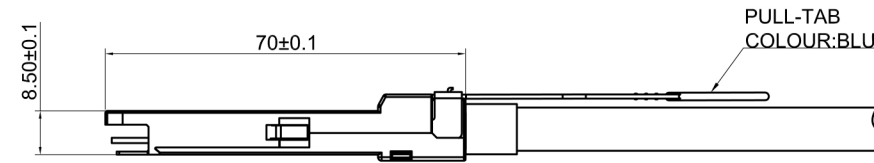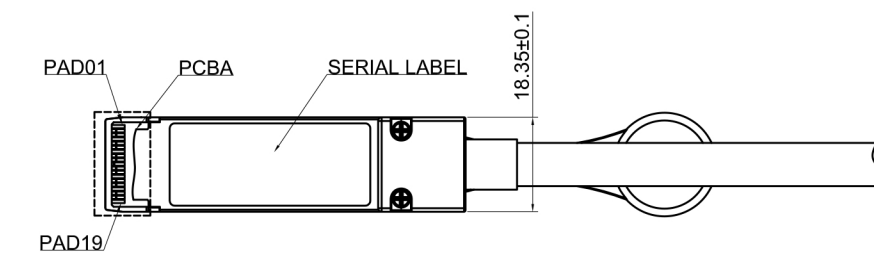


TYPE B



X. ±0.2	X° ±2°	UNITS mm	NAME(CUSTOMER USE)	 ENCONNEX
.X ±0.1	X° ±1.5°			
.XX ±0.1	XX° ±1°	PRODUCT NO. SEE TABLE 1:	TITLE: ZQSFP+ PASSIVE COPPER CABLE ASSEMBLY	
.XXX ±0.03	.XXX° ±0.5°			APPD: Nicky 2017.09.21
THESE DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF 10GTEK TRANSCEIVERS CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF 10GTEK TRANSCEIVERS CO.,LTD	FINISH	CHKD: Nicky 2017.09.21		
				Q'TY

TABLE 1:

ITEM	10GTEK P/N	DESCRIPTION	LENGTH	CABLE AWG	CONNECTION TYPE
1	CAB-ZQP/ZQP-P50CM-00-6-2	100G ZQSFP+ PASSIVE COPPER CABLE ASSEMBLY, 50CM 30AWG PASSIVE	500±10mm	30AWG	A
2	CAB-ZQP/ZQP-P1M-00-6-2	100G ZQSFP+ PASSIVE COPPER CABLE ASSEMBLY, 1M 30AWG PASSIVE	1000±30mm	30AWG	A
3	CAB-ZQP/ZQP-P2M-00-6-2	100G ZQSFP+ PASSIVE COPPER CABLE ASSEMBLY, 2M 30AWG PASSIVE	2000±30mm	30AWG	A
4	CAB-ZQP/ZQP-P3M-00-6-2	100G ZQSFP+ PASSIVE COPPER CABLE ASSEMBLY, 3M 30AWG PASSIVE	2000±30mm	30AWG	A
5	CAB-ZQP/ZQP-P3M-00-9-2	100G ZQSFP+ PASSIVE COPPER CABLE ASSEMBLY, 3M 26AWG PASSIVE	3000±30mm	26AWG	B
6	CAB-ZQP/ZQP-P5M-00-9-2	100G ZQSFP+ PASSIVE COPPER CABLE ASSEMBLY, 5M 26AWG PASSIVE	5000±50mm	26AWG	B

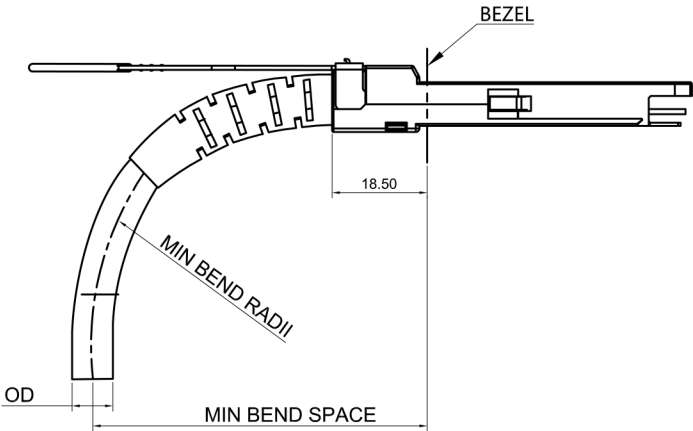

CABLE CONNECTION:

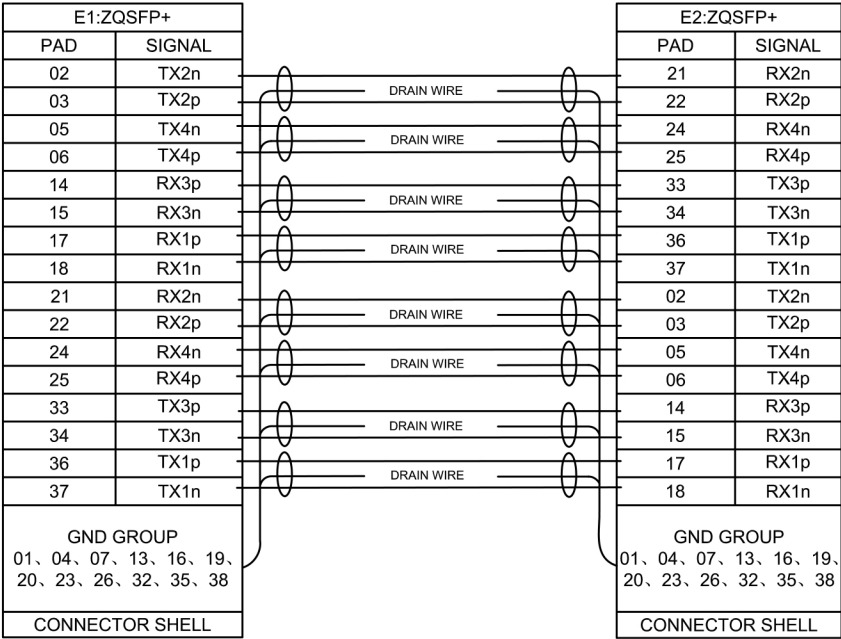


TABLE 2

BEND RADII			
CABLE AWG	OD(mm)	MIN BEND RADII(mm)	MIN BEND SPACE
30	6.6	33.0	51.5

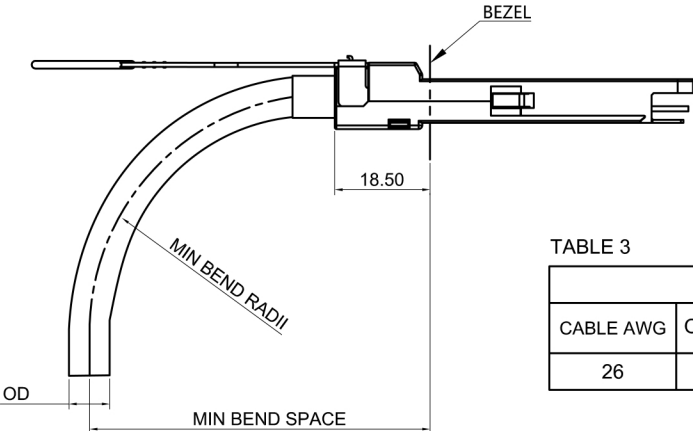


TABLE 3

BEND RADII			
CABLE AWG	OD(mm)	MIN BEND RADII(mm)	MIN BEND SPACE
26	9.20	46.0	64.5

X. ±0.2	X° ±2°	UNITS mm	NAME(CUSTOMER USE)	 ENCONNEX	ENCONNEX		
.X ±0.1	X° ±1.5°	MAT'L					
.XX ±0.1	XX° ±1°	FINISH	PRODUCT NO.	TITLE: ZQSFP+ PASSIVE			
.XXX ±0.03	.XXX° ±0.5°		SEE TABLE 1:	COPPER CABLE ASSEMBLY			
THESE DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF 10GTEK TRANSCEIVERS CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF 10GTEK TRANSCEIVERS CO.,LTD			APPD: Nicky 2017.09.21	DWG NO: W-R&D-P090			
			CHKD: Nicky 2017.09.21				
			DR: Rita 2017.09.21				
					SCALE	SHEET	REV.
					1:1	3/3	1.4