


Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-06-12	RELEASE	SD/YZ

DUPLEX FIBER OPTIC CABLE SC-SC 50/125 OM3 OFNR

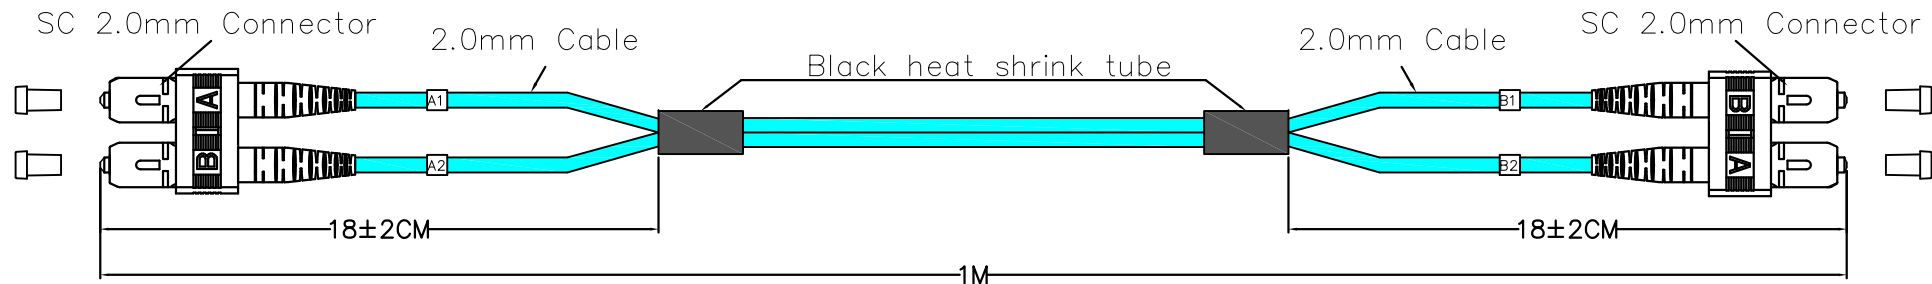


Specifications:

Fiber Mode	MM
Type	SC-SC
Cable Diameter(mm)	φ 2.0
Cable Color	Aqua
Core Diameter(um)	50/125
Insertion Loss(dB)	≤0.25
Return Loss(dB)	≥ 35
Operating Temperature (°C)	-20~+70
Storage Temperature (°C)	-20~+70


Length Tolerance:

Length(M)	Tolerance
0<L≤20	+20CM/-0
20<L	+L1%/-0

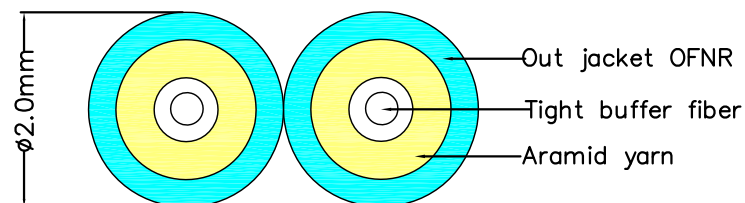

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X => 1 .X => 0.5 .XX => 0.30 .XXX => 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 41424 Christy Street Fremont, CA 94538	PART NUMBER: ECX-SCSC1-302R
	DESCRIPTION:		DESCRIPTION: ABCD----
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY:	ORG DATE: 2019-06-12
	INTERPRET TO ASME Y14.100	APPROVED BY:	REV DATE: 2019-06-12
UNITS: mm [in]	SIZE: A4	SCALE: 1 : 1	SHEET: 1/1