




NOTES:

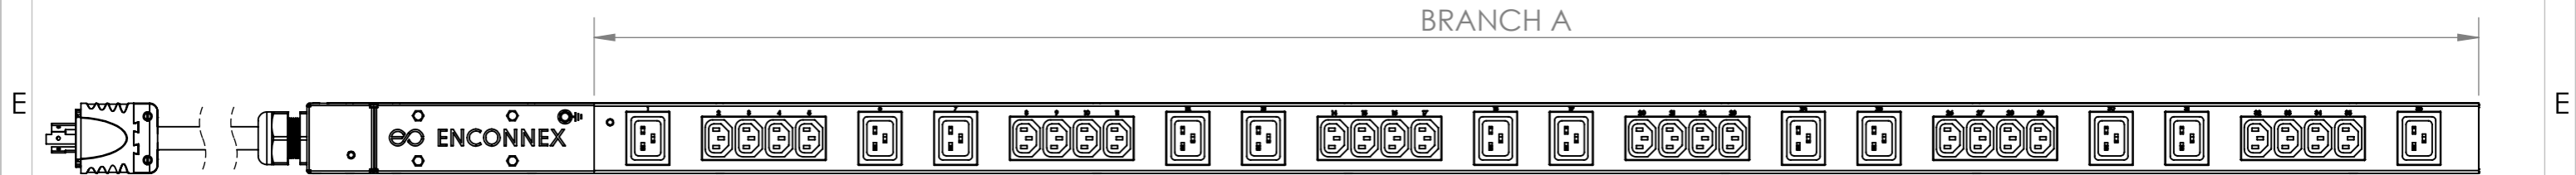


TOP VIEW

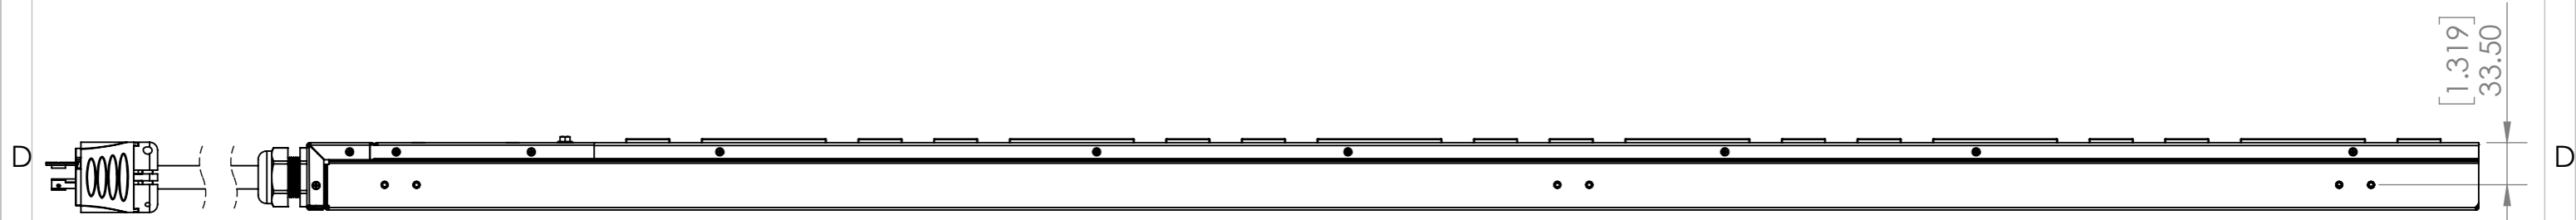




RIGHT VIEW

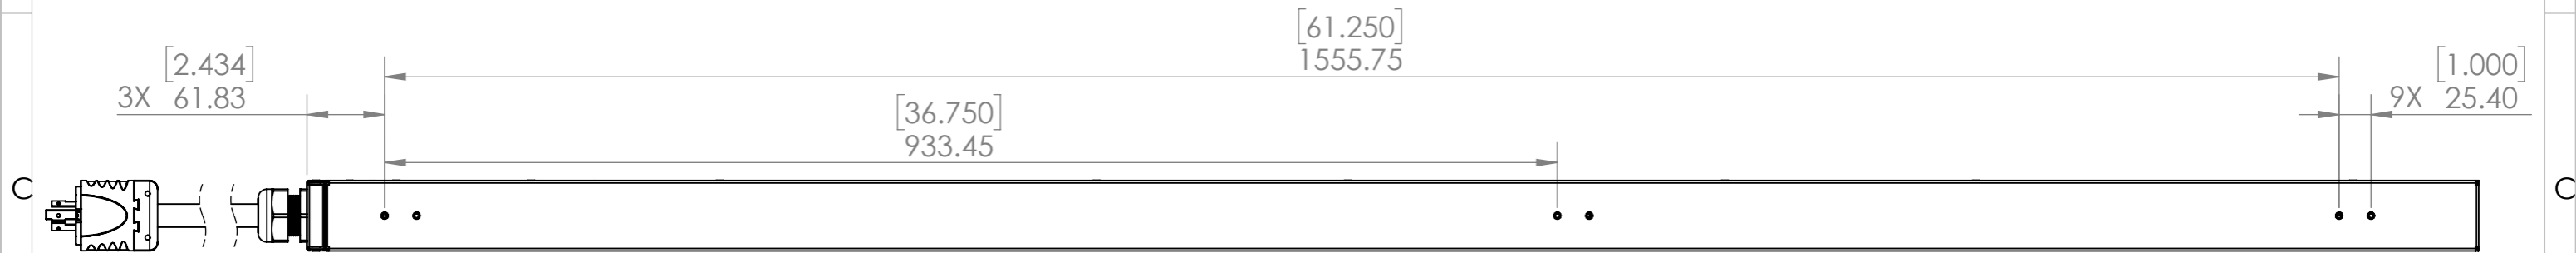

REAR VIEW

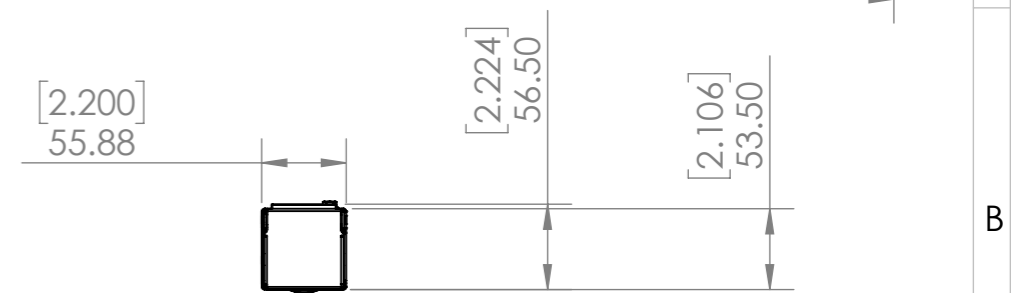

BOTTOM VIEW

PLUG/ RECEPTACLE BLOCK	
	PLUG NEMA L6-20P, 2P-3W 20A, 120/240VAC
	RECEPTACLE IEC 60320/C13 10A, 250V MAX RATED OUTPUT
	RECEPTACLE IEC 60320/C19 16A, 250V MAX RATED OUTPUT

UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:

BASIC INPUT
VERTICAL, OU FULL
(24) C13, (12) C19
120/240VAC
16A
0
SINGLE PHASE
4.8kVA
NEMA L6-20
3m(10') TOP FEED
CSA COMPLIANCE

PROPRIETARY AND CONFIDENTIAL

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

UNLESS OTHERWISE SPECIFIED

X = ± 1
X.X = ± 0.5
X.XX = ± 0.30
X.XXX = ± 0.130
ANGULAR
X = 1°
.X = 0.5°
.XX = 0.25°

COMMENTS:

DRAWN BY

APP. BY

NAME

DATE

FINISH:

CLASS:

MATERIAL:



4670 AIRCENTER CIRCLE
RENO, NV 89502

DESCRIPTION:

200-240V/20A, SINGLE
PHASE, 36 OUTLETS,
24 C13, 12 C19,
L6-20P

SIZE:
A3

EPB1A36C

REV NO:

SCALE: 1:5

WEIGHT:

SHEET: 1 OF 2


UNITS: mm [in]

INTERPRET TO ASME Y14.100


DEBURR AND BREAK SHARP
EDGES/CONTOURS AT 0.2mm
MAX

NOTES:

REV.	DESCRIPTION	DATE	APPROVAL
A	INITIAL RELEASE	07/26/2021	KP/BL

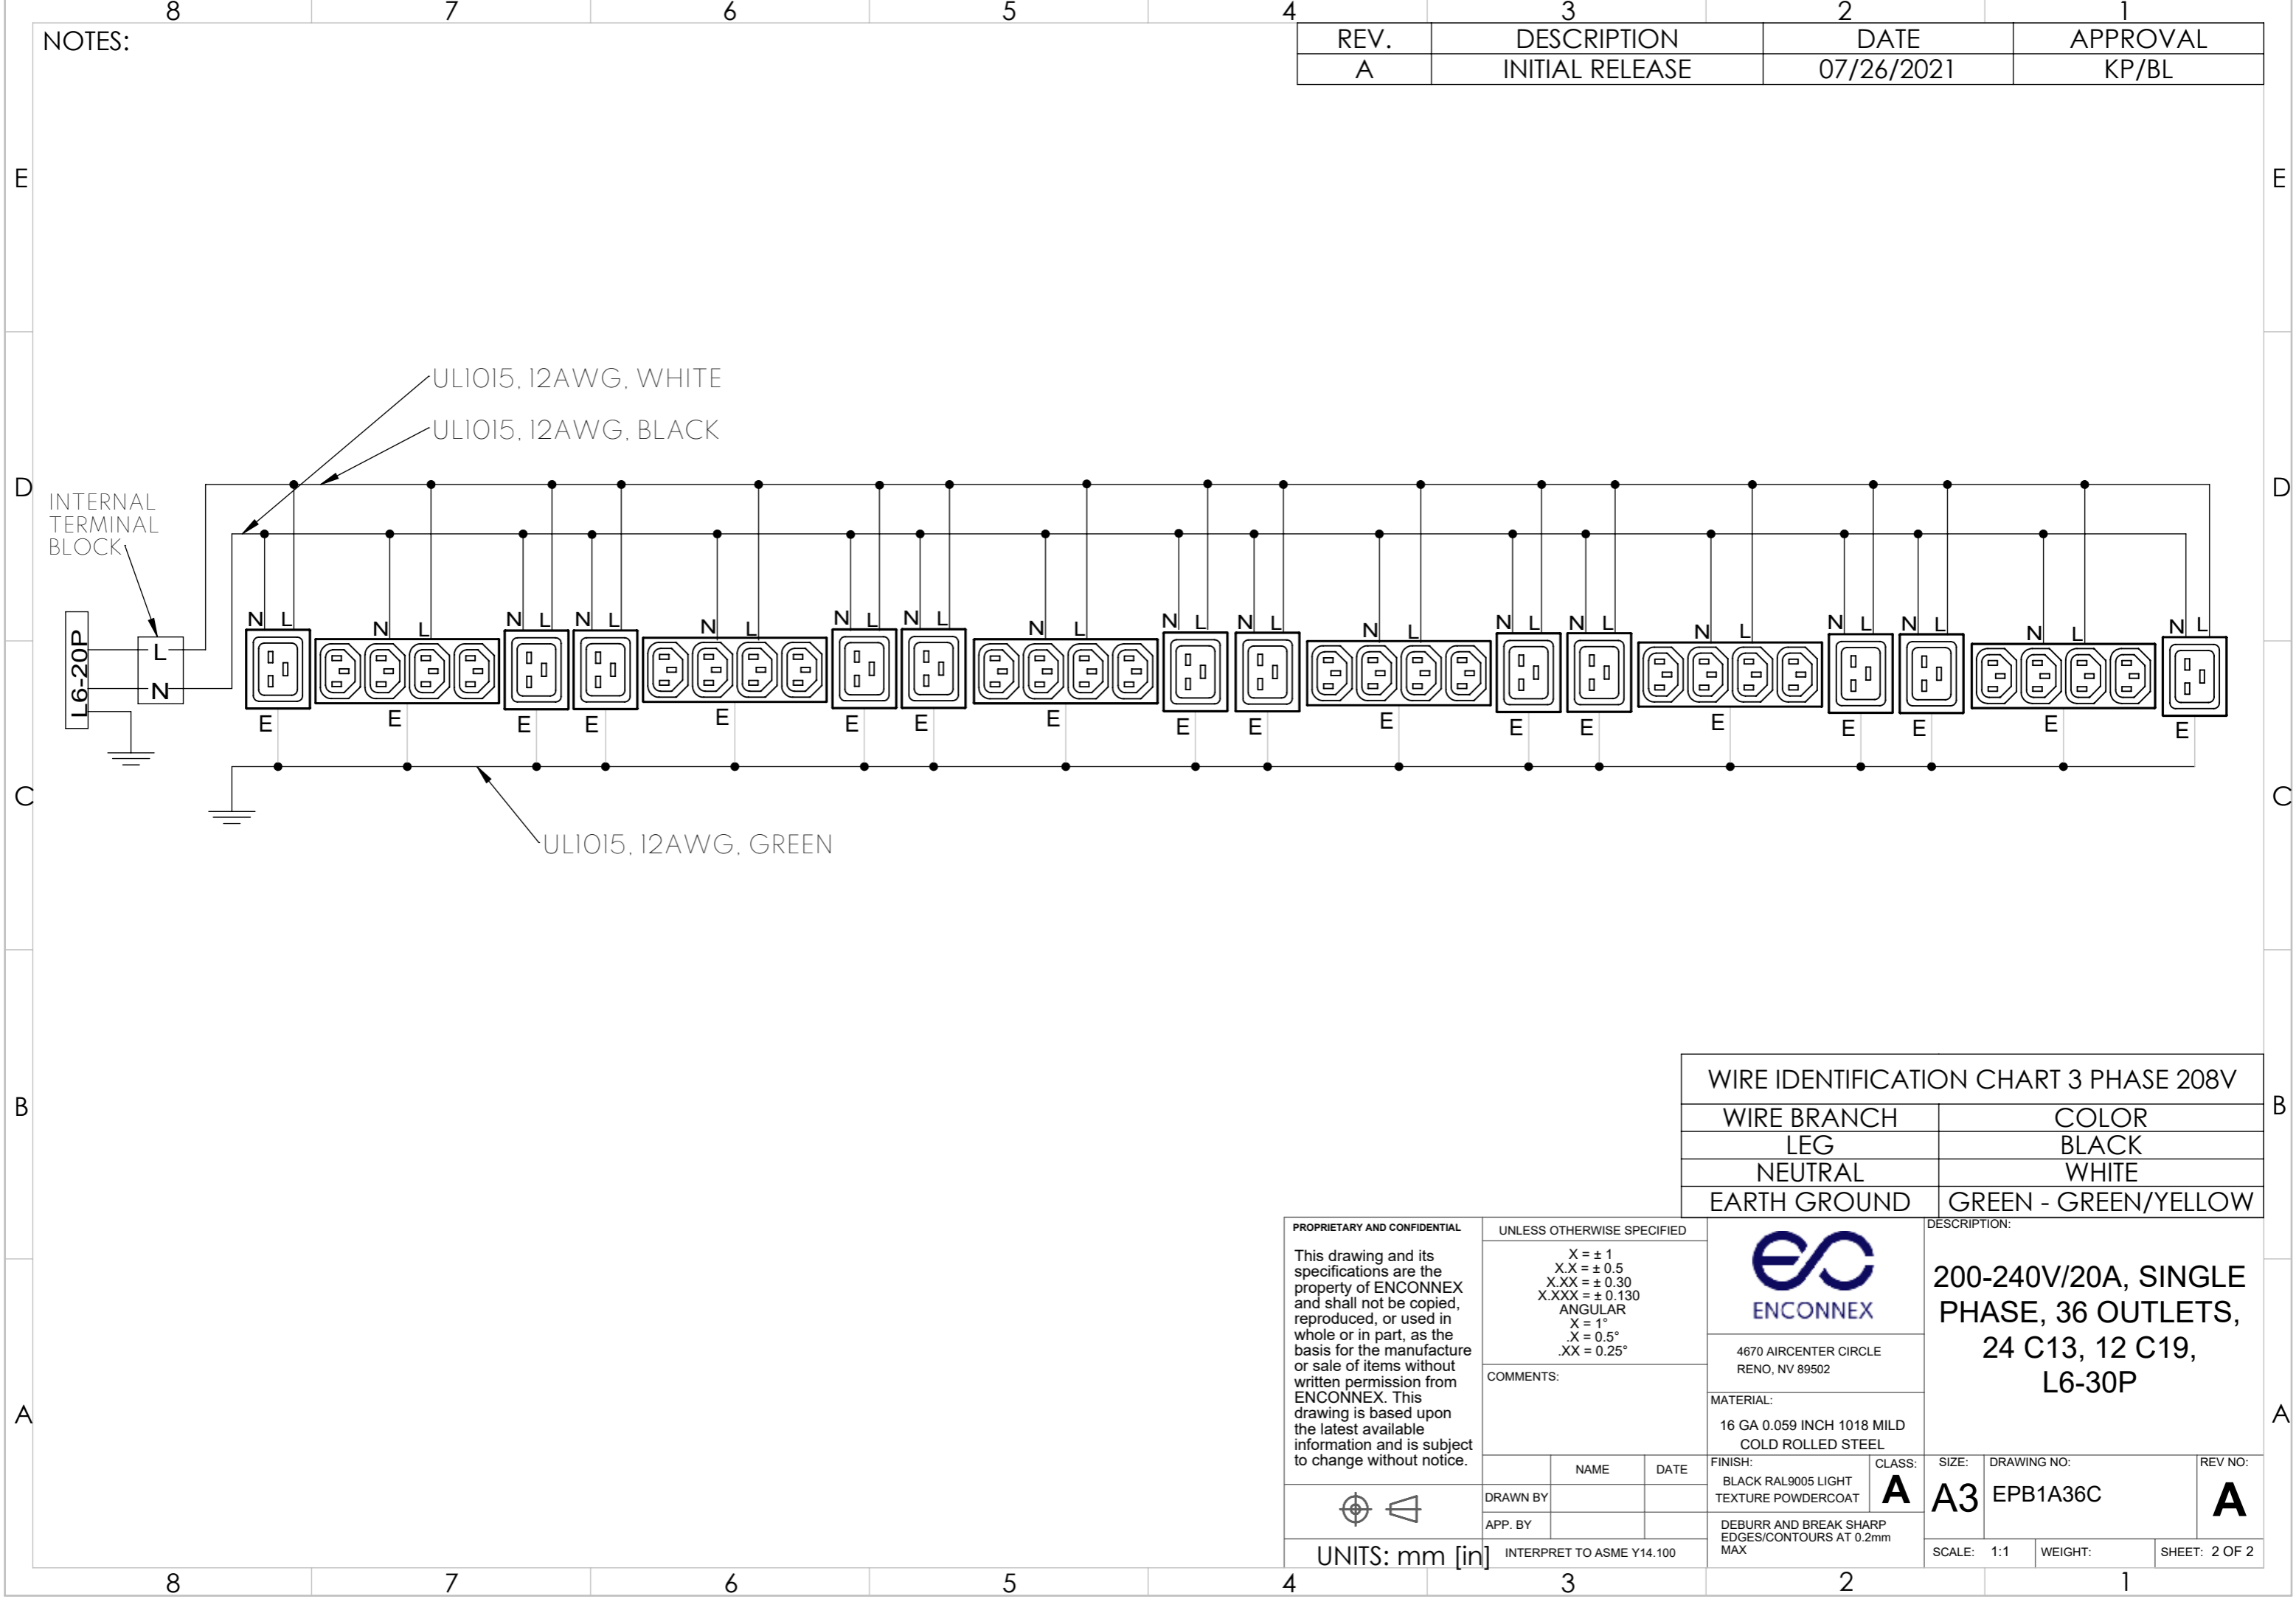

WIRE IDENTIFICATION CHART 3 PHASE 208V	
WIRE BRANCH	COLOR
LEG	BLACK
NEUTRAL	WHITE
EARTH GROUND	GREEN - GREEN/YELLOW

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.</p>	<p>UNLESS OTHERWISE SPECIFIED</p> <p>X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°</p>		 <p>4670 AIRCENTER CIRCLE RENO, NV 89502</p>	<p>DESCRIPTION:</p> <p>200-240V/20A, SINGLE PHASE, 36 OUTLETS, 24 C13, 12 C19, L6-30P</p>			
	<p>COMMENTS:</p>						<p>MATERIAL:</p> <p>16 GA 0.059 INCH 1018 MILD COLD ROLLED STEEL</p>
	<p>NAME</p>	<p>DATE</p>	<p>FINISH:</p> <p>BLACK RAL9005 LIGHT TEXTURE POWDERCOAT</p>	<p>CLASS:</p> <p>A</p>	<p>SIZE:</p> <p>A3</p>	<p>DRAWING NO:</p> <p>EPB1A36C</p>	<p>REV NO:</p> <p>A</p>
	<p>UNITS: mm [in]</p>		<p>DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX</p>	<p>SCALE: 1:1</p>	<p>WEIGHT:</p>	<p>SHEET: 2 OF 2</p>	