




NOTES:

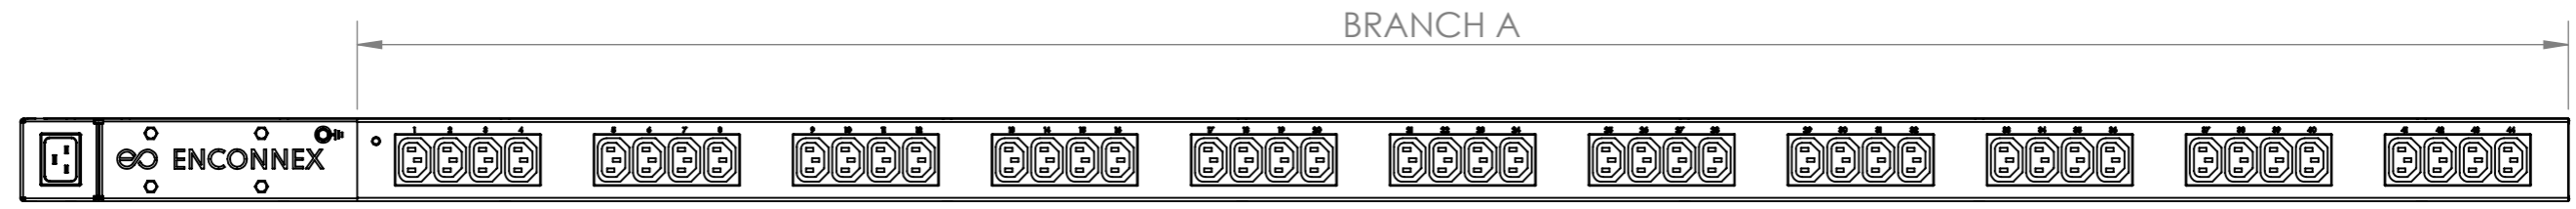


TOP VIEW

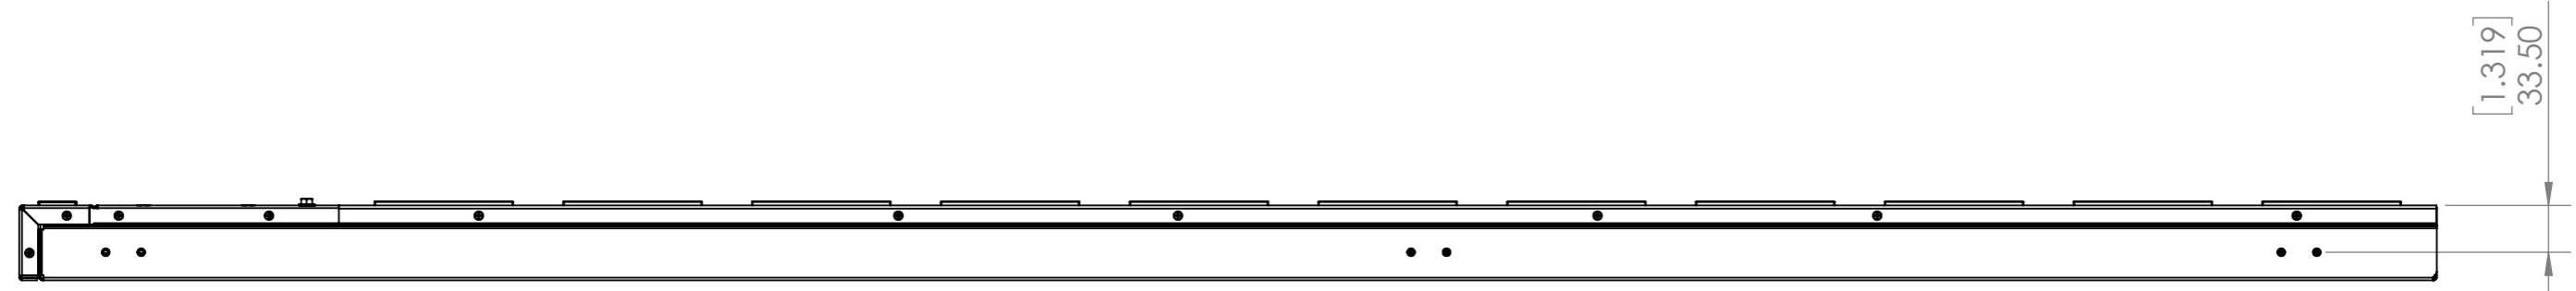


RIGHT VIEW

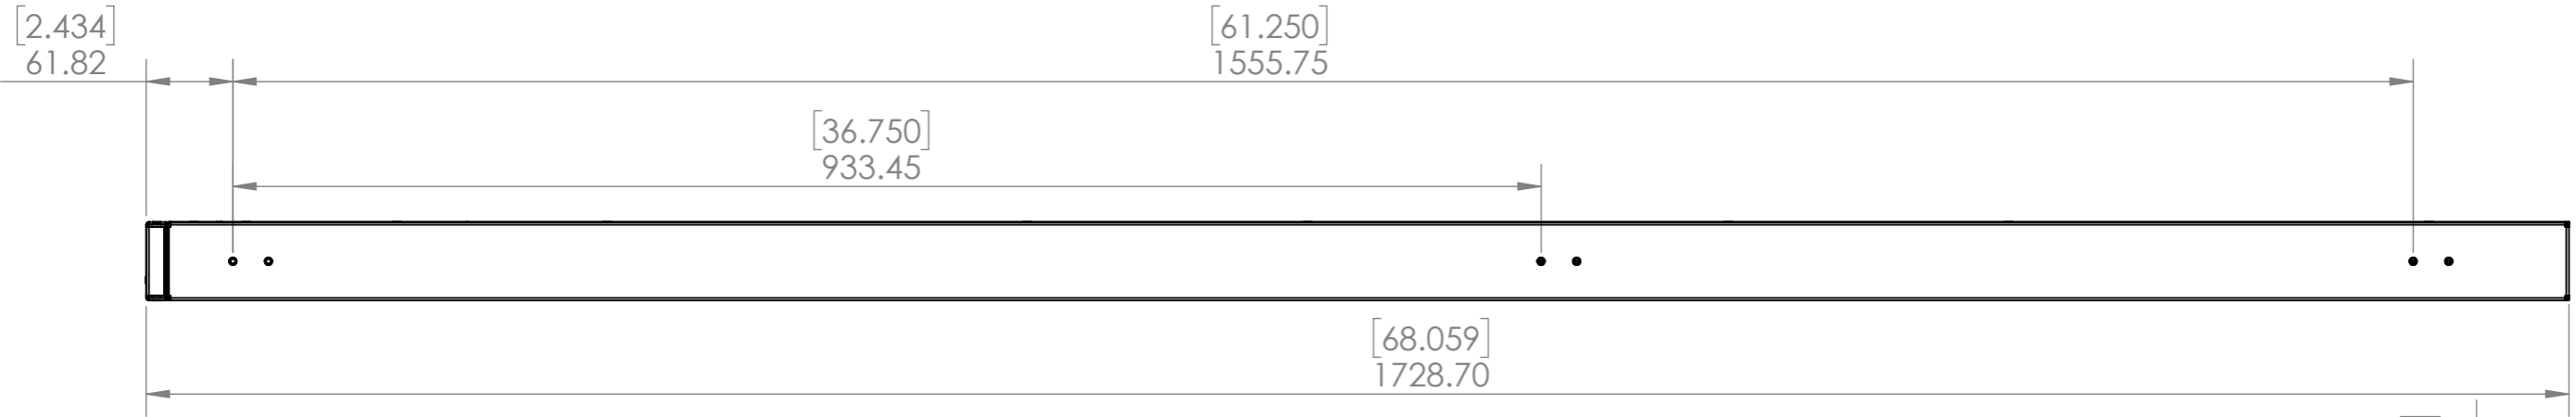

REAR VIEW

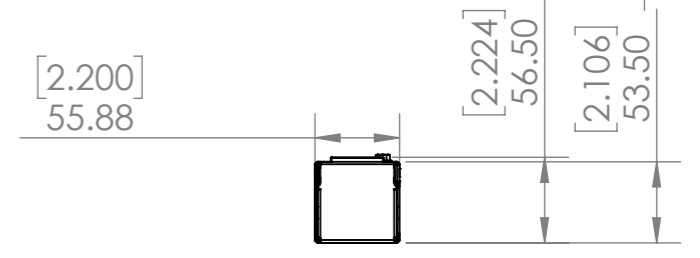

BOTTOM VIEW

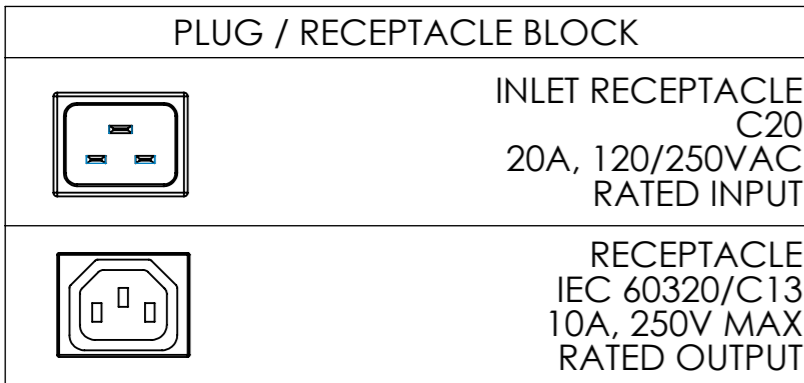


UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT CURRENT:
BREAKERS QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:

208V/16A, SINGLE
PHASE, 44 C13,
C20 INLET


UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT CURRENT:
BREAKERS QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:

208V/16A, SINGLE
PHASE, 44 C13,
C20 INLET

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.</p>	<p>UNLESS OTHERWISE SPECIFIED</p> <p>X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° X = 0.5° .XX = 0.25°</p>		 <p>4670 AIRCENTER CIRCLE RENO, NV 89502</p>	<p>DESCRIPTION:</p> <p>208V/16A, SINGLE PHASE, 44 C13, C20 INLET</p>	
	<p>COMMENTS:</p>			<p>MATERIAL:</p>	
<p>DRAWN BY:</p>	<p>NAME:</p>	<p>DATE:</p>	<p>FINISH:</p>	<p>CLASS:</p>	<p>SIZE: A3</p>
<p>APP. BY:</p>	<p>INTERPRET TO ASME Y14.100</p>		<p>DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX</p>	<p>SCALE: 1:5</p>	<p>WEIGHT:</p>
<p>UNITS: mm [in]</p>			<p>EPB1A44A</p>	<p>REV NO:</p>	<p>SHEET: 1 OF 2</p>

NOTES:

REV.	DESCRIPTION	DATE	APPROVAL
A	INITIAL RELEASE	07/26/2021	KP/BL

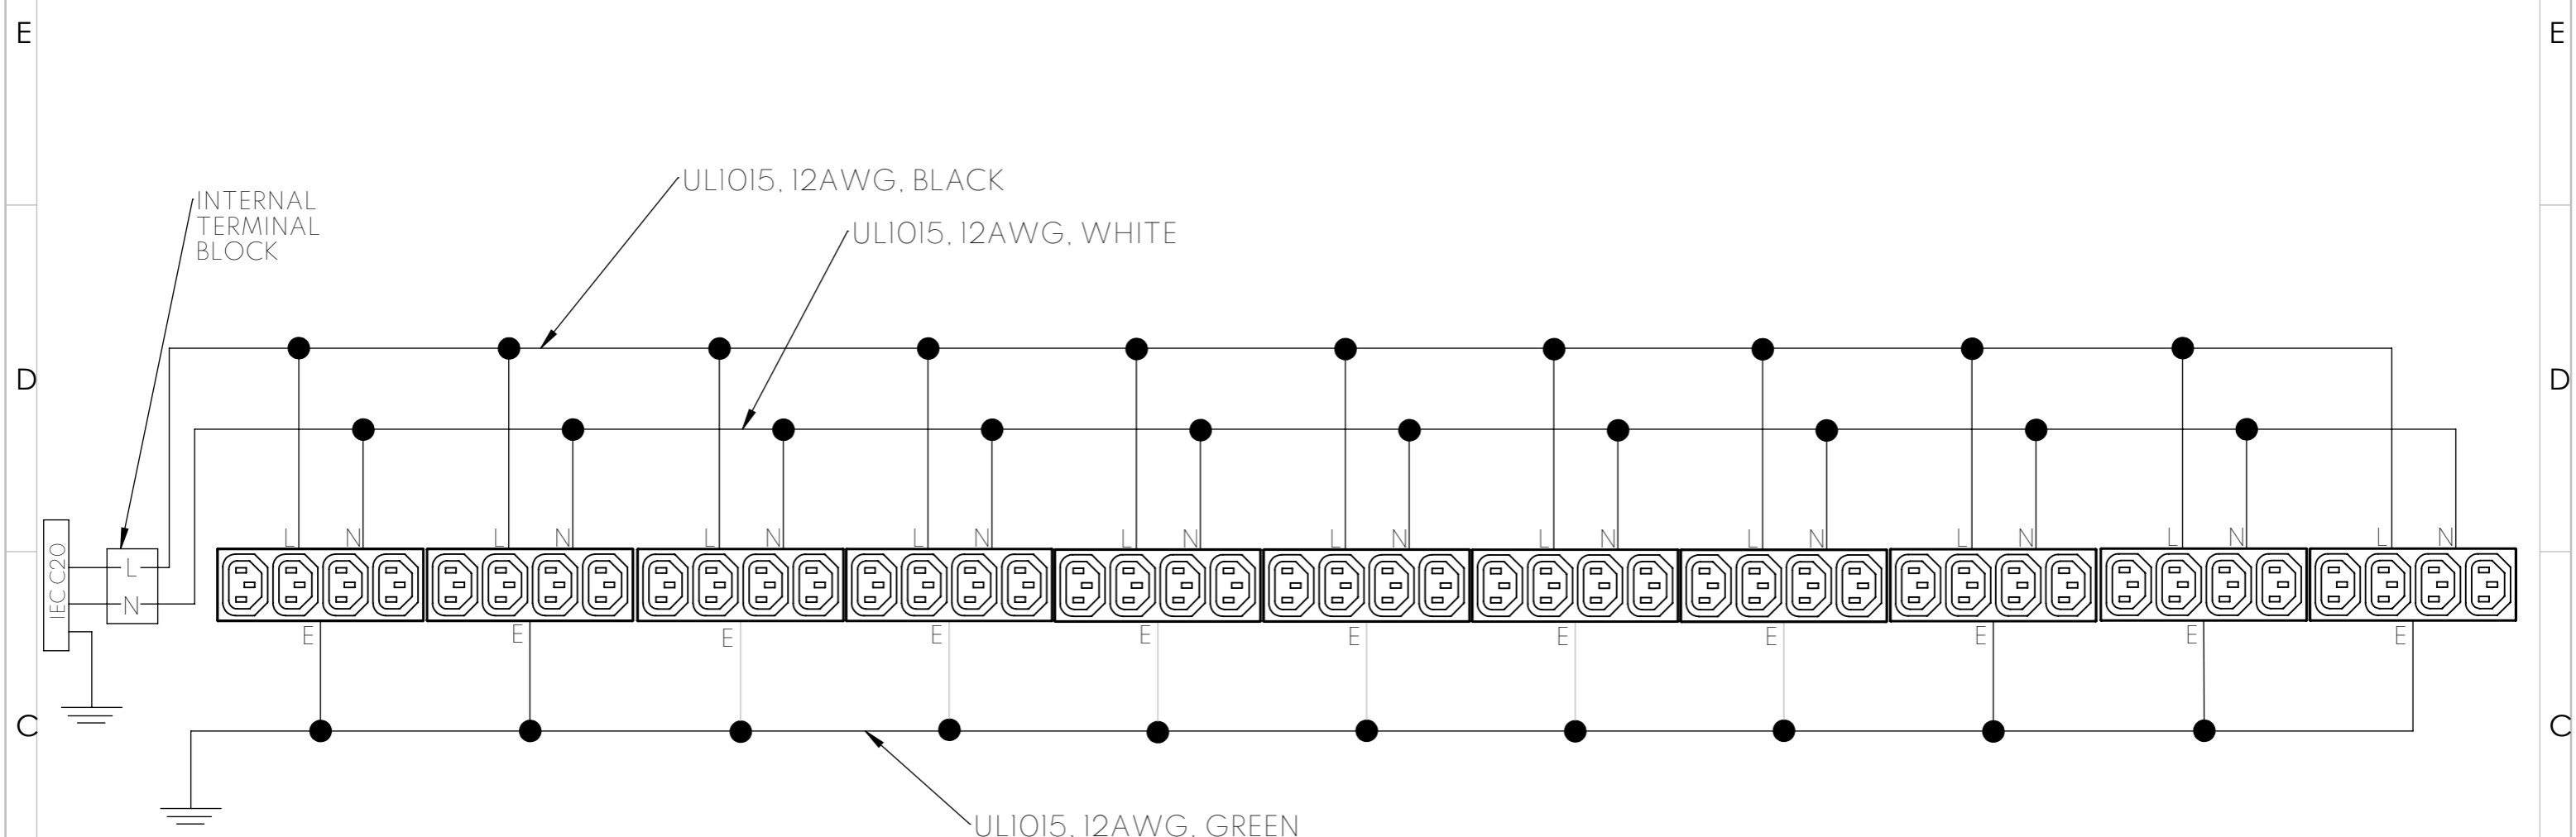

WIRE IDENTIFICATION CHART 3 PHASE 208V	
WIRE BRANCH	COLOR
LEG	BLACK
NEUTRAL	WHITE
EARTH GROUND	GREEN - GREEN/YELLOW

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.</p>	<p>UNLESS OTHERWISE SPECIFIED</p> <p>X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130</p> <p>ANGULAR X = 1° .X = 0.5° .XX = 0.25°</p>		<p>4670 AIRCENTER CIRCLE RENO, NV 89502</p>	<p>DESCRIPTION:</p> <p>120V/16A, SINGLE PHASE, 44 OUTLETS, 44 C13, C20 INLET</p>					
	COMMENTS:			MATERIAL:	FINISH:	CLASS: A	SIZE: A3	DRAWING NO: EPB1A44A	REV NO: A
			DRAWN BY:	APP. BY:	<p>DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX</p>		SCALE: 1:1	WEIGHT:	SHEET: 2 OF 2
	<p>UNITS: mm [in]</p>		<p>INTERPRET TO ASME Y14.100</p>						