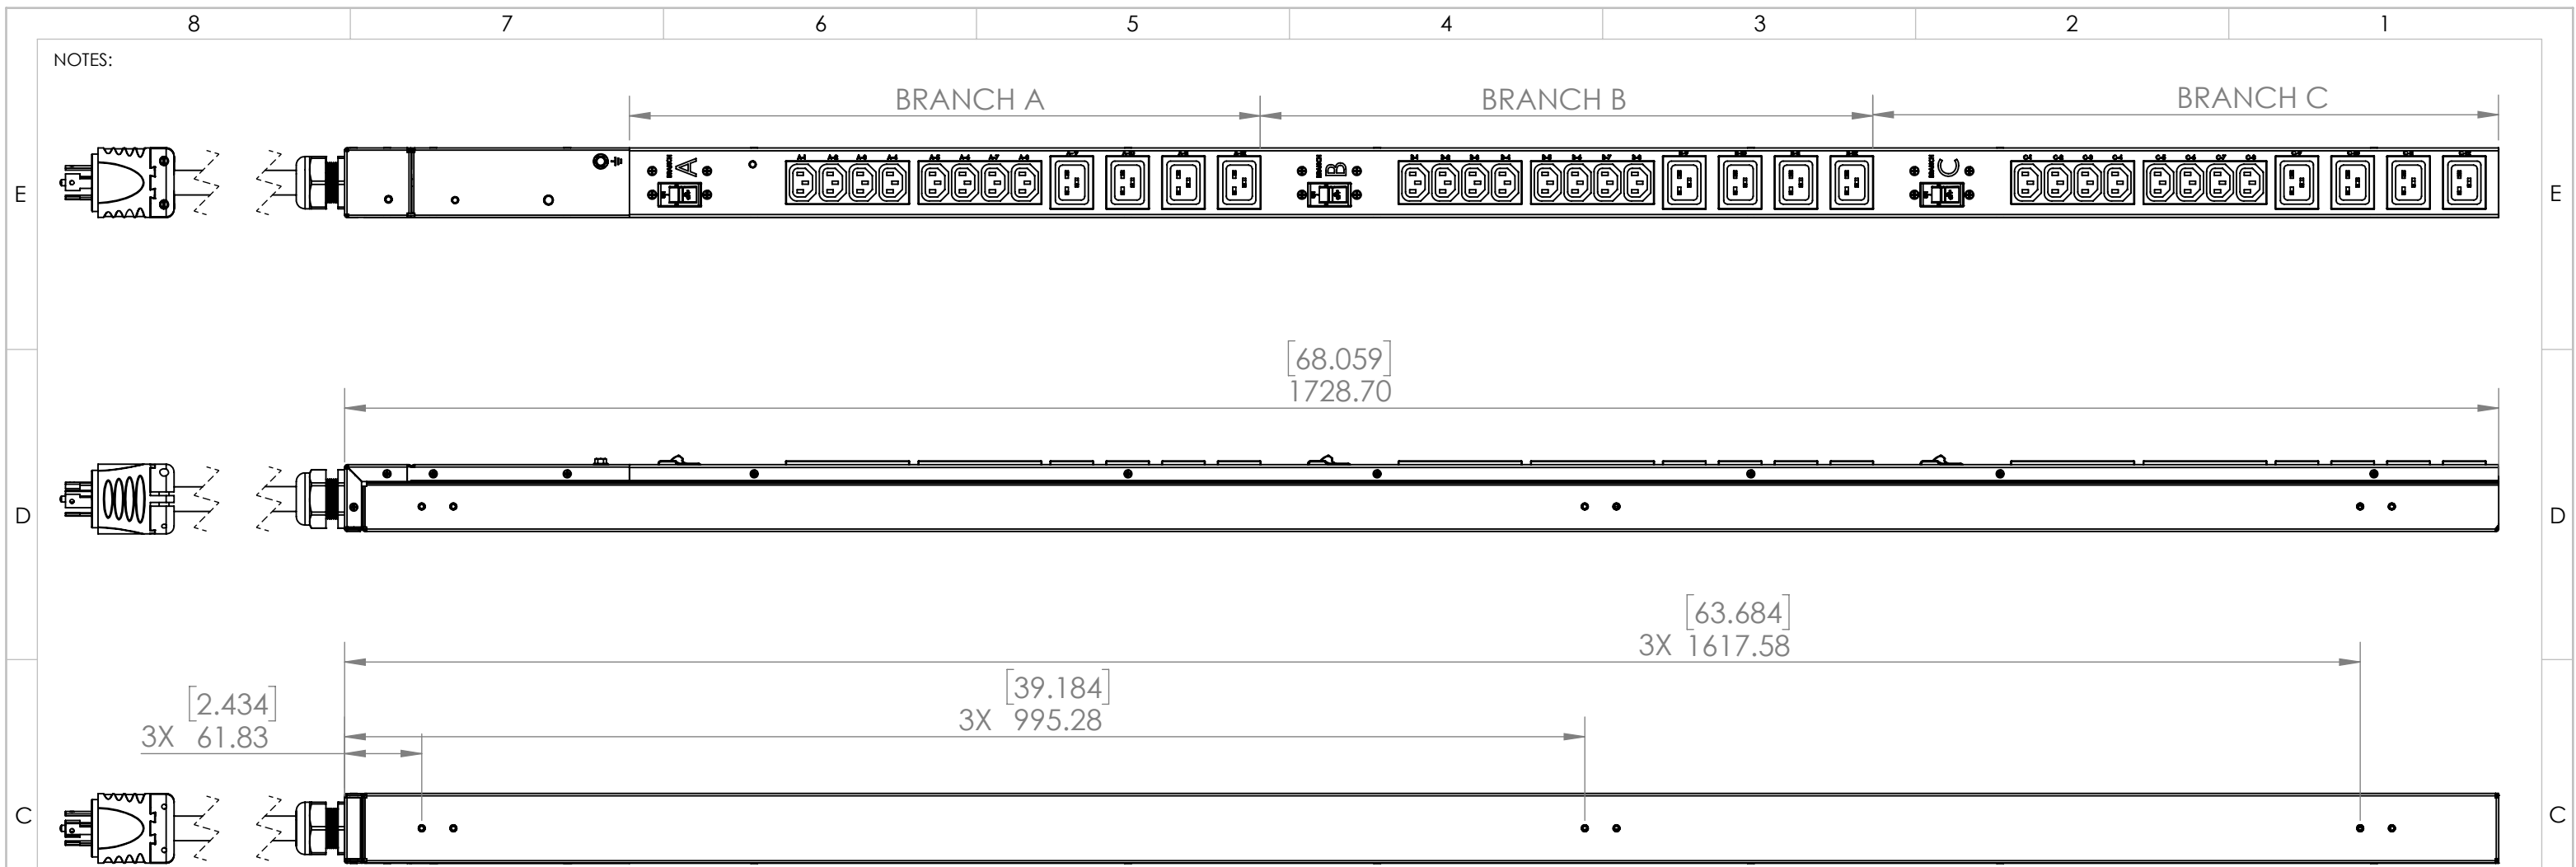


NOTES:



[2.434]  
3X 61.83

[39.184]  
3X 995.28




[68.059]  
1728.70

[63.684]  
3X 1617.58

[2.200]  
55.88

[2.106]  
53.50

[2.224]  
56.50

PLUG/RECEPTACLE BLOCK	
	PLUG NEMA L15-30P 24A, 240VAC
	RECEPTACLE IEC 60320/C13 10A, 250V MAX RATED OUTPUT
	RECEPTACLE IEC60320/C19 16A, 250V MAX RATED OUTPUT

GENERAL INFORMATION	
UNIT TYPE	BASIC PDU
ORIENTATION	VERTICAL 0U FULL
OUTLET QTY & TYPE	[24] C13, [12] C19
INPUT VOLTAGE	240VAC
INPUT CURRENT	24A
BREAKERS QTY & TYPE	[3] DUAL POLE HYDRAULIC MAGNETIC
INPUT PHASE	THREE PHASE DELTA
INPUT POWER	8.6kVA
INPUT PLUG	L15-30P
INPUT POWER CORD	3m [10'] END FEED
COMPLIANCE	CSA

PROPRIETARY AND CONFIDENTIAL

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

UNLESS OTHERWISE SPECIFIED

X = ± 1  
X.X = ± 0.5  
X.XX = ± 0.30  
X.XXX = ± 0.130  
ANGULAR  
X = 1°  
.X = 0.5°  
.XX = 0.25°

COMMENTS:

NAME	DATE
DRAWN BY	
APP. BY	



4670 AIRCENTER CIRCLE  
RENO, NV 89502

MATERIAL:

FINISH: CLASS:  
DEBURR AND BREAK SHARP  
EDGES/CONTOURS AT 0.2mm  
MAX

DESCRIPTION:

208V/30A, THREE  
PHASE DELTA, 36  
OUTLETS, 24 C13, 12  
C19, BASIC 22KAIC  
BREAKER, L15-30

SIZE:	DRAWING NO:	REV NO:
B	<b>EPB1G36C</b>	<b>1</b>

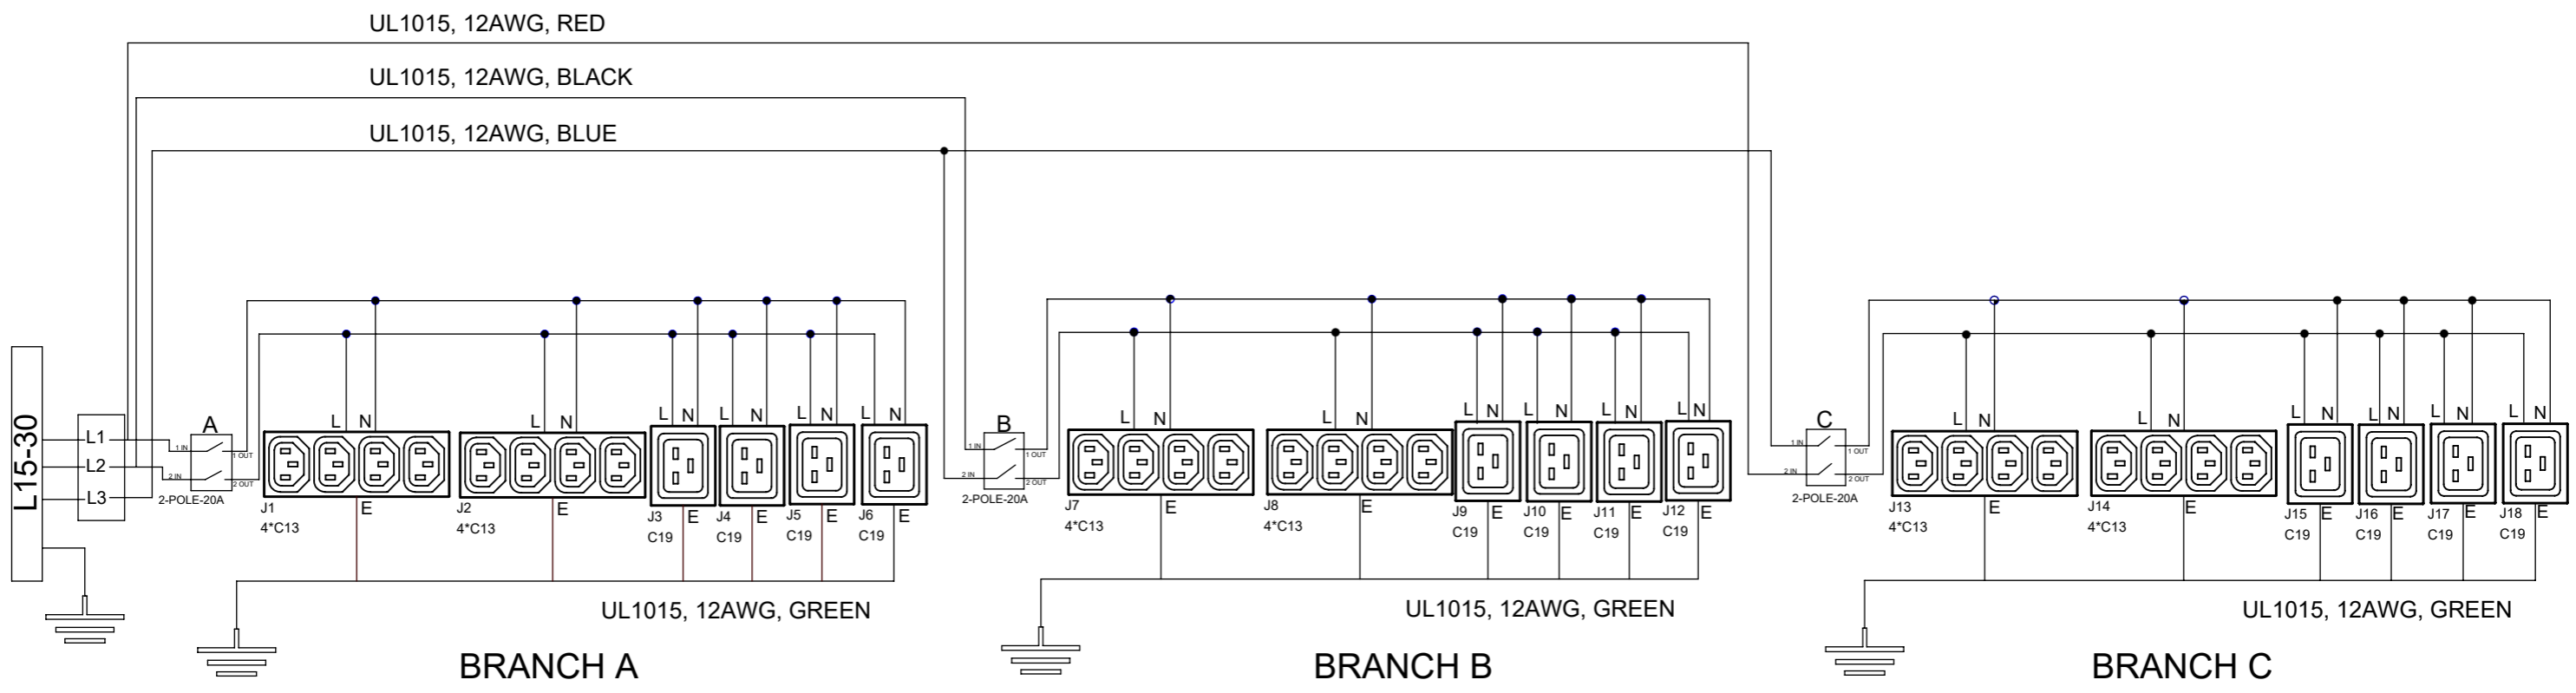
UNITS: mm [in]

INTERPRET TO ASME Y14.100

SCALE: 1:5 WEIGHT: SHEET: 1 OF 2

NOTES:

REV.	DESCRIPTION	DATE	APPROVAL
1	INITIAL RELEASE	08/05/2021	KP/BL



WIRE BRANCH	COLOR
LEG 1	BLACK
LEG 2	RED
LEG 3	BLUE OR ORANGE
EARTH GROUND	GREEN - GREEN/YELLOW

<p><b>PROPRIETARY AND CONFIDENTIAL</b></p> <p>This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.</p>	<p>UNLESS OTHERWISE SPECIFIED</p> <p>X = ± 1  X.X = ± 0.5  X.XX = ± 0.30  X.XXX = ± 0.130</p> <p>ANGULAR  X = 1°  .X = 0.5°  .XX = 0.25°</p>	<p>4670 AIRCENTER CIRCLE  RENO, NV 89502</p>	<p>DESCRIPTION:</p> <p><b>208V/30A, THREE PHASE DELTA, 36 OUTLETS, 24 C13, 12 C19, 3 22kAIC BREAKER L15-30P</b></p>							
	<p>COMMENTS:</p>			<p>MATERIAL:</p> <p>16 GA 0.059 INCH 1018 MILD COLD ROLLED STEEL</p>						
<p>FINISH:</p> <p>BLACK RAL9005 LIGHT TEXTURE POWDERCOAT</p>	<table border="1"> <thead> <tr> <th>NAME</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> </tr> </tbody> </table>	NAME	DATE			<p>CLASS: <b>A</b></p>	<table border="1"> <tr> <td>SIZE: <b>A3</b></td> <td>DRAWING NO: <b>EPB1G36C</b></td> <td>REV NO: <b>1</b></td> </tr> </table>	SIZE: <b>A3</b>	DRAWING NO: <b>EPB1G36C</b>	REV NO: <b>1</b>
NAME	DATE									
SIZE: <b>A3</b>	DRAWING NO: <b>EPB1G36C</b>	REV NO: <b>1</b>								
<p>UNITS: mm [in]</p>	<p>INTERPRET TO ASME Y14.100</p>	<p>DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX</p>	<table border="1"> <tr> <td>SCALE: 1:8</td> <td>WEIGHT:</td> <td>SHEET: 2 OF 2</td> </tr> </table>	SCALE: 1:8	WEIGHT:	SHEET: 2 OF 2				
SCALE: 1:8	WEIGHT:	SHEET: 2 OF 2								