




NOTES:

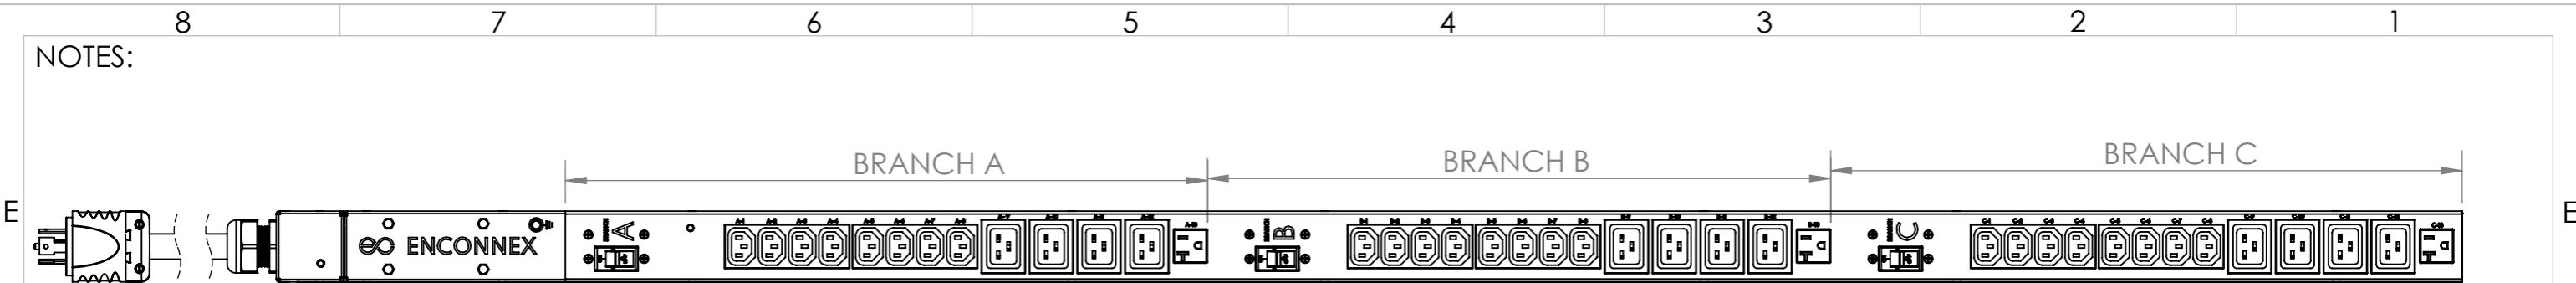


TOP VIEW

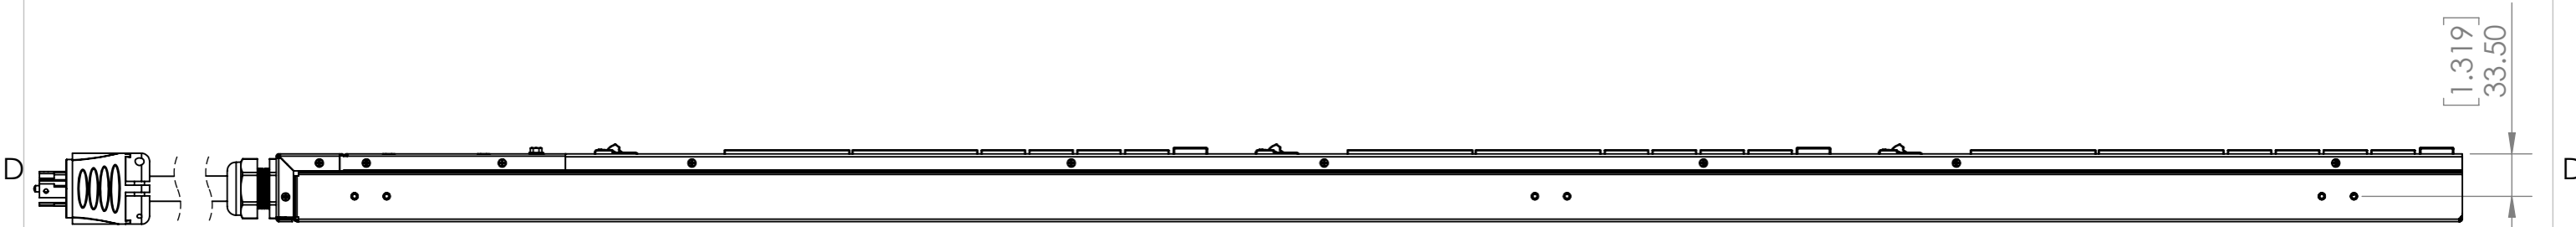





RIGHT VIEW

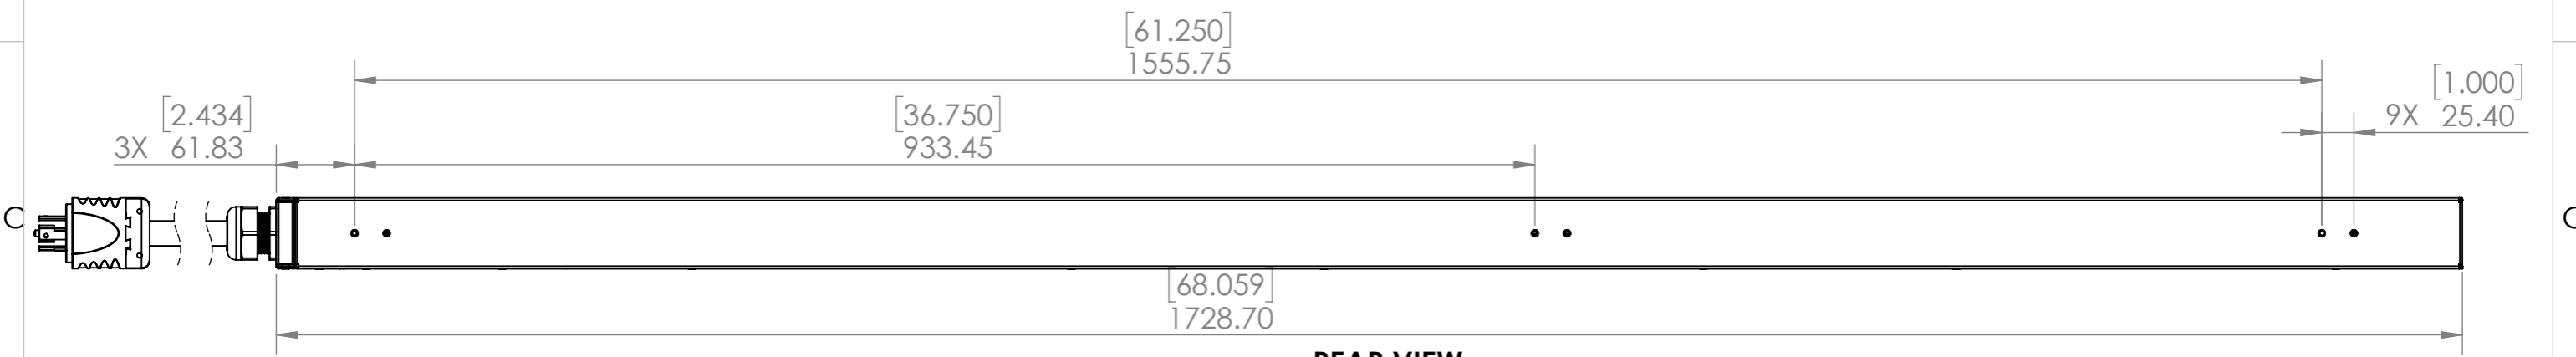


REAR VIEW

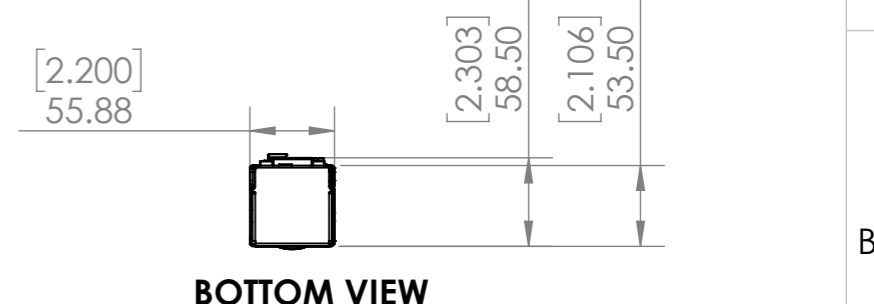

BOTTOM VIEW

PLUG/ RECEPTACLE BLOCK	
	PLUG NEMA L21-30, 4P-5W 30A, 120/240VAC
	RECEPTACLE IEC 60320/C13 10A, 250V MAX RATED OUTPUT
	RECEPTACLE IEC 60320/C19 16A, 250V MAX RATED OUTPUT
	RECEPTACLE NEMA 5-15/20R 20A, 240V MAX RATED OUTPUT


UNIT TYPE: BASIC INPUT  
 ORIENTATION: VERTICAL, 0U FULL  
 OUTLET QTY & TYPE: (24) C13, (12) C19, (3) NEMA 5-15/20R  
 INPUT VOLTAGE: 120/240VAC  
 INPUT CURRENT: 24A  
 BRAKER QTY & TYPE: (3) DUAL POLE HYDRAULIC MAGNETIC  
 INPUT PHASE: THREE PHASE WYE  
 RATED POWER: 5.760kVA  
 INPUT PLUG: L21-30  
 INPUT POWER CORD: 3m (10') TOP FEED  
 REGULATORY STANDARD: CSA COMPLIANCE

<b>PROPRIETARY AND CONFIDENTIAL</b> This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.	UNLESS OTHERWISE SPECIFIED X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° X = 0.5° .XX = 0.25°	 4670 AIRCENTER CIRCLE RENO, NV 89502	DESCRIPTION: <b>208V/30A, THREE PHASE, 39 OUTLETS,          24 C13, 12 C19,          3 NEMA N5-15/20          L21-30P</b>			
	COMMENTS:		MATERIAL:	FINISH:	CLASS:	SIZE:
DRAWN BY:	NAME:	DATE:	DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX	SCALE: 1:5	DRAWING NO: EPB1K39K	REV NO:
APP. BY:	INTERPRET TO ASME Y14.100		WEIGHT:	SHEET: 1 OF 2		

UNITS: mm [in]

NOTES:

REV.	DESCRIPTION	DATE	APPROVAL
A	INITIAL RELEASE	07/30/2021	KP/BL

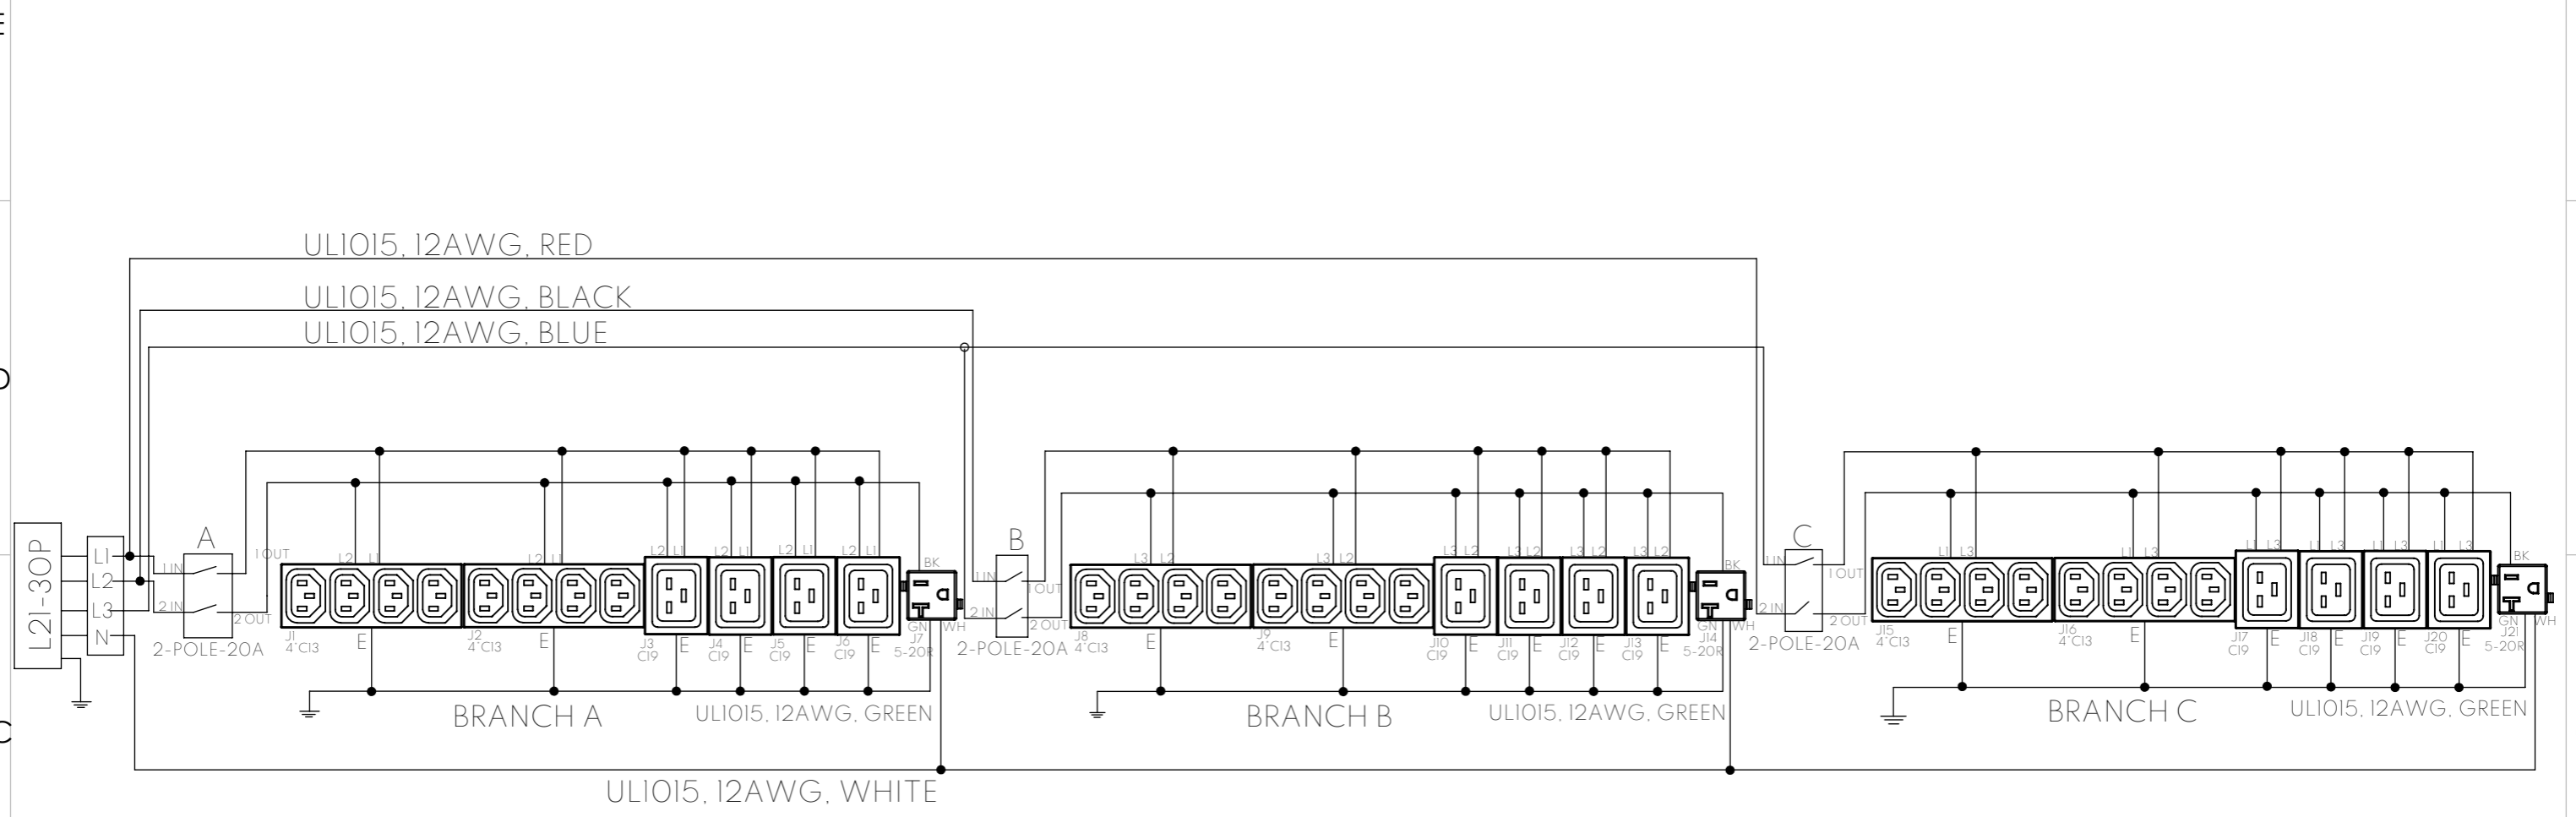

WIRE IDENTIFICATION CHART 3 PHASE 208V	
WIRE BRANCH	COLOR
LEG 1	BLACK
LEG 2	RED
LEG 3	BLUE OR ORANGE
NEUTRAL	WHITE
EARTH GROUND	GREEN - GREEN/YELLOW

<p><b>PROPRIETARY AND CONFIDENTIAL</b></p> <p>This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.</p>	<p>UNLESS OTHERWISE SPECIFIED</p> <p>X = ± 1  X.X = ± 0.5  X.XX = ± 0.30  X.XXX = ± 0.130</p> <p>ANGULAR  X = 1°  X = 0.5°  .XX = 0.25°</p>	<p>4670 AIRCENTER CIRCLE  RENO, NV 89502</p>	<p>DESCRIPTION:</p> <p><b>208V/30A, THREE PHASE, 39 OUTLETS, 24 C13, 12 C19, 3 NEMA N5-15/20 L21-30P</b></p>				
			<p>COMMENTS:</p>		<p>MATERIAL:</p>		<p>FINISH:</p>
<p>CLASS: <b>A</b></p>		<p>SIZE: <b>A3</b></p>		<p>DRAWING NO: <b>EPB1K39K</b></p>		<p>REV NO: <b>A</b></p>	
<p>DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX</p>		<p>SCALE: 2:1</p>		<p>WEIGHT:</p>		<p>SHEET: 2 OF 2</p>	

UNITS: mm [in]

INTERPRET TO ASME Y14.100