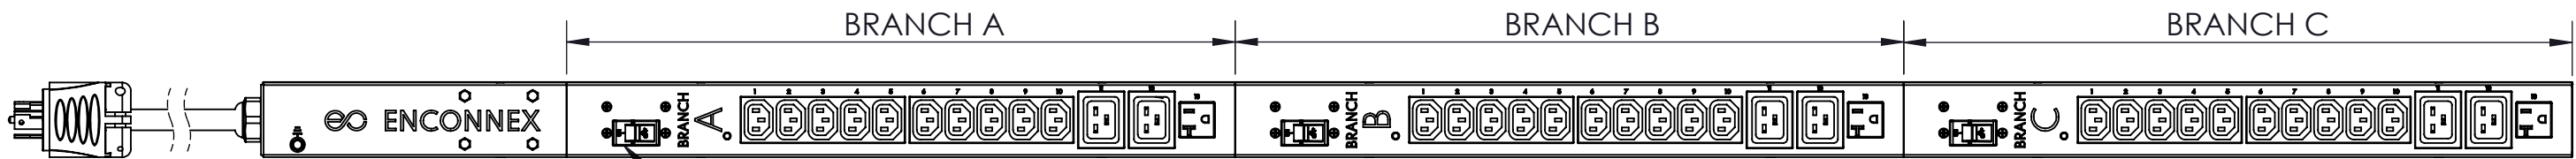



Notes/Instructions:

REV.	DATE	DESCRIPTION	APPROVAL

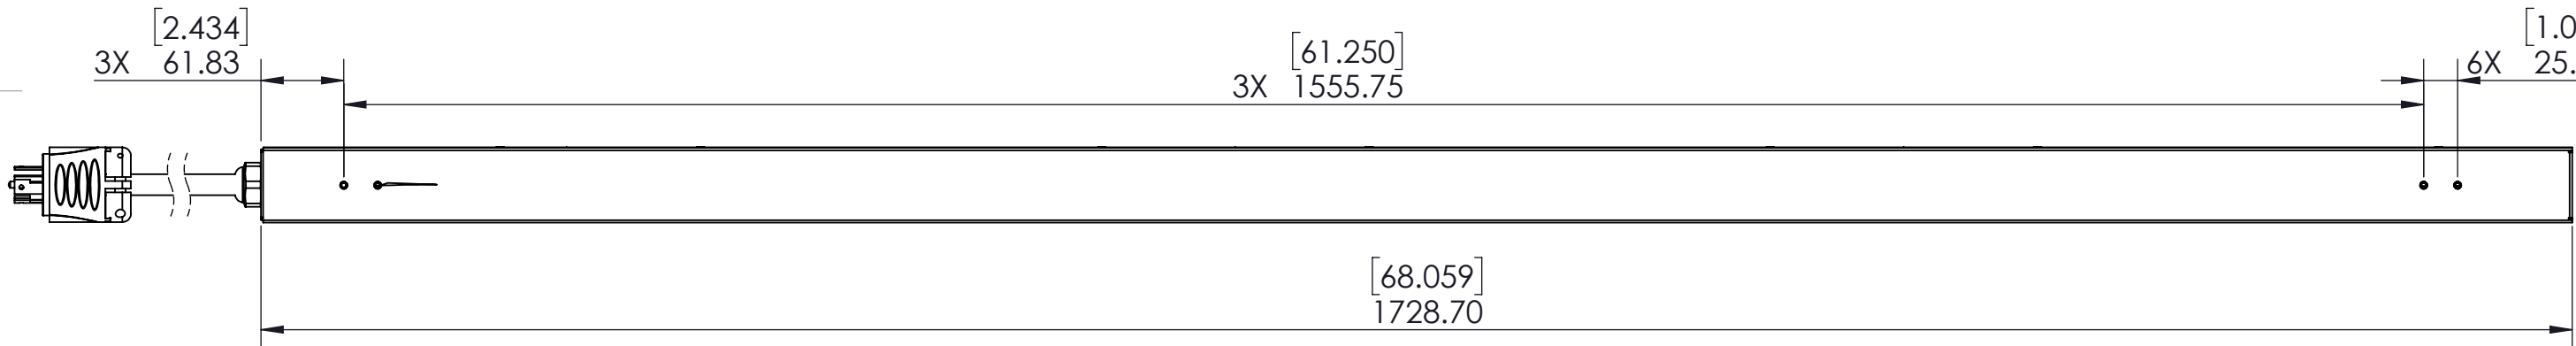


TOP VIEW





20 AMP, DOUBLE POLE
HYDRAULIC MAGNETIC BREAKER
(3) PLACES, 22KA

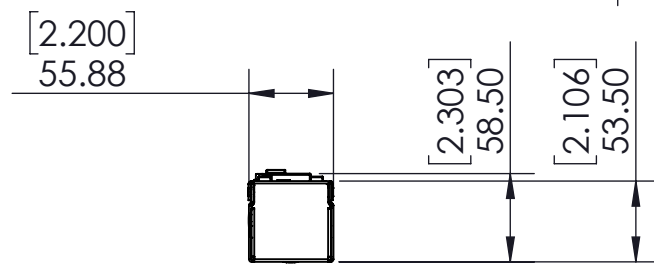


RIGHT VIEW



REAR VIEW



PLUG/RECEPTACLE BLOCK			
	PLUG NEMA L21-30P, 4P-5W 30A, 120/208VAC		RECEPTACLE IEC 60320/C19 16A, 250V MAX RATED OUTPUT
	RECEPTACLE NEMA 5-15/20R 20A, 120V MAX RATED		RECEPTACLE IEC 60320/C13 10A, 250V MAX RATED OUTPUT



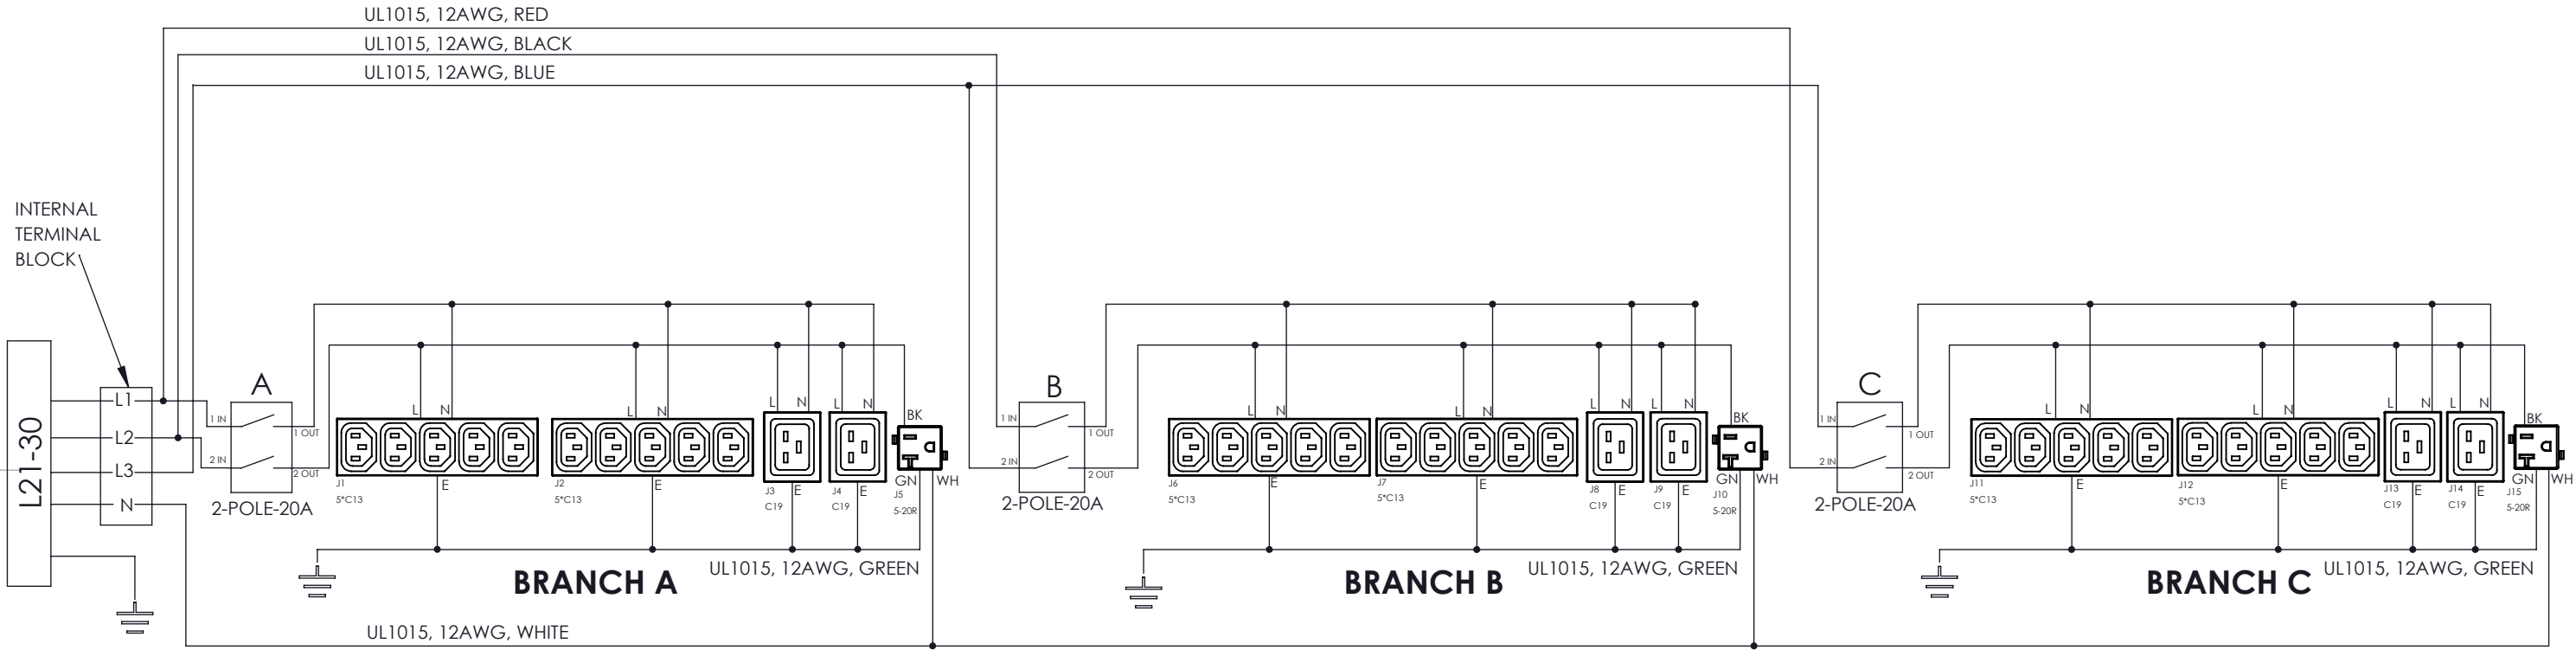
BOTTOM VIEW

Notes:
This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

UNIT TYPE: BASIC INPUT
ORIENTATION: VERTICAL, 0U FULL
OUTLET QTY&TYPE: (30) C13, (6) C19, (3) NEMA 5-15/20R
INPUT VOLTAGE: 208VAC
INPUT CURRENT: 30A
BREAKER QTY& TYPE: (3) 20AMP, DOUBLE POLE, 22KA
INPUT PHASE: THREE-PHASE DELTA
RATED POWER: 7.2kVA
INPUT PLUG: NEMA L21-30
INPUT POWER CORD: 3m(10'), TOP FEED
REGULATORY STANDARD: AWAITING APPROVAL



TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° X = 0.5° XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE RENO, NV 89502	PART NUMBER: EPB1K39L
	FINISH		DESCRIPTION: 208V/30A, THREE PHASE DELTA, 39 OUTLETS, 30 C13, 6 C19, 3 NEMA 5/15/20R, BASIC, 22KAIC BREAKER, L21-30
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY:	ORG DATE:
UNITS: mm [in]	INTERPRET TO ASME Y14.100	APPROVED BY:	REV DATE:

Notes/Instructions:



Notes:
 This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

WIRE IDENTIFICATION CHART 3 PHASE 208V	
WIRE BRANCH	COLOR
LEG 1	BLACK
LEG 2	RED
LEG 3	BLUE OR ORANGE
NEUTRAL	WHITE
EARTH GROUND	GREEN - GREEN/YELLOW

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE RENO, NV 89502	PART NUMBER: ECX-BV1730060-GT
	FINISH:		DESCRIPTION: 208V/30A, THREE PHASE DELTA, 39 OUTLETS, 30 C13, 6 C19, 3 NEMA 5/15/20R, BASIC, 22kAIC BREAKER, L21-30
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY:	ORG DATE:	
UNITS: mm [in] INTERPRET TO ASME Y14.100	APPROVED BY:	REV DATE:	
SIZE: B	SCALE: 1:4	SHEET: 2/2	REV: