




NOTES:

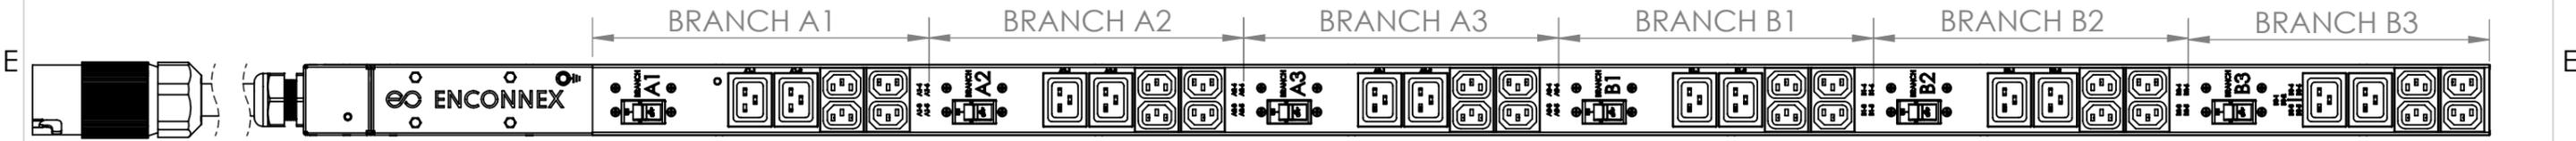


TOP VIEW

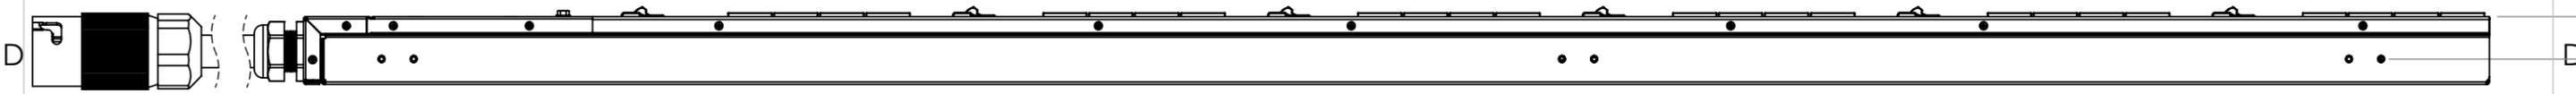



RIGHT VIEW

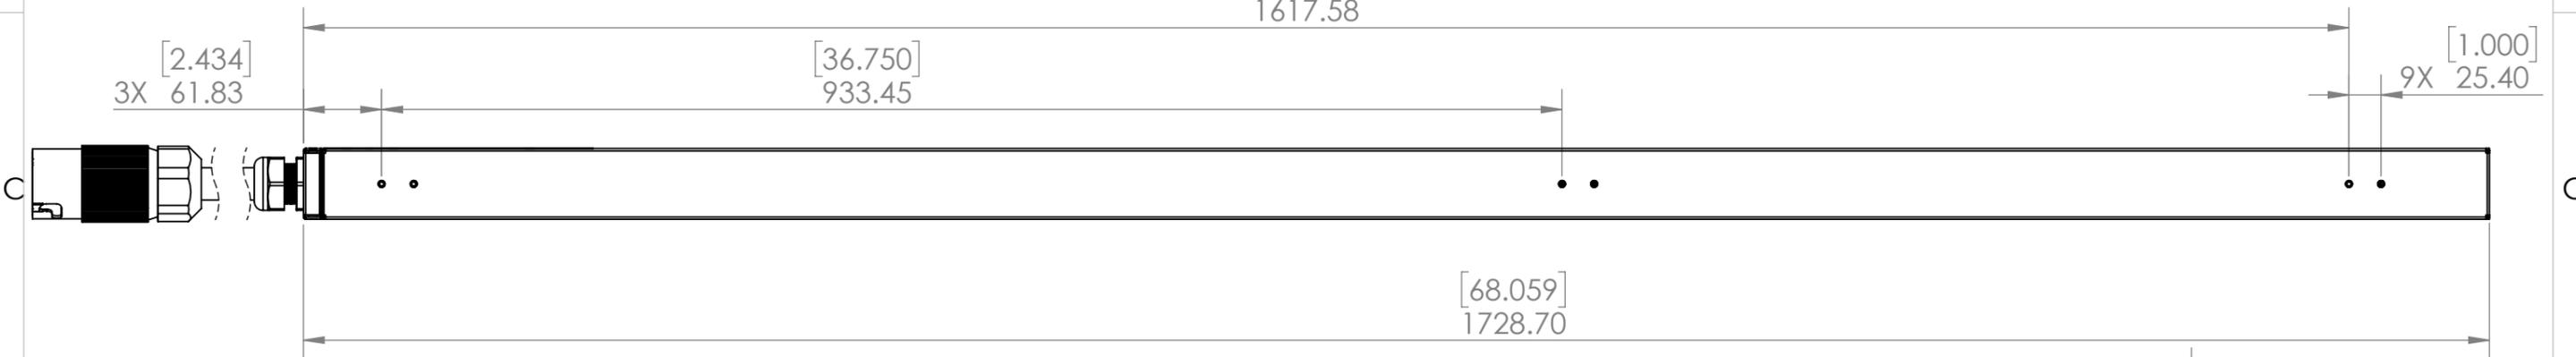

REAR VIEW

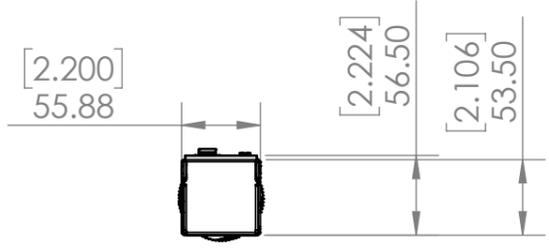

BOTTOM VIEW

PLUG/ RECEPTACLE BLOCK	
	PLUG CS8365C, 3P-4W 50A 120/240VAC
	RECEPTACLE IEC60320/C13 10A, 250V MAX RATED OUTPUT
	RECEPTACLE IEC60320/C19 16A, 250V MAX RATED POWER

UNIT TYPE:  
 ORENTATION: VERTICAL, 0U FULL  
 OUTLET QTY & TYPE: (24) C13, (12) C19  
 INPUT VOLTAGE: 120/240VAC  
 INPUT CURRENT: 40A  
 BREAKER QTY & TYPE: (6) DUAL POLE HYDRAULIC MAGNETIC  
 INPUT PHASE: THREE PHASE DELTA  
 RATED POWER: 9.600kVA  
 INPUT PLUG: CS8365C  
 INPUT POWER CORD: 3m (10') TOP FEED  
 REGUARTORY STANDARD: CSA COMPLIANCE

<b>PROPRIETARY AND CONFIDENTIAL</b> This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.	UNLESS OTHERWISE SPECIFIED X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	 4670 AIRCENTER CIRCLE RENO, NV 89502	DESCRIPTION: <b>208V/50A, THREE PHASE DELTA, 36 OUTLETS, 24 C13, 12 C19, CS8365C</b>			
	COMMENTS:		MATERIAL:	FINISH:	CLASS:	SIZE: <b>A3</b>
DRAWN BY:	NAME:	DATE:	DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX	SCALE: 1:5	WEIGHT:	SHEET: 1 OF 2
APP. BY:	UNITS: mm [in] INTERPRET TO ASME Y14.100					

NOTES:

REV.	DESCRIPTION	DATE	APPROVAL
A	INITIAL RELEASE	08/04/2021	KP/BL

E

E

D

D

C


C

B

B

A

A

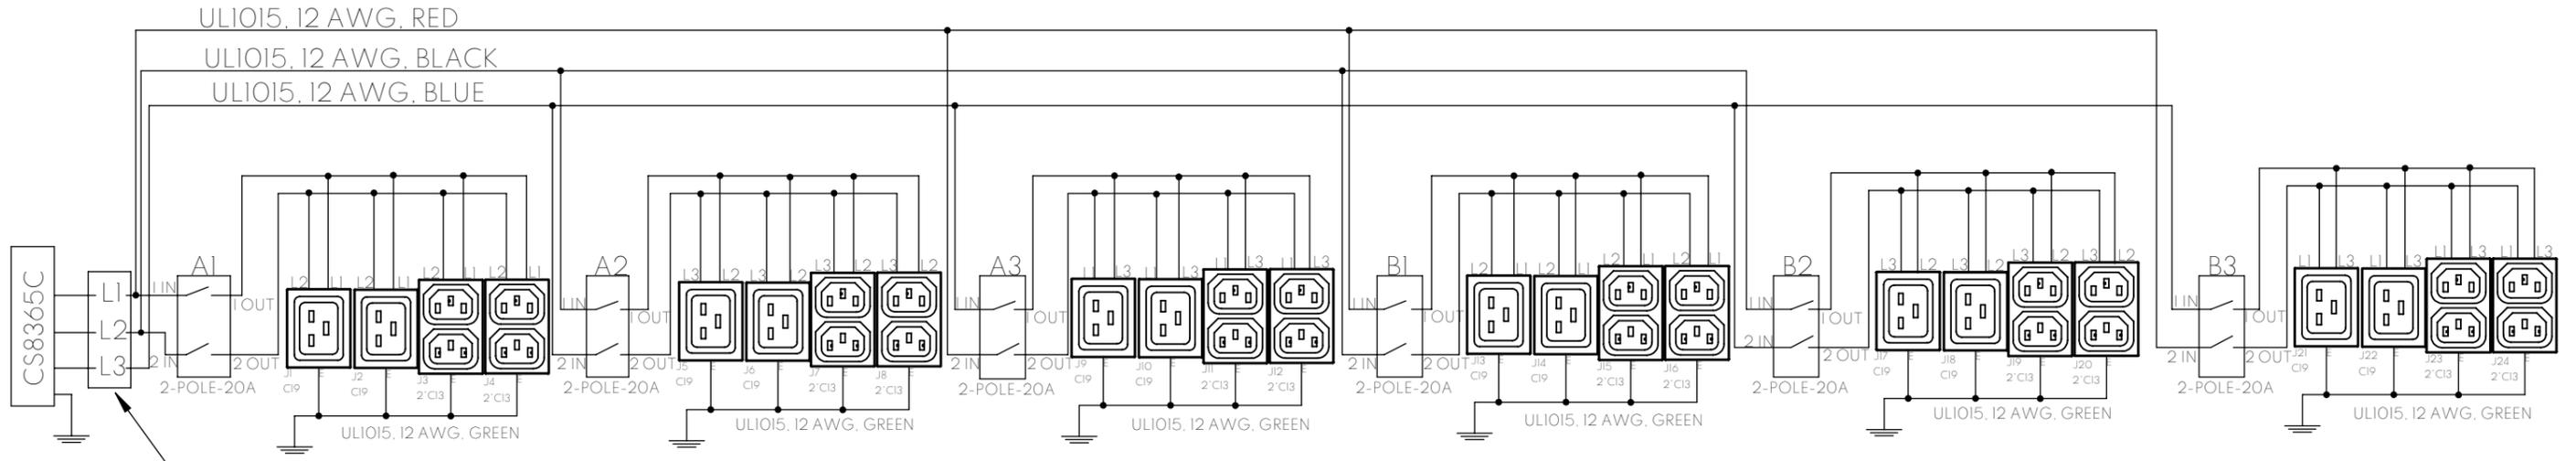

INTERNAL TERMINAL BLOCK

WIRE IDENTIFICATION CHART 3 PHASE 208V	
WIRE BRANCH	COLOR
LEG 1	BLACK
LEG 2	RED
LEG 3	BLUE OR ORANGE
EARTH GROUND	GREEN - GREEN/YELLOW

<p><b>PROPRIETARY AND CONFIDENTIAL</b></p> <p>This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.</p>	<p>UNLESS OTHERWISE SPECIFIED</p> <p>X = ± 1  X.X = ± 0.5  X.XX = ± 0.30  X.XXX = ± 0.130</p> <p>ANGULAR  X = 1°  .X = 0.5°  .XX = 0.25°</p>		<p>4670 AIRCENTER CIRCLE  RENO, NV 89502</p>	<p>DESCRIPTION:</p> <p><b>208V/50A, THREE PHASE DELTA, 36 OUTLETS, 24 C13, 12 C19, CS8365C</b></p>	
	<p>COMMENTS:</p>			<p>MATERIAL:</p>	
	<p>NAME</p> <p>DATE</p>	<p>FINISH:</p>	<p>CLASS:</p> <p><b>A</b></p>	<p>SIZE:</p> <p><b>A3</b></p>	<p>REV NO:</p> <p><b>A</b></p>
	<p>UNITS: mm [in]</p>	<p>INTERPRET TO ASME Y14.100</p>	<p>DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX</p>	<p>SCALE: 2:1</p>	<p>WEIGHT:</p>