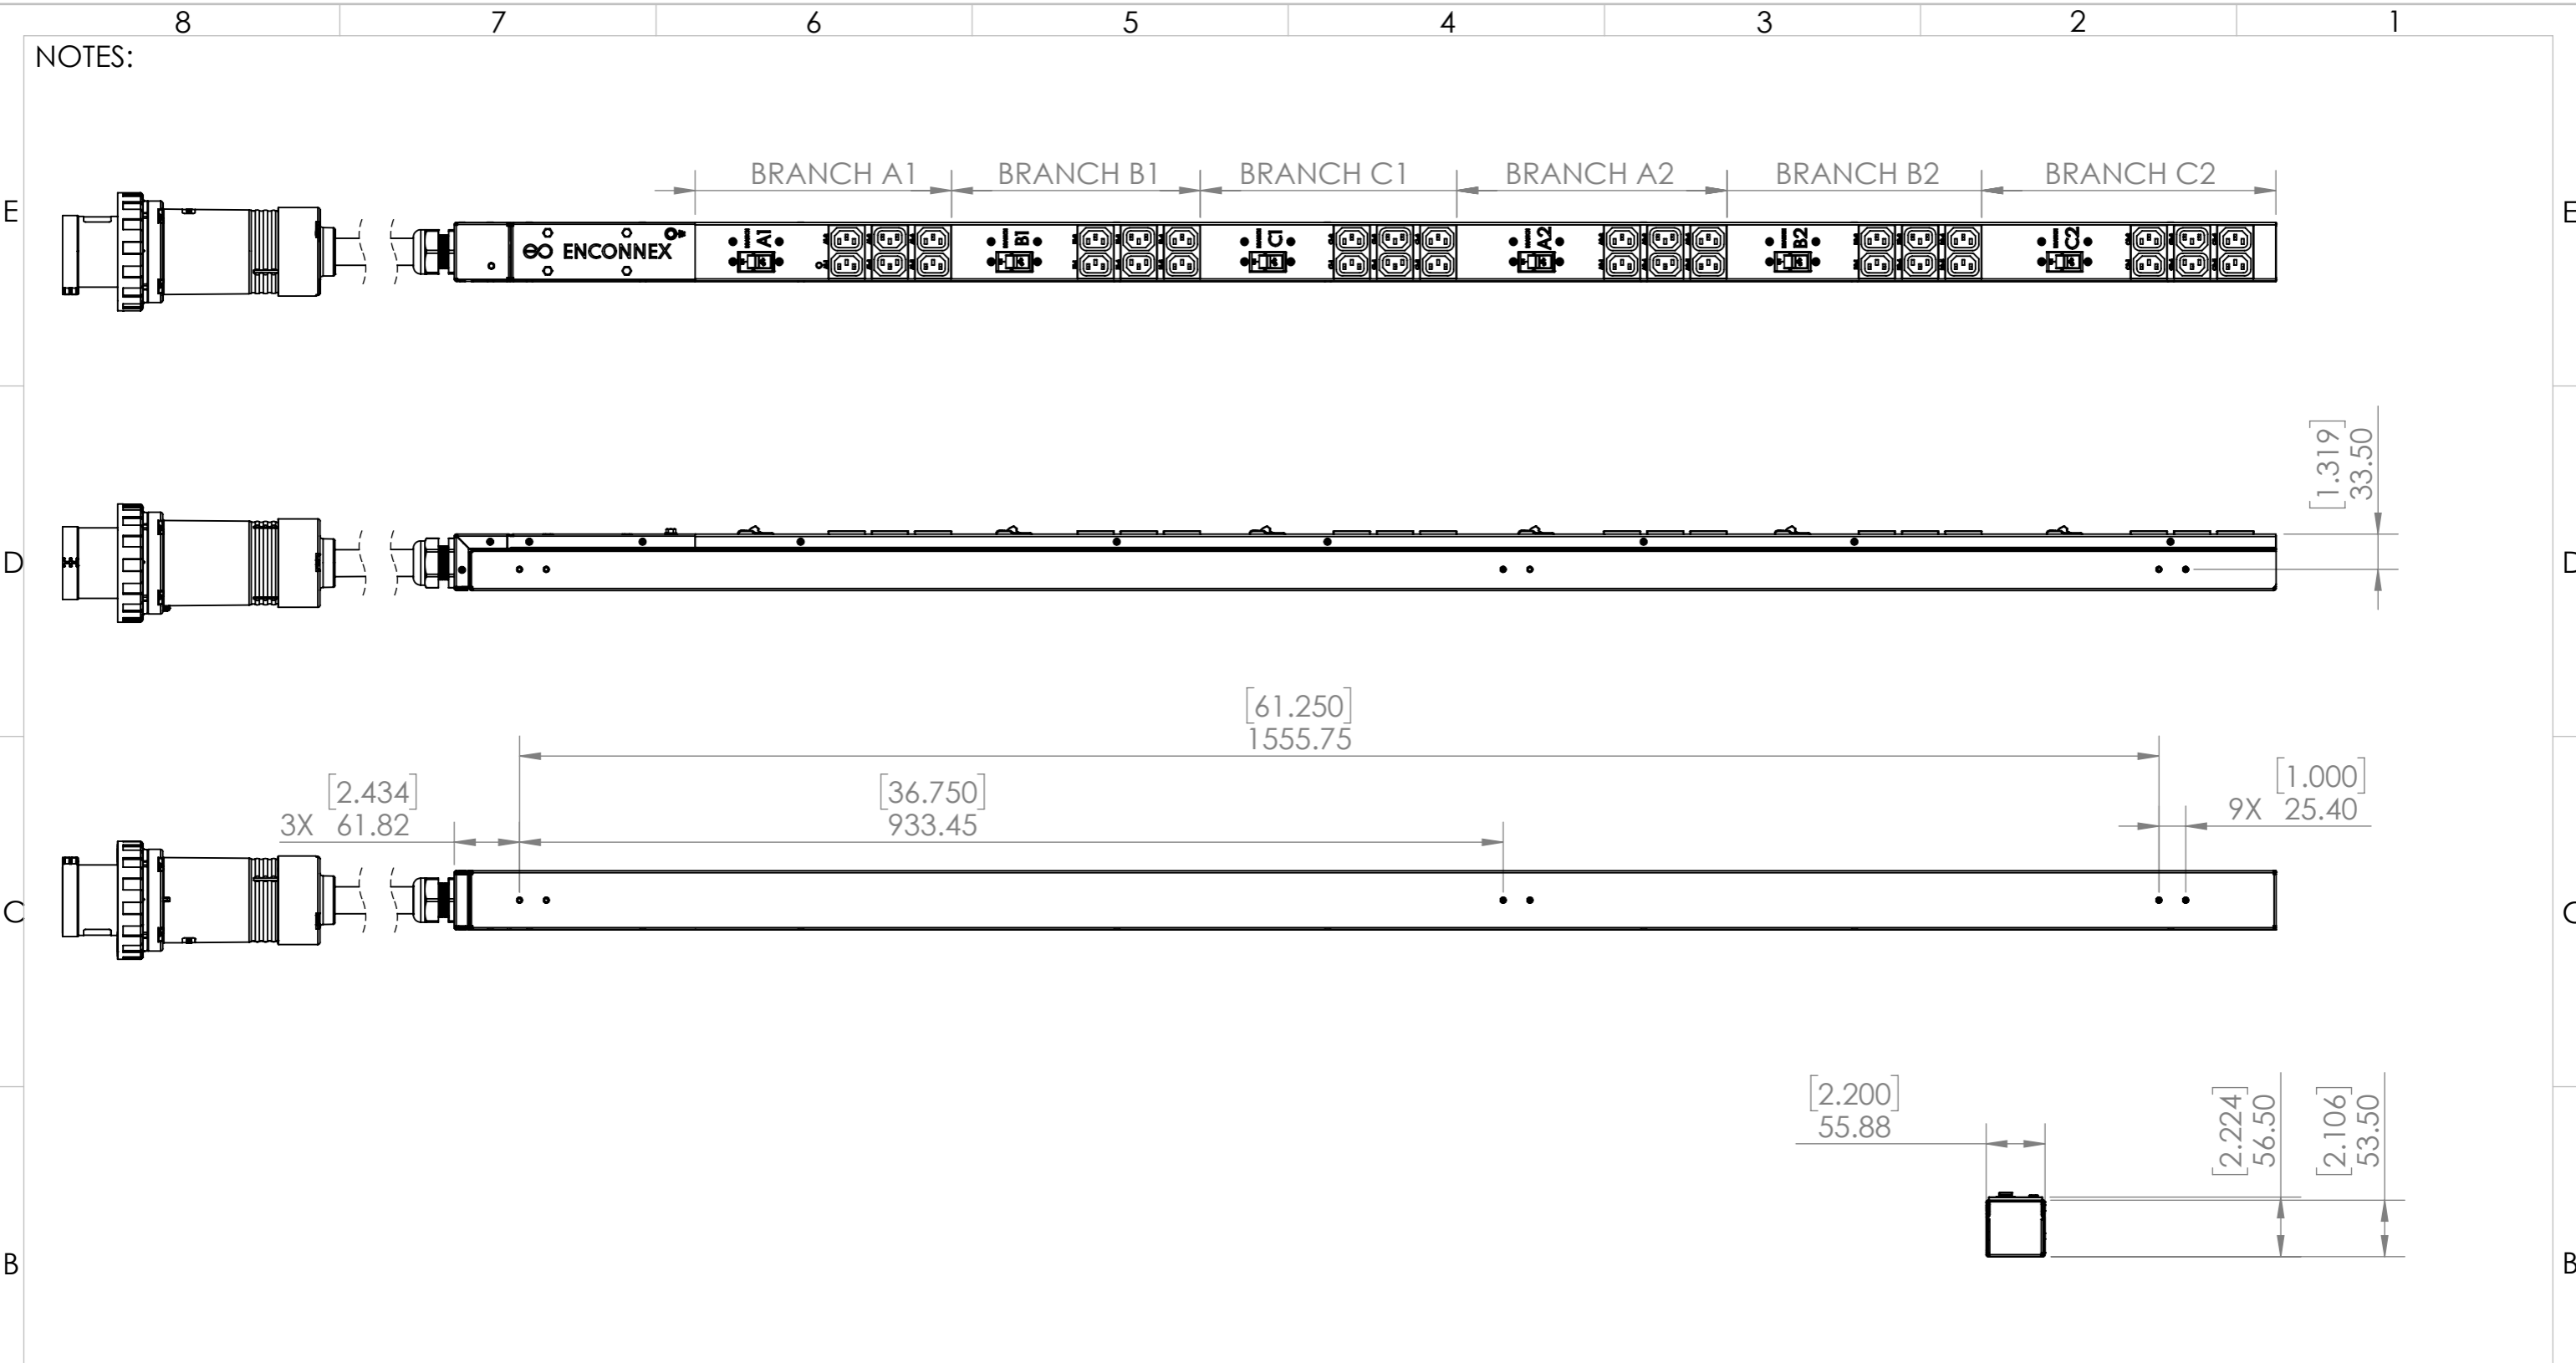





NOTES:



PLUG/ RECEPTACLE BLOCK	
	PLUG IEC309 460P9, 3P-4W 60A, 120/208VAC
	RECEPTACLE IEC 60320/C13 10A, 250V MAX RATED OUTPUT

UNIT TYPE: BASIC UNIT
 ORENTATION: VERTICAL, OU FULL
 OUTLET QTY & TYPE: (36) C13
 INPUT VOLTAGE: 120/208VAC
 INPUT CURRENT: 48A
 BREAKER QTY & TYPE: (6) DUAL POLE HYDRAULIC MAGNETIC
 INPUT PHASE: THREE PHASE DELTA
 RATED POWER: 9.984kVA
 INPUT PLUG: IEC309 460P9 (IP44)
 INPUT POWER CORD: 3M (10') TOP FEED
 REGULATORY STANDARD: CSA COMPLIANCE

PROPRIETARY AND CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED		 4670 AIRCENTER CIRCLE RENO, NV 89502		DESCRIPTION:	
This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.		X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°				208V/60A, THREE PHASE DELTA, 36 OUTLETS, 36 C13 IEC309 460P9 (IP44)	
COMMENTS:		MATERIAL:		FINISH:		CLASS:	
NAME	DATE	DRAWN BY		APP. BY		SIZE: A3	DRAWING NO: EPB1M36A
UNITS: mm [in]		INTERPRET TO ASME Y14.100		DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX		SCALE: 1:6	WEIGHT:
						SHEET: 1 OF 2	

NOTES:

REV.	DESCRIPTION	DATE	APPROVAL
A	INITIAL RELEASE	08/04/2021	KP/BL

E

E

D

D

C

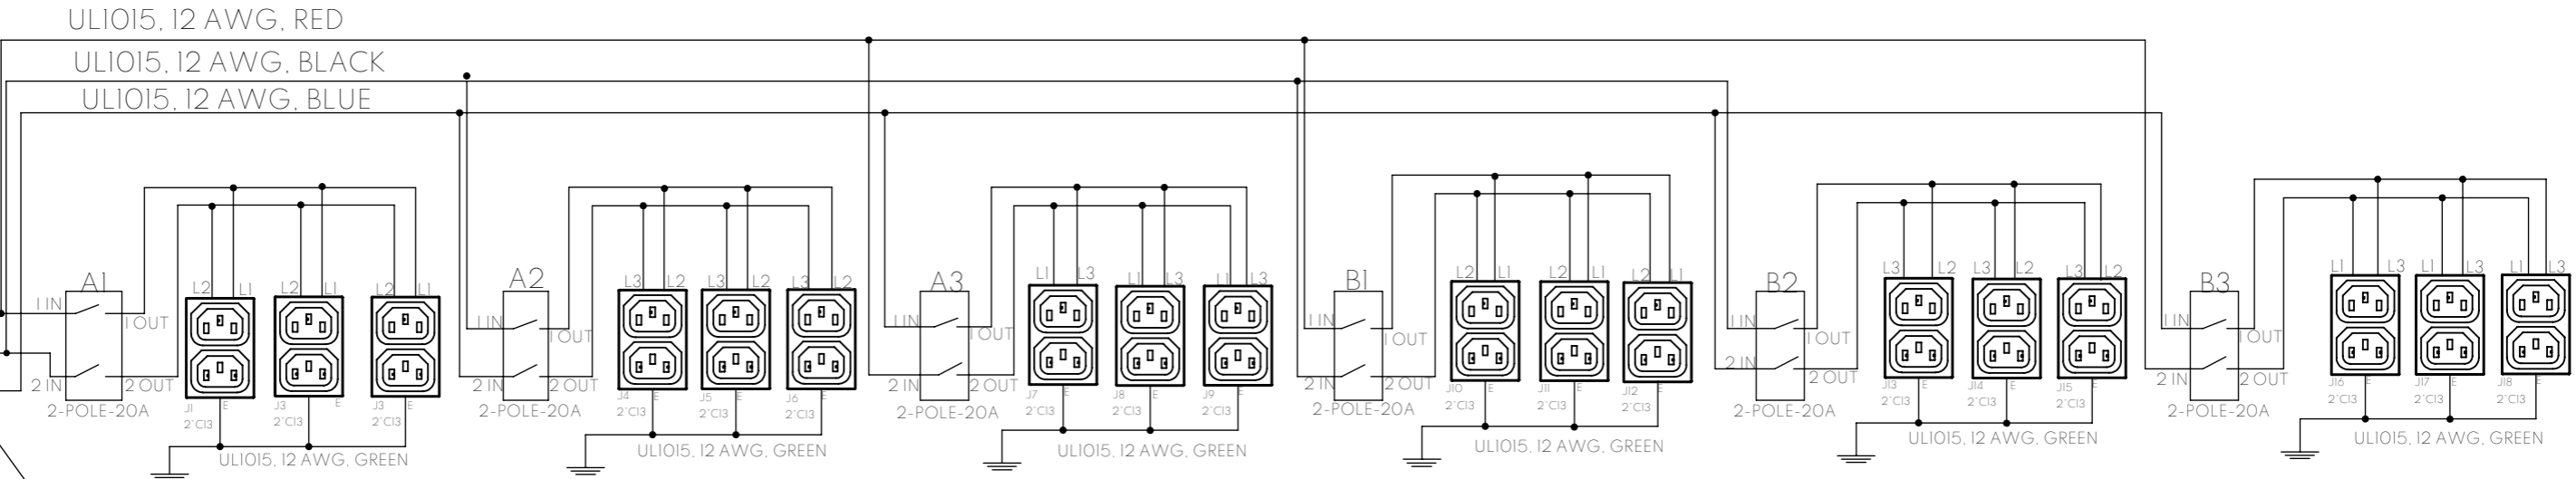
C

B

B

A

A



INTERNAL TERMINAL BLOCK

WIRE IDENTIFICATION CHART 3 PHASE 208V	
WIRE BRANCH	COLOR
LEG 1	BLACK
LEG 2	RED
LEG 3	BLUE OR ORANGE
EARTH GROUND	GREEN - GREEN/YELLOW

<p>PROPRIETARY AND CONFIDENTIAL</p> <p>This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.</p>	<p>UNLESS OTHERWISE SPECIFIED</p> <p>X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130</p> <p>ANGULAR X = 1° X = 0.5° .XX = 0.25°</p>	<p>4670 AIRCENTER CIRCLE RENO, NV 89502</p>	<p>DESCRIPTION:</p> <p>208V/60A, THREE PHASE DELTA, 36 OUTLETS, 36 C13 IEC309 460P9 (IP44)</p>			
			<p>COMMENTS:</p>	<p>MATERIAL:</p>	<p>FINISH:</p>	<p>CLASS:</p> <p>A</p>
<p>UNITS: mm [in]</p>	<p>INTERPRET TO ASME Y14.100</p>	<p>DEBURR AND BREAK SHARP EDGES/CONTOURS AT 0.2mm MAX</p>	<p>SCALE: 2:1</p>	<p>WEIGHT:</p>	<p>SHEET: 2 OF 2</p>	

8

7

6

5

4

3

2

1