
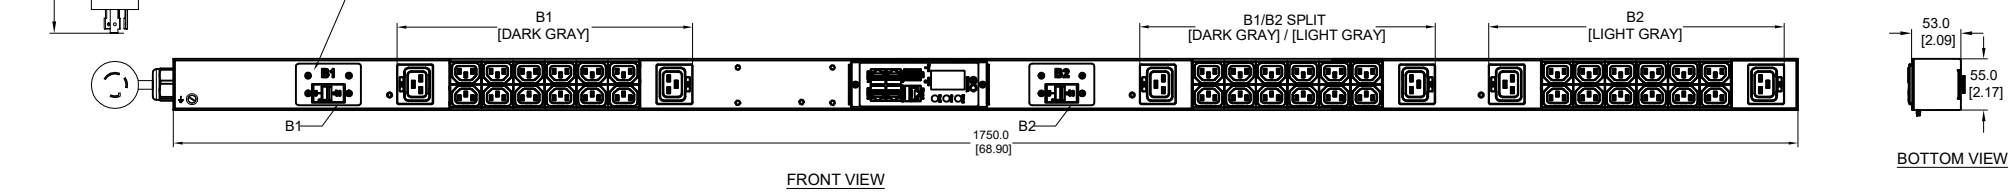
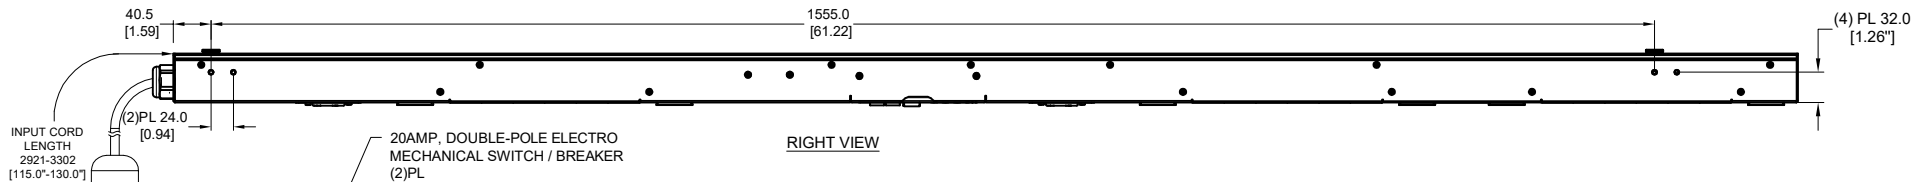
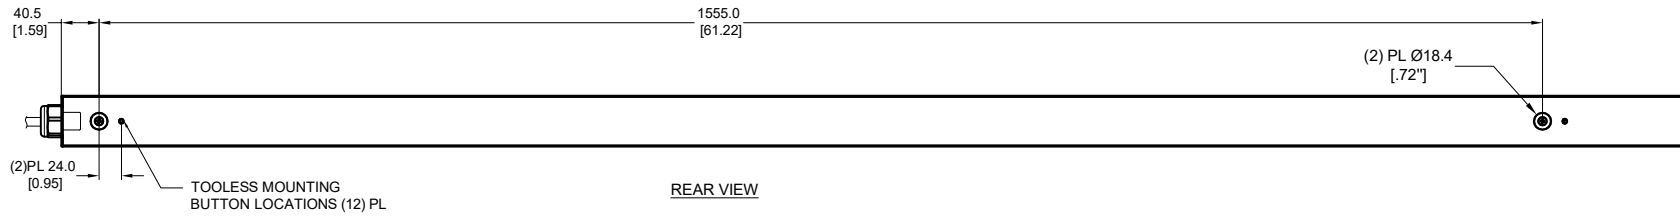


REV	REV DATE	DESCRIPTION	APPROVAL
A	2020-04-28	RELEASE	SDRF

Notes/Instructions:

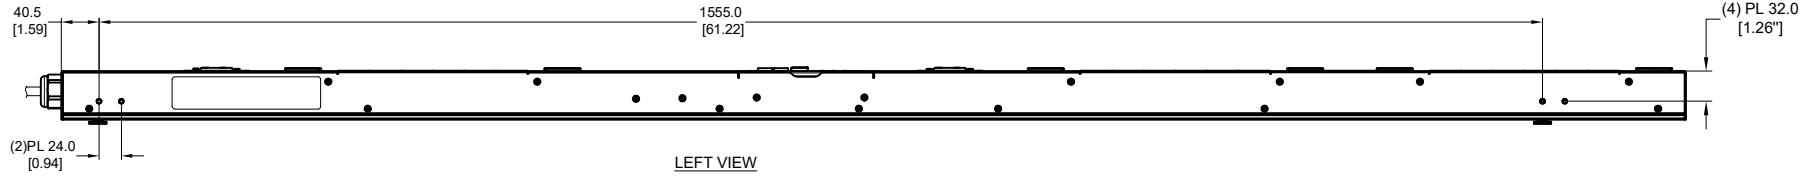

BOTTOM VIEW

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

PLUG/RECEPTACLE BLOCK



PLUG
NEMA L6-30P, 2P 3W
30A, 250V MAX RATED INPUT
24A DERATED



RECEPTACLE
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLE
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

SPECIFICATION:

- STANDARD:
 - UNIT TYPE: INPUT METERED
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY&TYPE: (36)C13, (6)C19
 - INPUT VOLTAGE: 208-240 VAC
 - INPUT CURRENT: 30 (24A DERATED)
 - BREAKER QTY&TYPE: (2) 20AMP, DOUBLE-POLE
 - INPUT PHASE: SINGLE-PHASE
 - RATED POWER: 5.0 kVA
 - INPUT PLUG: NEMA L6-30P
 - INPUT POWER CORD: [10'], BOTTOM FEED
 - REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL: NONE
- ACCESSORIES: (1) QUICK-START GUIDE

TOLERANCES LINEAR (mm) X = ±1 XX = ±0.5 XXX = ±0.30 XXXX = ±0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 88502	PART NUMBER: ECX-MV1236060-E
	DESCRIPTION:		DESCRIPTION:
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: LEO	APPROVED BY: R. FAULKNER	ORG DATE: 2020-04-28
	UNITS: mm [in]	INTERPRET TO ASME Y14.100	SCALE: 1 : 1
		SHEET: 1/2	REV: A


REV	REV DATE	DESCRIPTION	APPROVAL
A	2020-04-28	RELEASE	SDRF

Notes/Instructions:

30A_366



Input Cable Type: SJT; 90°C; 300V; 10AWG; 3C
 Internal Wire Type: UL AWM 1015, 105°C, 12/18AWG

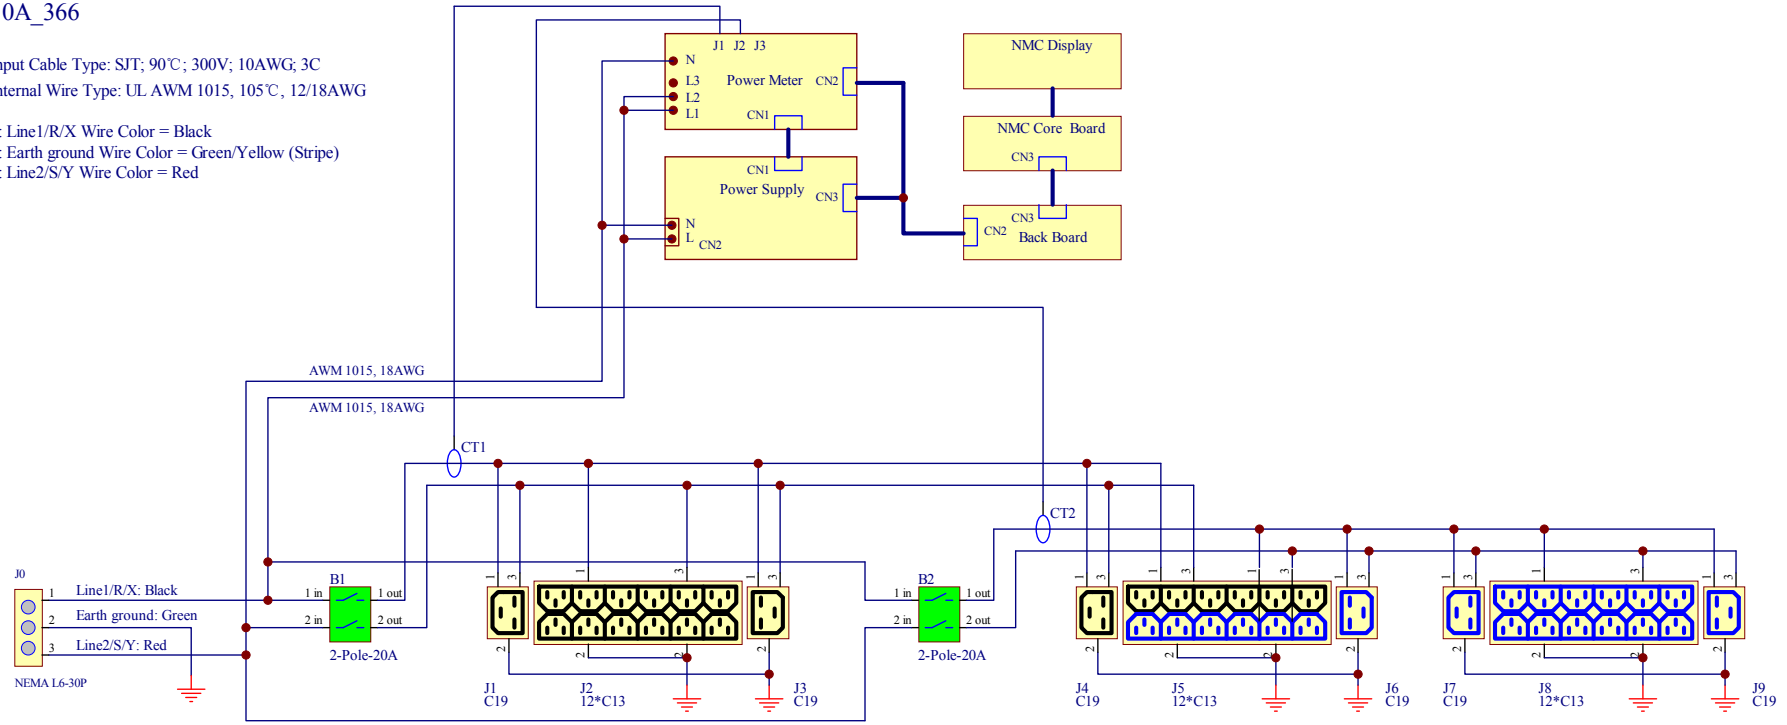- 1: Line1/R/X Wire Color = Black
- 5: Earth ground Wire Color = Green/Yellow (Stripe)
- 3: Line2/S/Y Wire Color = Red



Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ±1 XX = ±0.5 XXX = ±0.30 XXXX = ±0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 ENCONNEX 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-MV1236060-E
	DESCRIPTION:		DESCRIPTION:
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: LED	ORG DATE: 2020-04-28	
	UNITS: mm [in]	APPROVED BY: R. FAULKNER	REV DATE:
INTERPRET TO ASME Y14.100		SIZE: A3	SCALE: 1 : 1
		SHEET: 2/2	REV: A