


**SPECIFICATION:**

1. STANDARD:

UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(36) C13, (6) C19
INPUT VOLTAGE:	200-240/346-415VAC
INPUT CURRENT:	16A
BREAKER QTY&TYPE:	N/A
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	11.0kVA
INPUT PLUG:	IEC 60309 3P+N+E 6H 16A
INPUT POWER CORD:	3m [10'], TOP FEED
REGULATORY STANDARD:	RoHS COMPLIANT

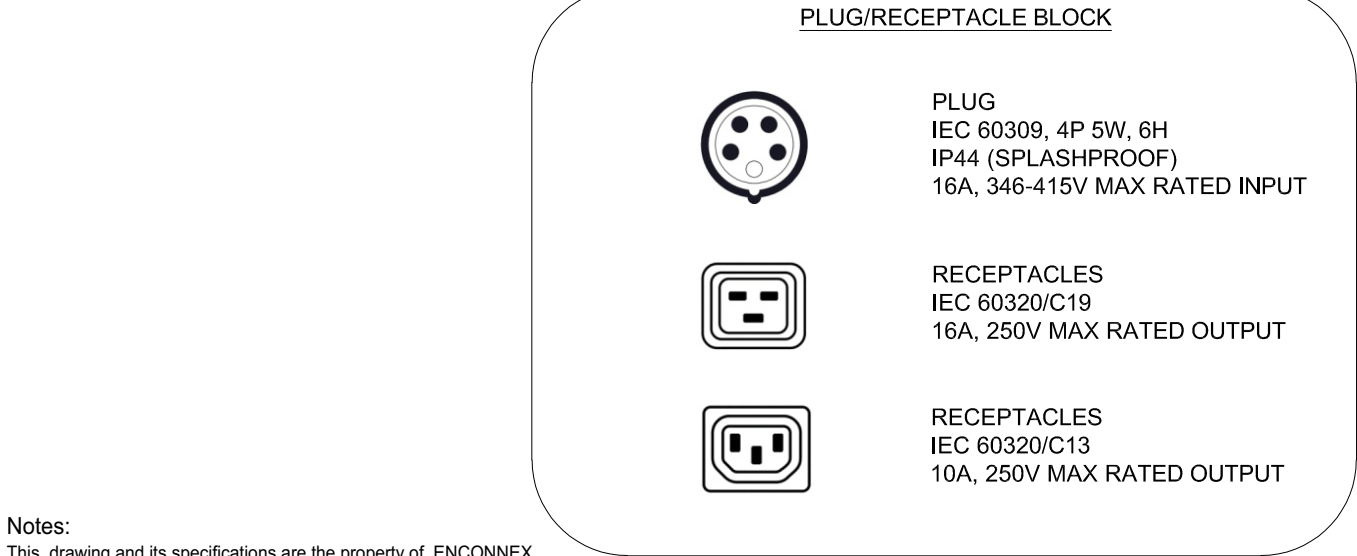

**Notes:**


This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° X = 0.5° XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-MV1636060-R
	DESCRIPTION:		DESCRIPTION: 415V/16A, Three Phase, 42 outlets, 36 C13, 6 C19, IEC 60309
 UNITS: mm [in]	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: Leo Liu	ORG DATE: 2019-06-19
	INTERPRET TO ASME Y14.100	APPROVED BY: R. FAULKNER	REV DATE:
		SIZE: A2	SCALE: 1 : 1
		SHEET: 1/2	REV: A

Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-06-19	RELEASE	



- NOTES:
1. INTERNAL WIRING:
- |                     |                         |
|---------------------|-------------------------|
| WIRE TYPE:          | UL AWM 1015, 12 & 18AWG |
| LINE 1/R/X COLOR:   | BROWN                   |
| LINE 2/S/Y COLOR:   | BLACK                   |
| LINE 3/T/Z COLOR:   | WHITE                   |
| EARTH GROUND COLOR: | GREEN/YELLOW STRIPE     |
| NEUTRAL WIRE COLOR: | BLUE                    |

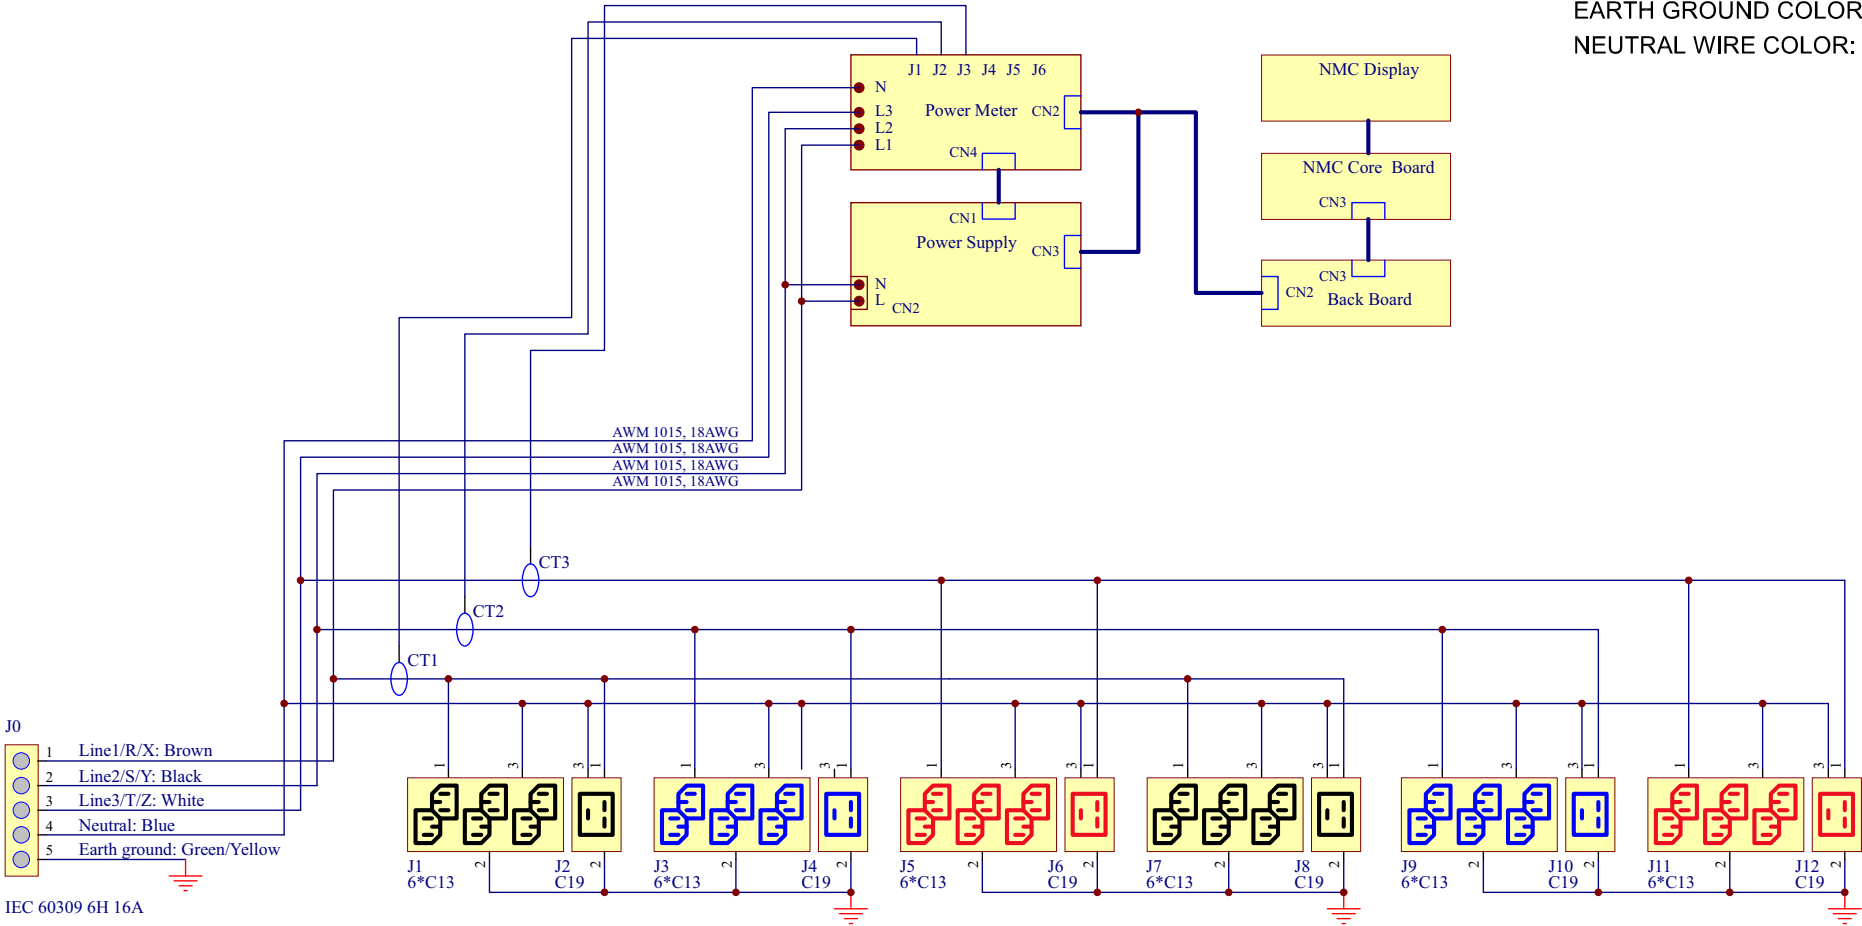

INTERNAL WIRING SCHEMATIC

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

<div>TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° X = 0.5° .XX = 0.25°</div> <div></div> <div>UNITS: mm [in]</div>	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-MV1636060-R
	DESCRIPTION:		DESCRIPTION: Wiring Scheme
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: Jing Zhang	ORG DATE: 2019-06-19
	INTERPRET TO ASME Y14.100	APPROVED BY: R. FAULKNER	REV DATE:
		SIZE: A4	SCALE: 1 : 1
		SHEET: 2/2	REV: A