Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2020-06-03	RELEASE	SD/RF

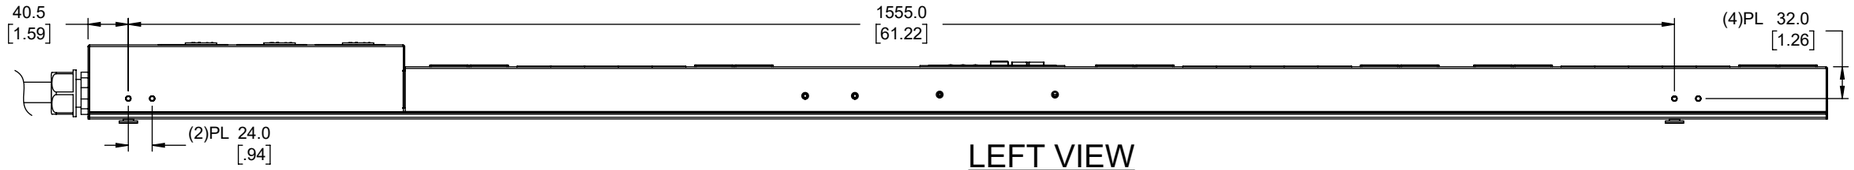

LEFT VIEW

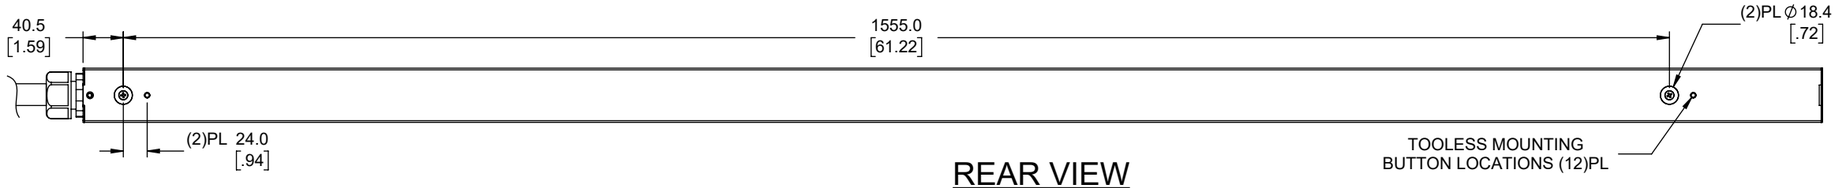

REAR VIEW

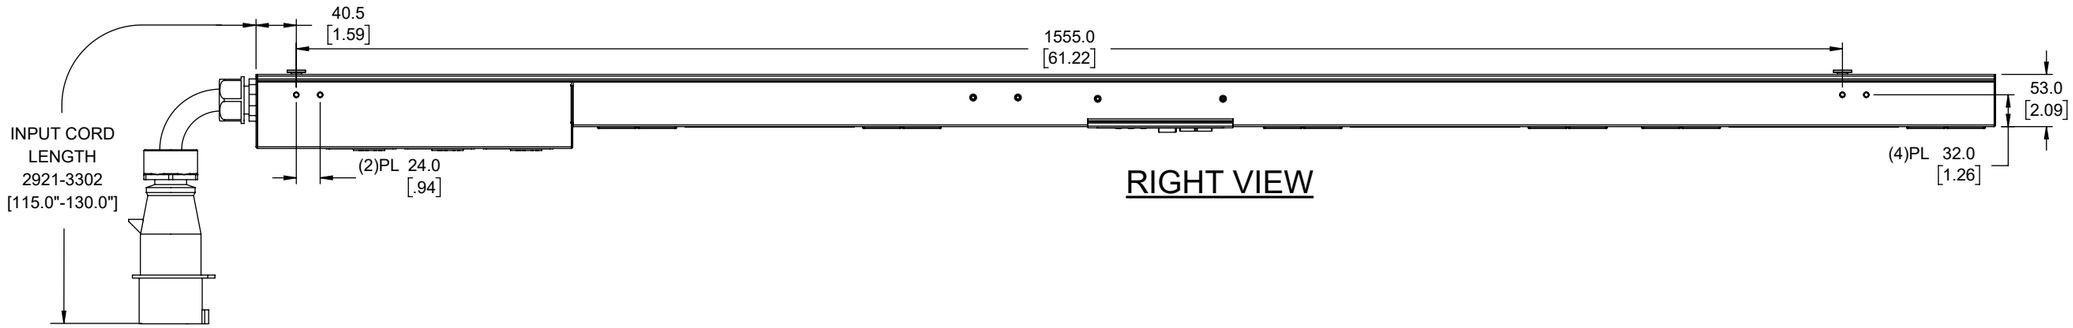

RIGHT VIEW

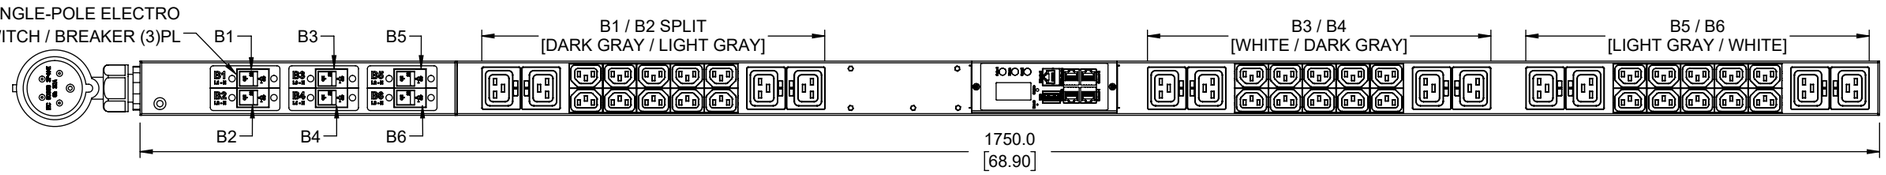

FRONT VIEW



BOTTOM VIEW

PLUG/RECEPTACLE BLOCK

PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPLASHPROOF)
30A / 32A, 346-415V MAX RATED INPUT
(24A DERATED)

RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT

RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

UNIT TYPE:	INPUT METERED
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY & TYPE:	(30)C13, (12)C19
INPUT VOLTAGE:	400-415VAC
INPUT CURRENT:	30A (24A DERATED) / 32A
BREAKER QTY & TYPE:	(6) 20AMP, SINGLE-POLE 10kAIC
INPUT PHASE:	THREE-PHASE (DUAL RATED)
RATED POWER:	17.3 kVA (NAM) / 22.1 kVA (EMEA)
INPUT PLUG:	IEC 60309 532P6 IP44
INPUT POWER CORD:	3m[10'], TOP FEED
REGULATORY STANDARD:	RoHS COMPLIANT

Notes:
This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	ENCONNEX 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-MV1730121-T DESCRIPTION:
	DESCRIPTION:		
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: huang	ORG DATE: 2020-06-03
		APPROVED BY: Hanson	REV DATE: 2020-06-03
UNITS: mm [in]	INTERPRET TO ASME Y14.100	SIZE: B / SCALE: 1 : 1	SHEET: 1/2 / REV: A

Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2020-06-03	RELEASE	SD/RF

Internal Wire Type: UL AWM 1015, 10/12/18AWG

LINE 1/R/X COLOR:	BROWN
LINE 2/S/Y COLOR:	BLACK
LINE 3/T/Z COLOR:	WHITE
EARTH GROUND COLOR:	GREEN/YELLOW STRIPE
NEUTRAL WIRE COLOR:	BLUE

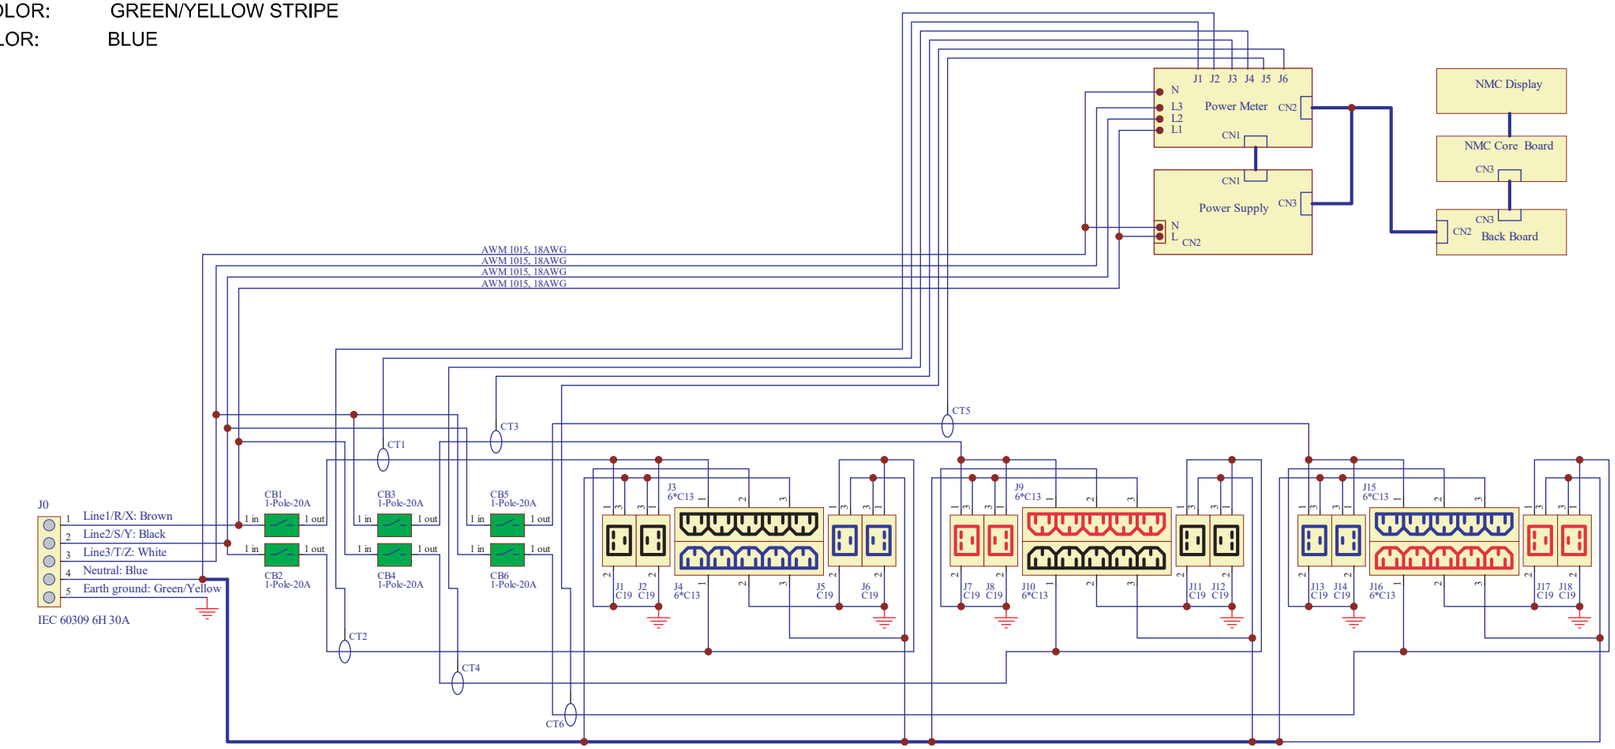

Notes:
This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL: DESCRIPTION:	ENCONNEX 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-MV1730121-T DESCRIPTION:
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: huang	ORG DATE: 2020-06-03
		APPROVED BY: Hanson	REV DATE: 2020-06-03
UNITS: mm [in]	INTERPRET TO ASME Y14.100	SIZE: B / SCALE: 1 : 1	SHEET: 2/2 / REV: A