

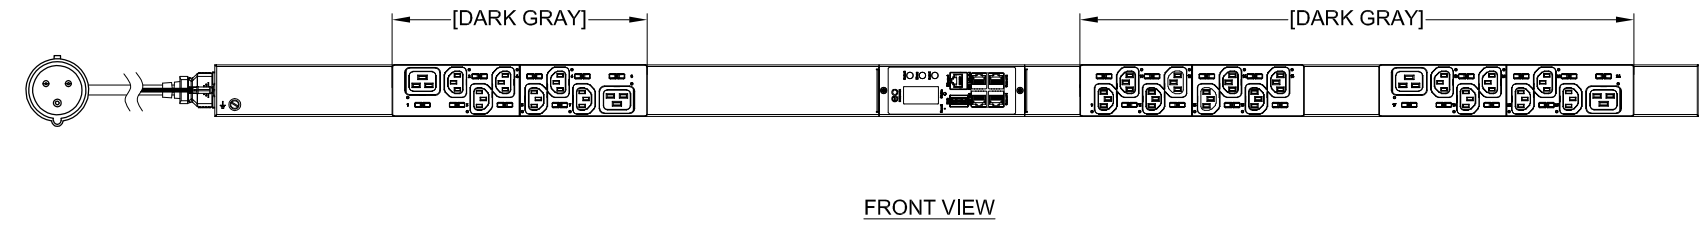
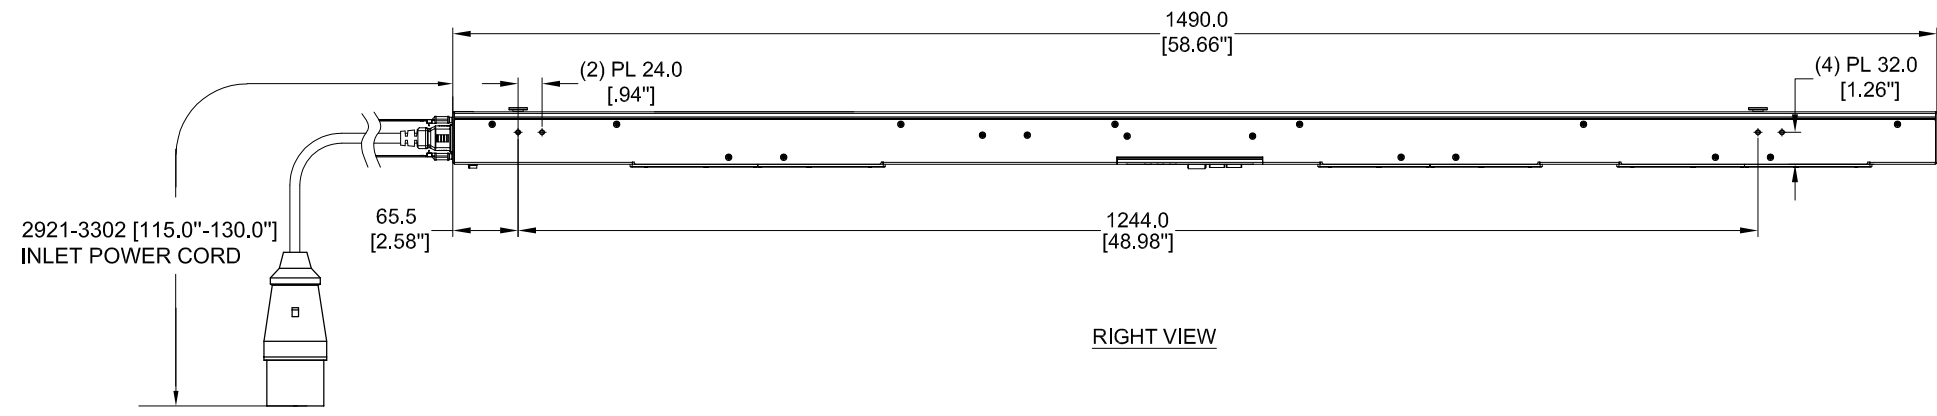
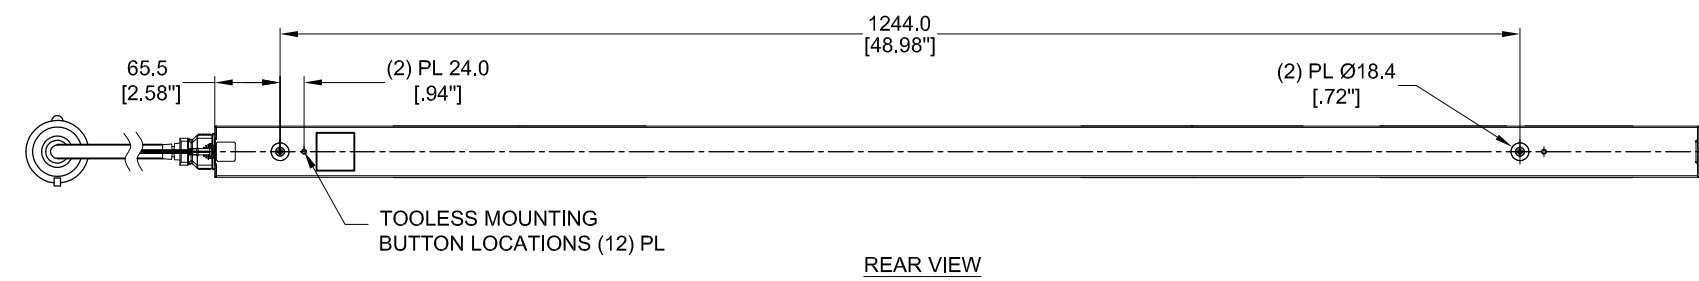


Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-06-19	RELEASE	

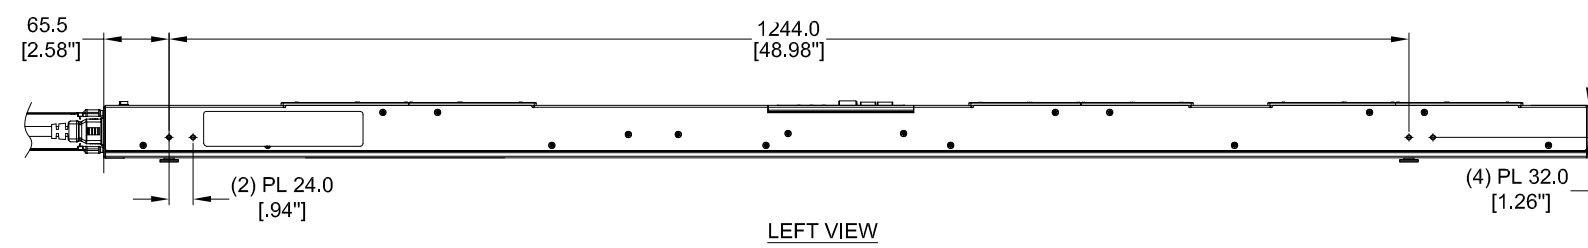

**SPECIFICATION:**  
 1. STANDARD:  
 UNIT TYPE: MONITORED SWITCHED  
 ORIENTATION: VERTICAL, MID  
 OUTLET QTY&TYPE: (20) C13, (4) C19  
 INPUT VOLTAGE: 100-240VAC  
 INPUT CURRENT: 16A  
 BREAKER QTY&TYPE: N/A  
 INPUT PHASE: SINGLE-PHASE  
 RATED POWER: 3.7kVA  
 INPUT PLUG: IEC 60309 2P+E 6H 16A  
 INPUT POWER CORD: 3m [10'], TOP FEED  
 REGULATORY STANDARD: RoHS COMPLIANT

**PLUG/RECEPTACLE BLOCK**

**PLUG**  
 IEC 60309, 2P 3W, 6H  
 IP44 (SPASHPROOF)  
 16A, 250V MAX RATED INPUT

**RECEPTACLES**  
 IEC 60320/C19  
 16A, 250V MAX RATED OUTPUT

**RECEPTACLES**  
 IEC 60320/C13  
 10A, 250V MAX RATED OUTPUT

**Notes:**  
 This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.


TOLERANCES LINEAR (mm) X = ±1 XX = ±0.5 XXX = ±0.30 XXXX = ±0.130 ANGULAR X = 1° XX = 0.5° XXX = 0.25°	MATERIAL:	ENCONNEX 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-SV1120040-N
	DESCRIPTION:		DESCRIPTION: 240V/16A, Single Phase, 24 outlets, 20 C13, 4 C19, IEC 60309
UNITS: mm [in]	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX INTERPRET TO ASME Y14.100	DRAWN BY: Leo Liu APPROVED BY: R. FAULKNER	ORG DATE: 2019-06-19 REV DATE:
		SIZE: A2 SCALE: 1:1	SHEET: 1/2 REV: A

Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-06-19	RELEASE	

NOTES:



- 1. INTERNAL WIRING:
  - WIRE TYPE: UL AWM 1015, 12 & 18AWG
  - LINE 1/R/X COLOR: BROWN
  - EARTH GROUND COLOR: GREEN/YELLOW STRIPE
  - NEUTRAL WIRE COLOR: BLUE

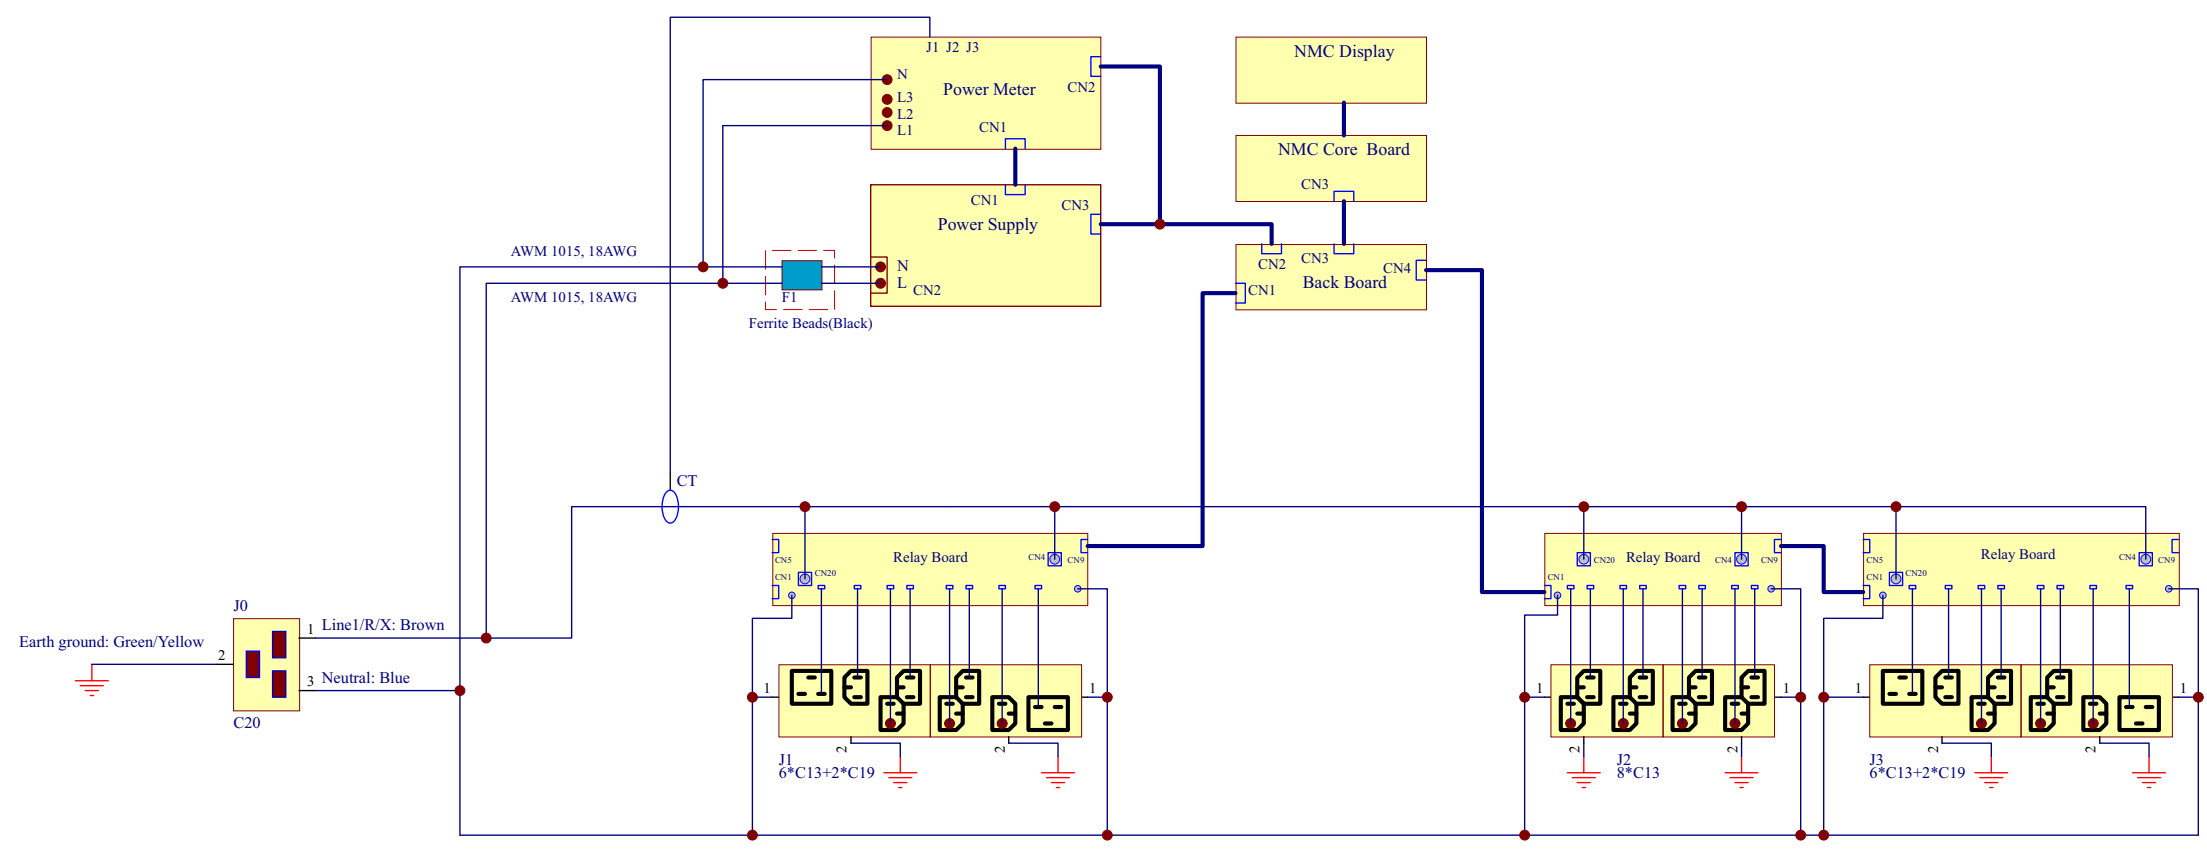

INTERNAL WIRING SCHEMATIC

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-SV1120040-N
	DESCRIPTION:		DESCRIPTION: Wiring Scheme
 DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX UNITS: mm [in]	INTERPRET TO ASME Y14.100	DRAWN BY: Jing Zhang	ORG DATE: 2019-06-19
	SCALE: 1 : 1	APPROVED BY: R. FAULKNER	REV DATE:
	SIZE: A4	SHEET: 2/2	REV: A