



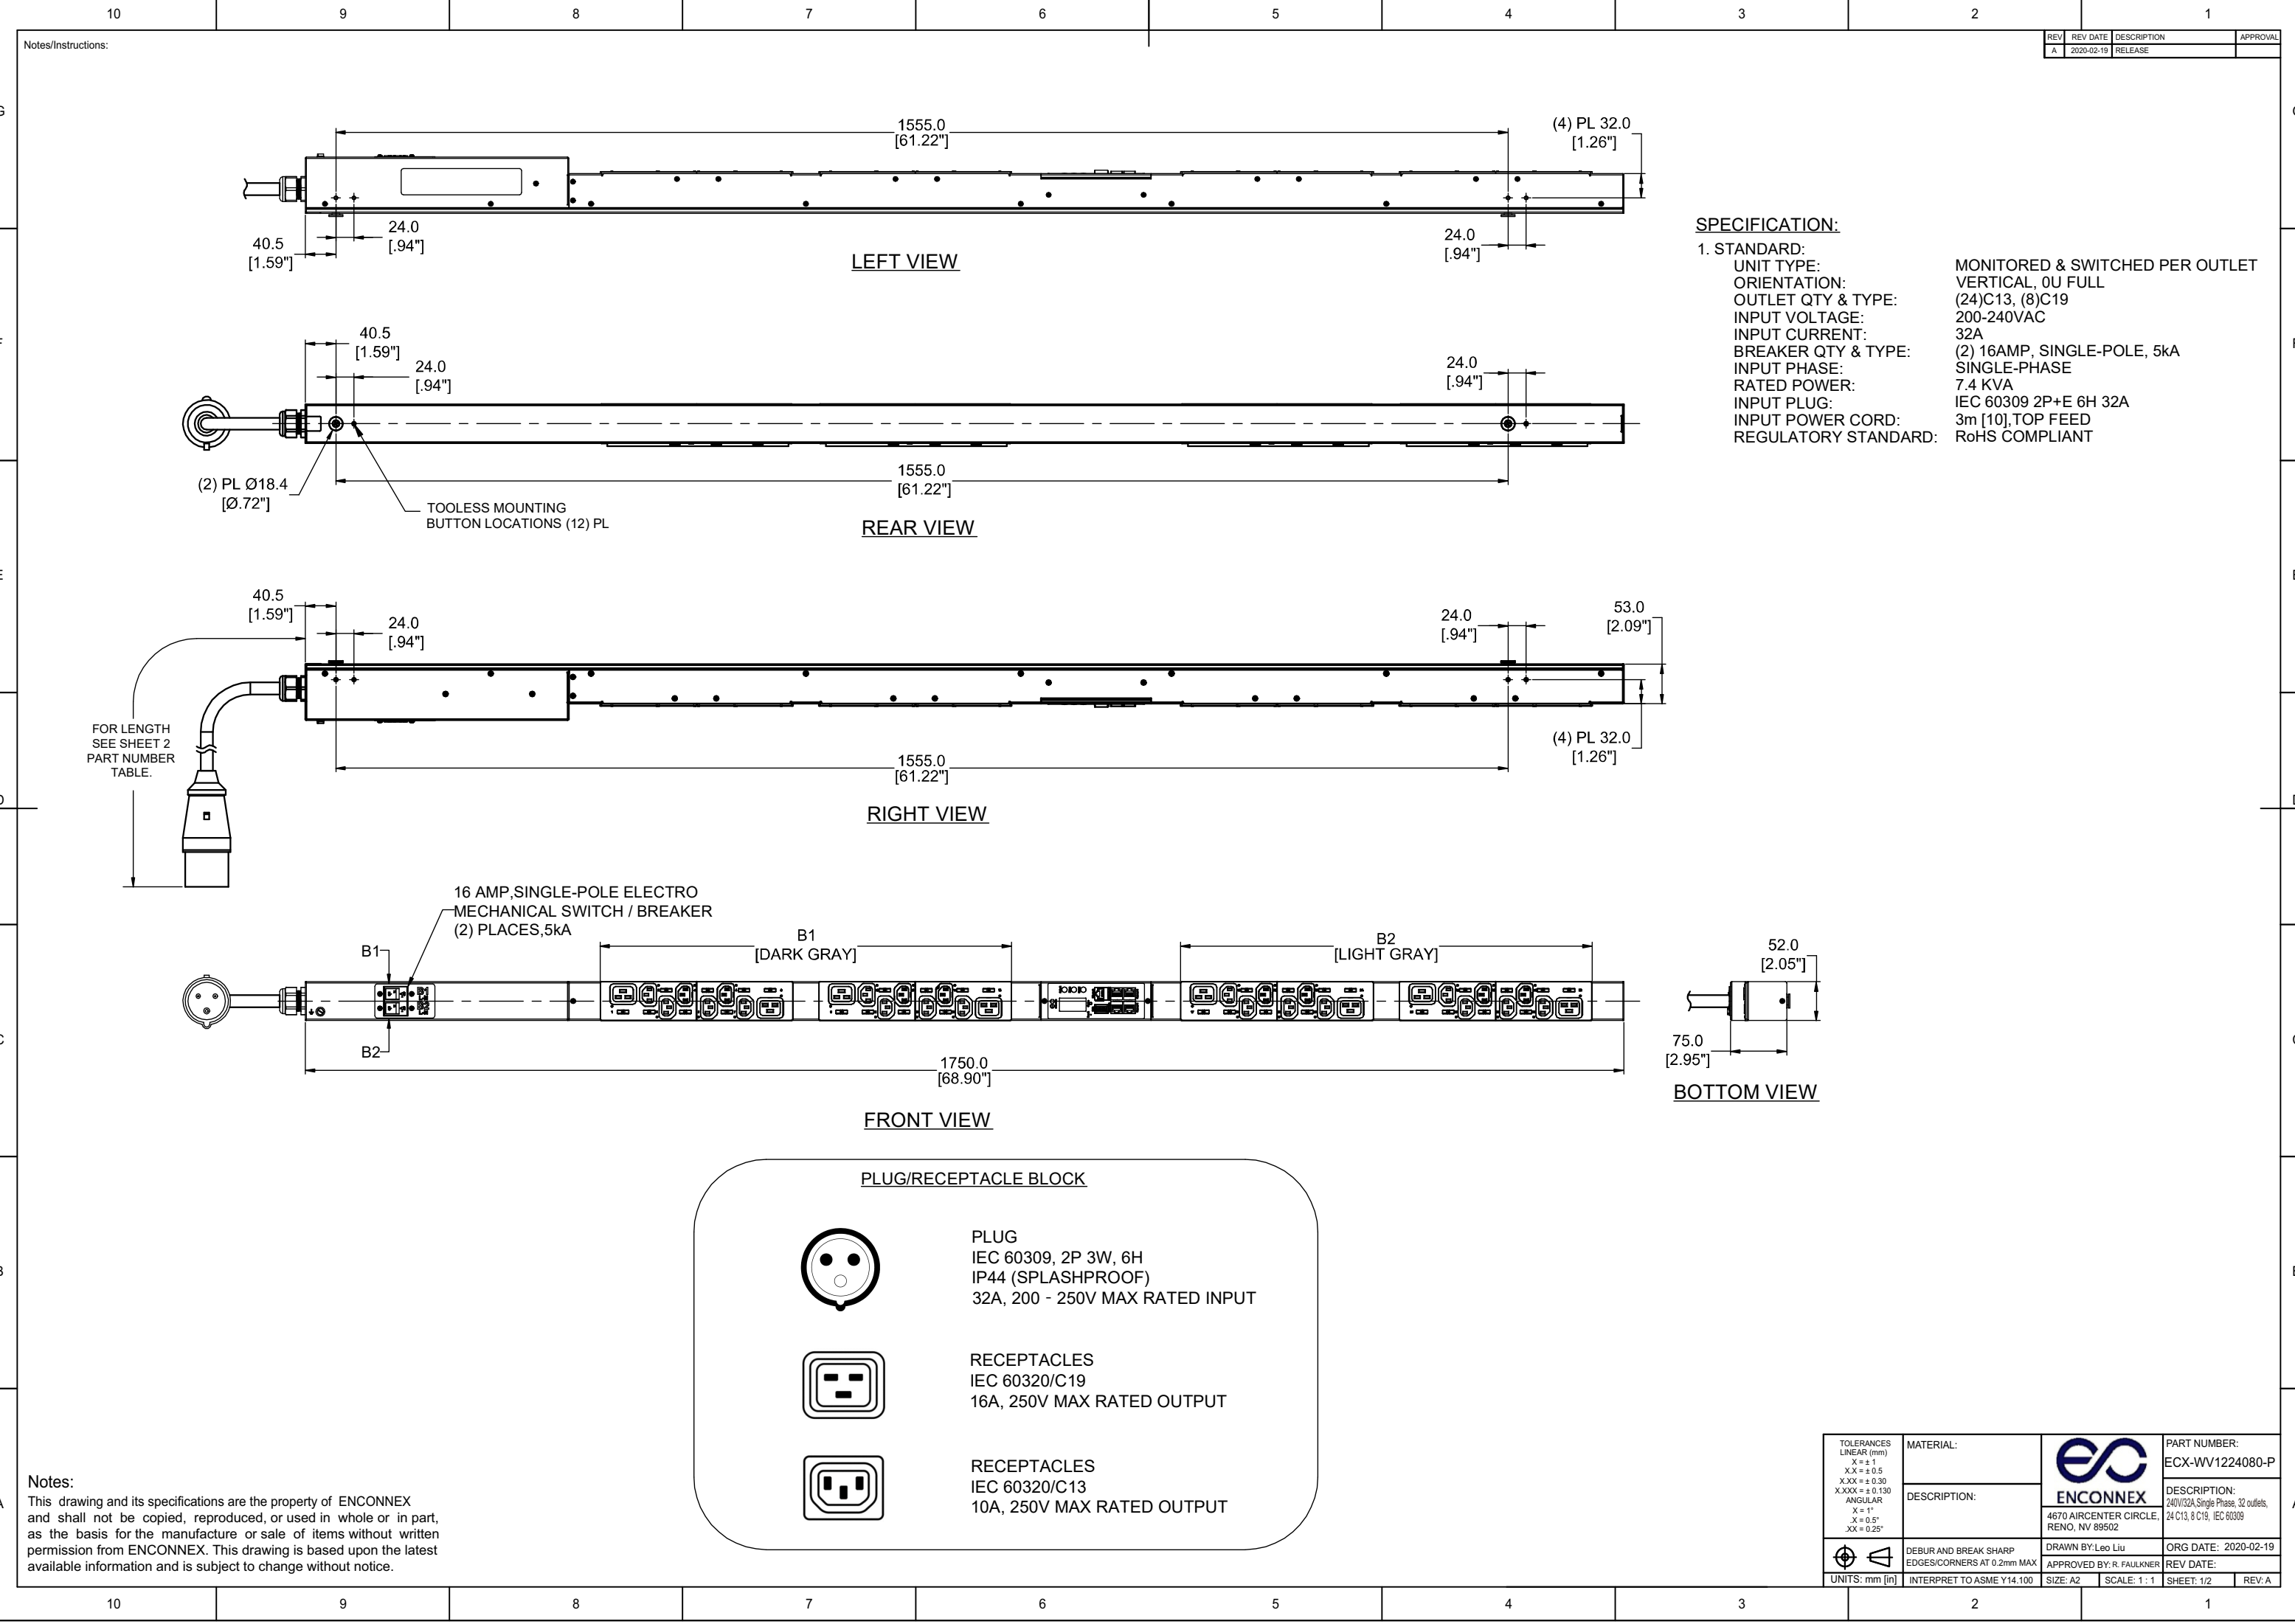

Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2020-02-19	RELEASE	


- NOTES:
1. INTERNAL WIRING:
- WIRE TYPE: UL AWM 1015, 10 & 12 & 18AWG
- LINE 1/R/X COLOR: BROWN
- EARTH GROUND COLOR: GREEN/YELLOW STRIPE
- NEUTRAL WIRE COLOR: BLUE
2. REFERENCE PANDUIT ENGINEERING PRODUCT SPECIFICATION SPS-EDI-497 FOR ADDITIONAL PRODUCT INFORMATION NOT SPECIFIED ON THIS DRAWING

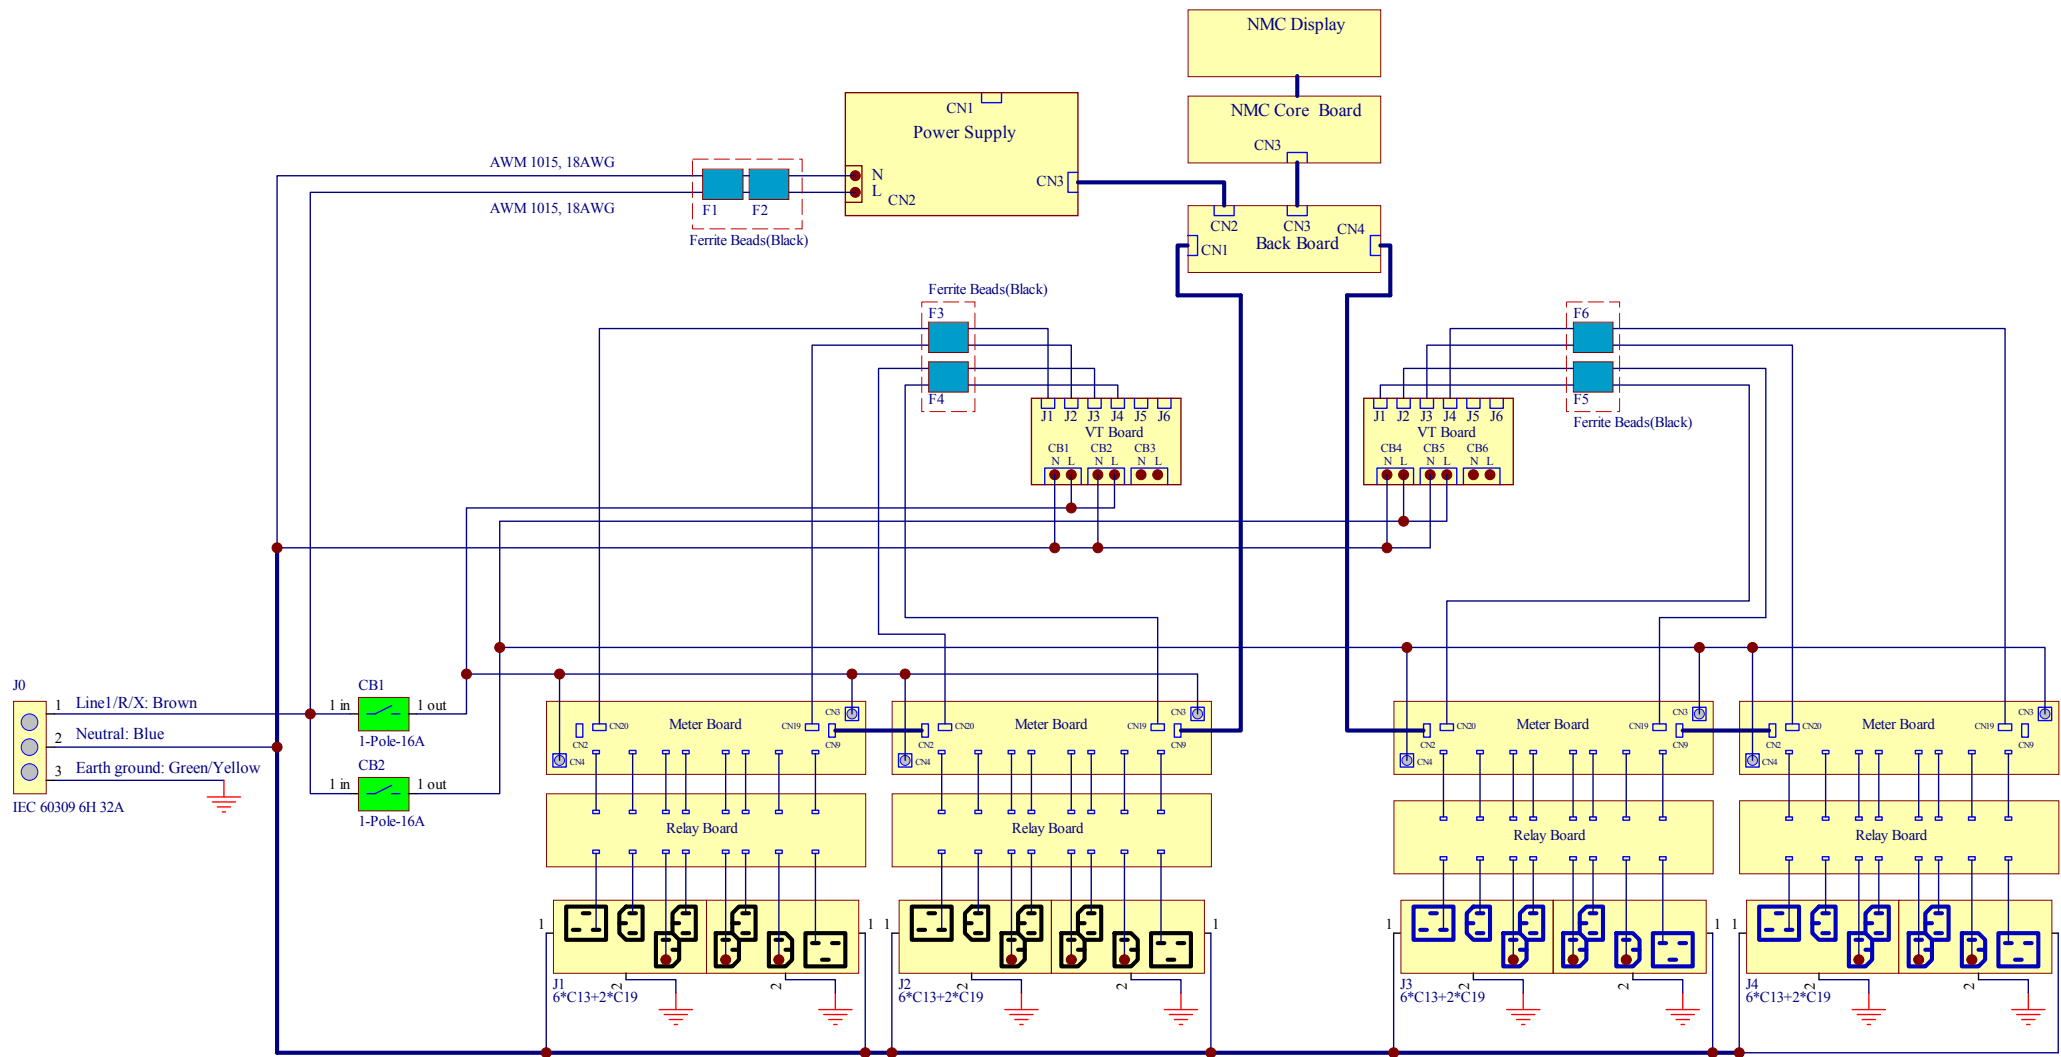

INTERNAL WIRING SCHEMATIC

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-WV1224080-P	
	DESCRIPTION:		DESCRIPTION: Wiring Scheme	
 UNITS: mm [in]	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: Jing Zhang	ORG DATE: 2020-02-19	
	INTERPRET TO ASME Y14.100	APPROVED BY: R. FAULKNER	REV DATE:	
SIZE: A4		SCALE: 1 : 1	SHEET: 2/2	REV: A