
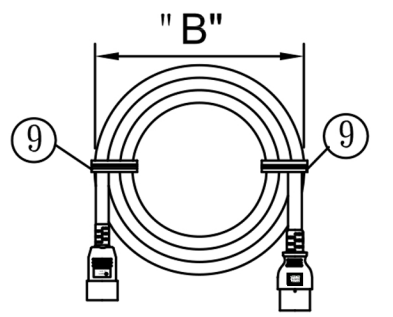
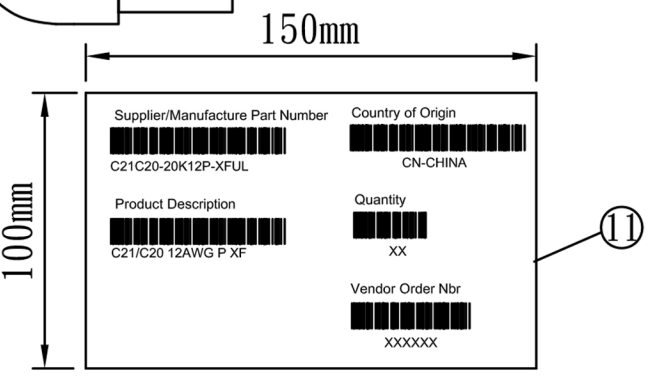
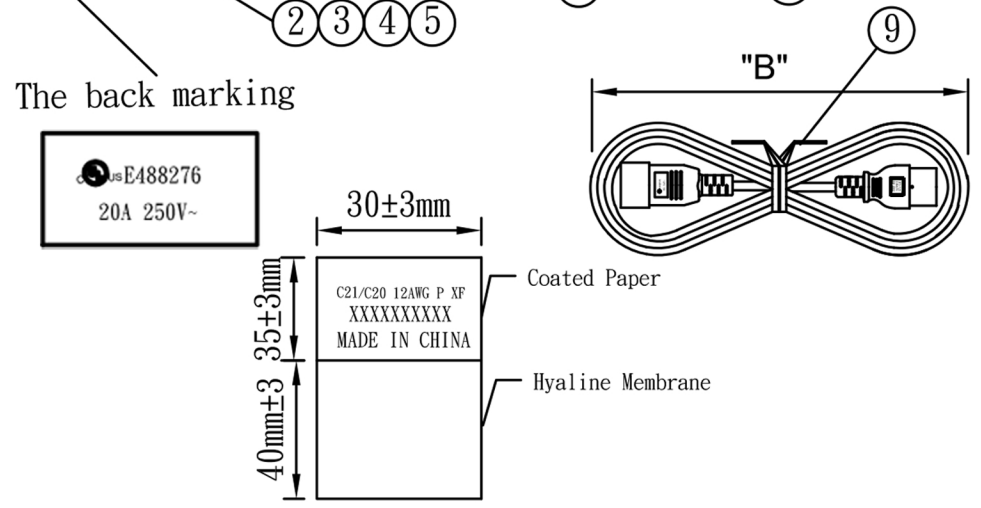
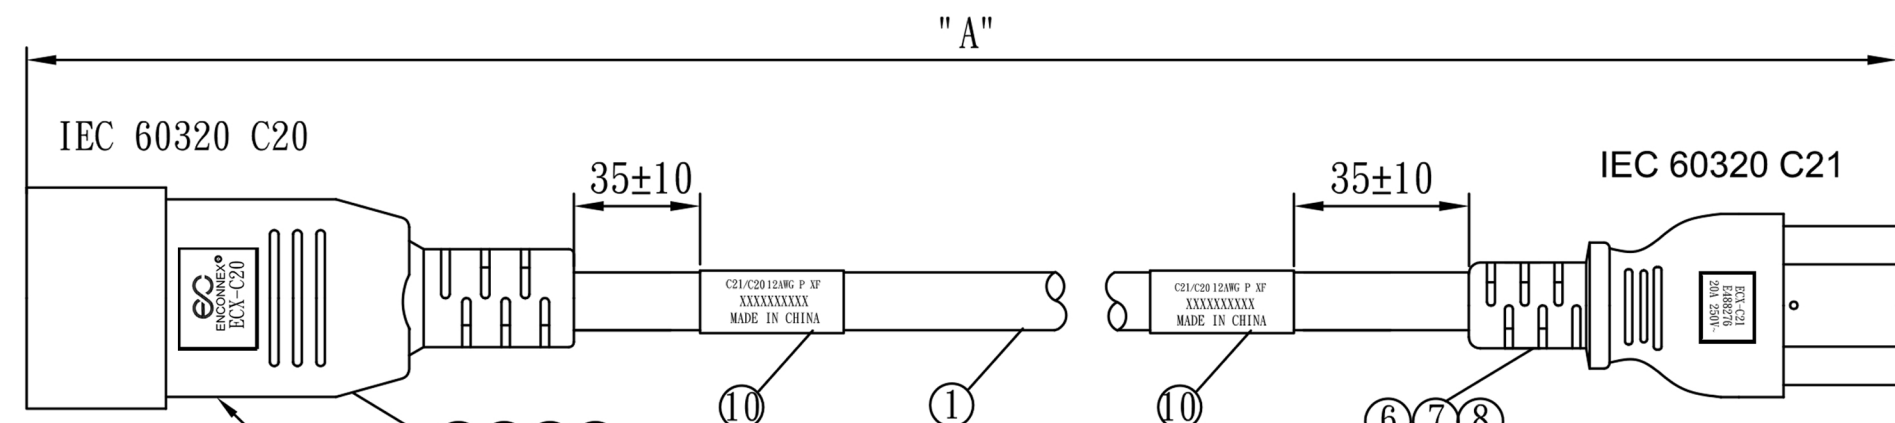


NOTES:

LENGTH:"A"	3FT	6FT	10FT
	915±30	1830±50	3050±50
PN	C21C20-20K12P-3FUL	C21C20-20K12P-6FUL	C21C20-20K12P-10FUL
LENGTH:"B"	180±30	220±30	220±30

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	FULL RELEASED	2023/4/13	ROBERT
B	THE SN ON THE LABEL HAS BEEN UPDATED FROM 13 CHARACTERS TO 10.	2023/6/5	ROBERT

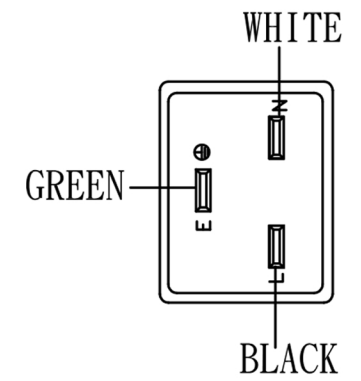

MARKING:
Enconnex LLC.c(UL)us E488277 SJT 3/C 12AWG(3.31mm²) 105°C 300V VW-1

NO.	SPECIFICATION	QTY.	REMARK
1	SJT 12/3C 105°C BLACK	1 PC	YL-230406
2	TER: 97606BS-1	2 PCS	
3	TER: 97607BS-1	1 PC	
4	YP-33 INNER BODY	1 PC	
5	YP-33 PVC PLASTIC: 50P BLACK	32g/PC	
6	YC-25 TER	3 PCS	
7	YC-25 INNER BODY	1 PC	
8	YC-25 PVC PLASTIC: 50P BLACK	25g/PC	
9	MINI TIE BLACK	1 PC	
10	LABEL: (40+35)*30mm	2 PCS	
11	BOX LABEL: 150*100mm	1 PC	

PROPRIETARY AND CONFIDENTIAL This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.	UNLESS OTHERWISE SPECIFIED X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	 4670 AIRCENTER CIRCLE RENO, NV 89502	DESCRIPTION: Power Cord, Black, C21/C20, 20 A, 12AWG, PVC, XXF Labeled C21/C20 12AWG P XXF		
	COMMENTS:		FINISH:	CLASS: N/A	SIZE: B
UNITS: mm [in]	INTERPRET TO ASME Y14.100	SCALE: N/A	WEIGHT:	SHEET: 1 OF 1	