

2 Post Rack - 48U

SKU#: ECX-19-2POST-48U-1224

The Enconnex 48U 2 Post equipment rack is an excellent solution for light weight and smaller format rack mounting needs. This cabinet is constructed of high-quality, rigid aluminum, and is ideal for a wide range of equipment from networking devices to small equipment that requires a shelf.

PRODUCT FEATURES

- Strong, rigid aluminum design
- Standard #12-24 threaded hole mounting is compatible with any 2-post accessories

PRODUCT APPLICATIONS

- Networking
- Telecommunications
- Real device testing

PRODUCT SPECIFICATIONS

- Two posts
- Standard 19" wide
- 48U rack with #12-24 threaded receiving holes

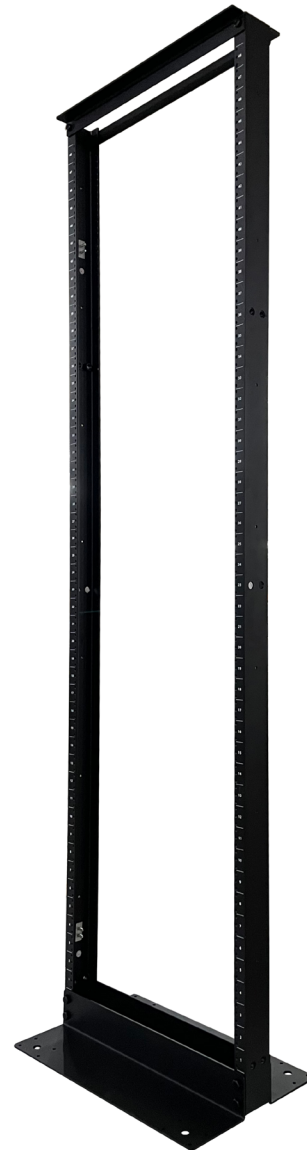


Figure 1 - 2 Post Rack - 48U

PHYSICAL SPECIFICATIONS

Physical	Specs
Dimensions (HxWxD)	89.97" x 20.32" x 14.97" (2285.35 mm x 516.2 mm x 380.2 mm)
Net Weight (lbs/kg)	41.89 lbs (19 kg)
Shipping Dimensions (HxWxD)	90.55" x 7.09" x 4.33" (2300 mm x 180 mm x 110 mm)
Shipping Weight (lbs/kg)	45.19 lbs (20.5 kg)
	Height: 48U
Equipment Space	Width: 19" EIA (17 3/4" clearance) Depth: 20" (508 mm)
Material	Aluminum (6063-T5) + CRS
Color	Black (RAL 9005)
Load Capacity (lbs/kg)	1500 lbs (680.4 kg)
	Top angles, base angles and side channels are electrically bonded by assembly hardware;
Bonding/Grounding	-A masked mounting location for ground lug with two M6 threaded studs spaced 16mm apart is provided inside the side channel -Racks that are over 6'H (1.8 m) have top and bottom mounting locations
Construction	Bolted assembly, Ships assembled
Certifications	EIA-310-D compliant