

[illegible]

RoHS COMPLIANT

REAR VIEW

RIGHT VIEW

FRONT VIEW

PLUG/RECEPTACLE BLOCK

PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPASHPROOF)
32A, 346-415V MAX RATED INPUT



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT

RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

16 AMP, SINGLE - POLE
ELECTRO MECHANICAL
SWITCH / BREAKER (6) PLACES, 5KA

BOTTOM VIEW


This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) $X \pm 1$ $X.X \pm 0.5$ $X.XX \pm 0.30$ $X.XXX \pm 0.10$ ANGULAR X° $X' \pm 0.5"$ $XX' \pm 0.25"$	MATERIAL:	 ENCONNEX 4670 AIRCENT CIRCLE, RENO, NV 89502	PART NUMBER: ECX-BV1730120-
	DESCRIPTION:		DESCRIPTION: 415V/32A, Three Phase, 42 ourtels, 30 C13, 12 C19, 50AIC breaker, IEC9309
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX INTERPRET TO ASME Y14.100	DRAWN BY: Leo Liu APPROVED BY: R. FAULKNER SIZE: A2 SCALE: 1:1	ORG DATE: 2019-06-19 REV DATE: SHEET: 1 REV: A
UNITS: mm [in]			

Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-06-19	RELEASE	



NOTES:
1. INTERNAL WIRING:
WIRE TYPE: UL AWM 1015, 12AWG
LINE 1/R/X COLOR: BROWN
LINE 2/S/Y COLOR: BLACK
LINE 3/T/Z COLOR: WHITE
EARTH GROUND COLOR: GREEN/YELLOW STRIPE
NEUTRAL WIRE COLOR: BLUE

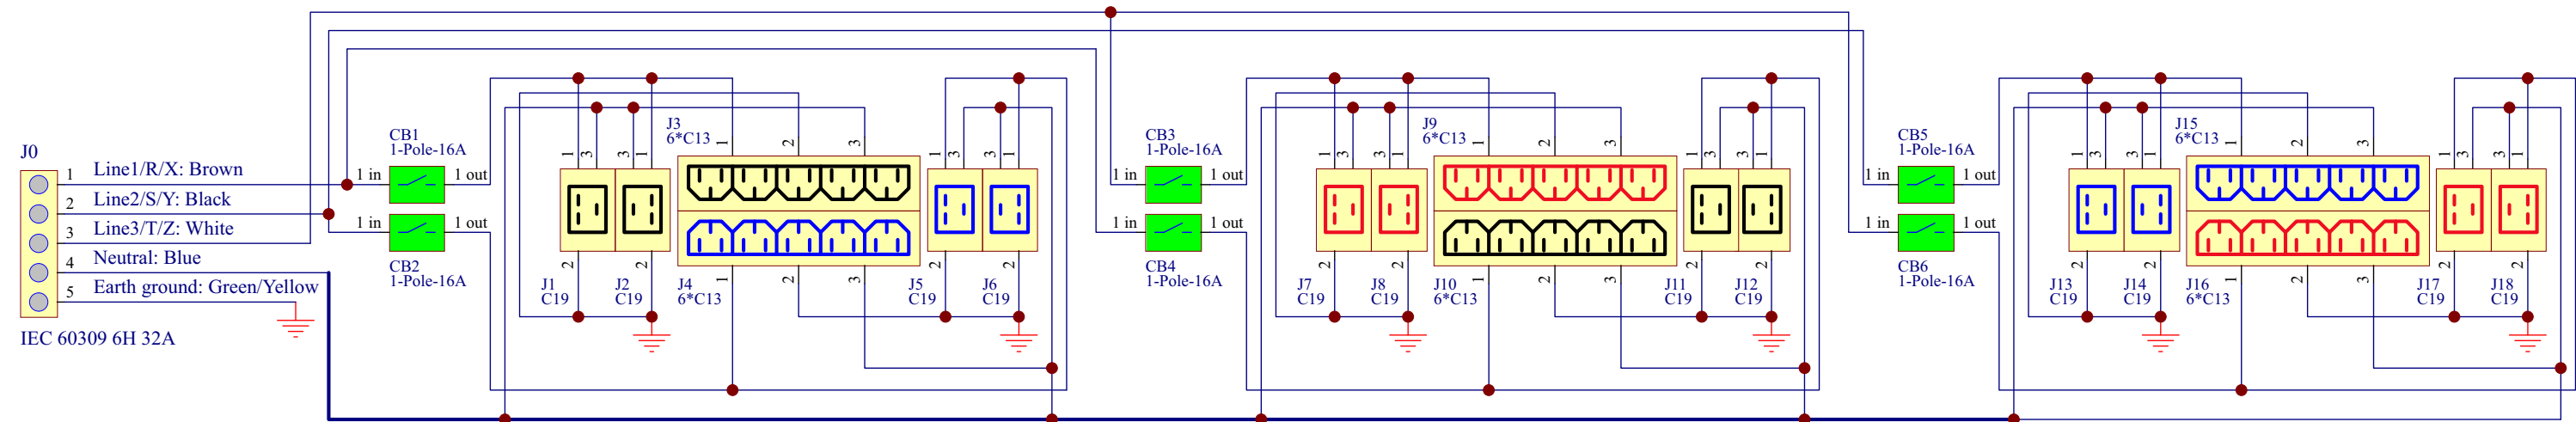

INTERNAL WIRING SCHEMATIC

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCES LINEAR (mm) X = ± 1 X.X = ± 0.5 X.XX = ± 0.30 X.XXX = ± 0.130 ANGULAR X = 1° .X = 0.5° .XX = 0.25°	MATERIAL:	 4670 AIRCENTER CIRCLE, RENO, NV 89502	PART NUMBER: ECX-BV1730120-T
	DESCRIPTION:		DESCRIPTION: Wiring Scheme
	DEBUR AND BREAK SHARP EDGES/CORNERS AT 0.2mm MAX	DRAWN BY: Jing Zhang	ORG DATE: 2019-06-19
	INTERPRET TO ASME Y14.100	APPROVED BY: R. FAULKNER	REV DATE:
UNITS: mm [in]		SIZE: A4	SCALE: 1 : 1
		SHEET: 2/2	REV: A