
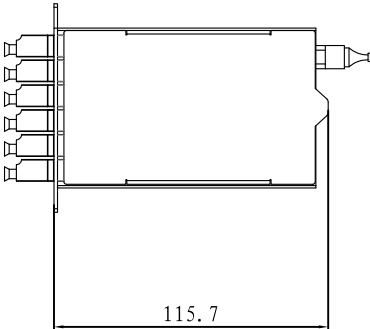



Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-02-19	RELEASE	SD/YZ

F



Fiber 1	Fiber 3	Fiber 5	Fiber 7	Fiber 9	Fiber 11
Blue	Green	Gray	Red	Yellow	Pink
Fiber 13	Fiber 15	Fiber 17	Fiber 19	Fiber 21	Fiber 23
Blue	Green	Gray	Red	Yellow	Pink
Fiber 2	Fiber 4	Fiber 6	Fiber 8	Fiber 10	Fiber 12
Orange	Brown	White	Black	Purple	Aqua
Fiber 14	Fiber 16	Fiber 18	Fiber 20	Fiber 22	Fiber 24
Orange	Brown	White	Black	Purple	Aqua

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCE/MATERIAL:

LINEAR (mm)
X => 1
.X => 0.5
.XX => 0.30
ANGULAR
X = 1°
.X = 0.5°
.XX = 0.25°

DESCRIPTION:



41424 Christy Street
Fremont, CA 94538

PART NUMBER:
ECX-1XMT-24LC
-OM3-HDC
DESCRIPTION:
ABCD-----



DEBUR AND BREAK SHARP
EDGES/CORNERS AT 0.2mm

UNITSmm [in] INTERPRET TO ASME Y14.1


DRAWN BY: SAM DING
APPROVED BY: JUAN ZHANG
DATE: 2019-02-19

A

F

Notes/Instructions:

REV	REV DATE	DESCRIPTION	APPROVAL
A	2019-02-19	RELEASE	SD /YZ

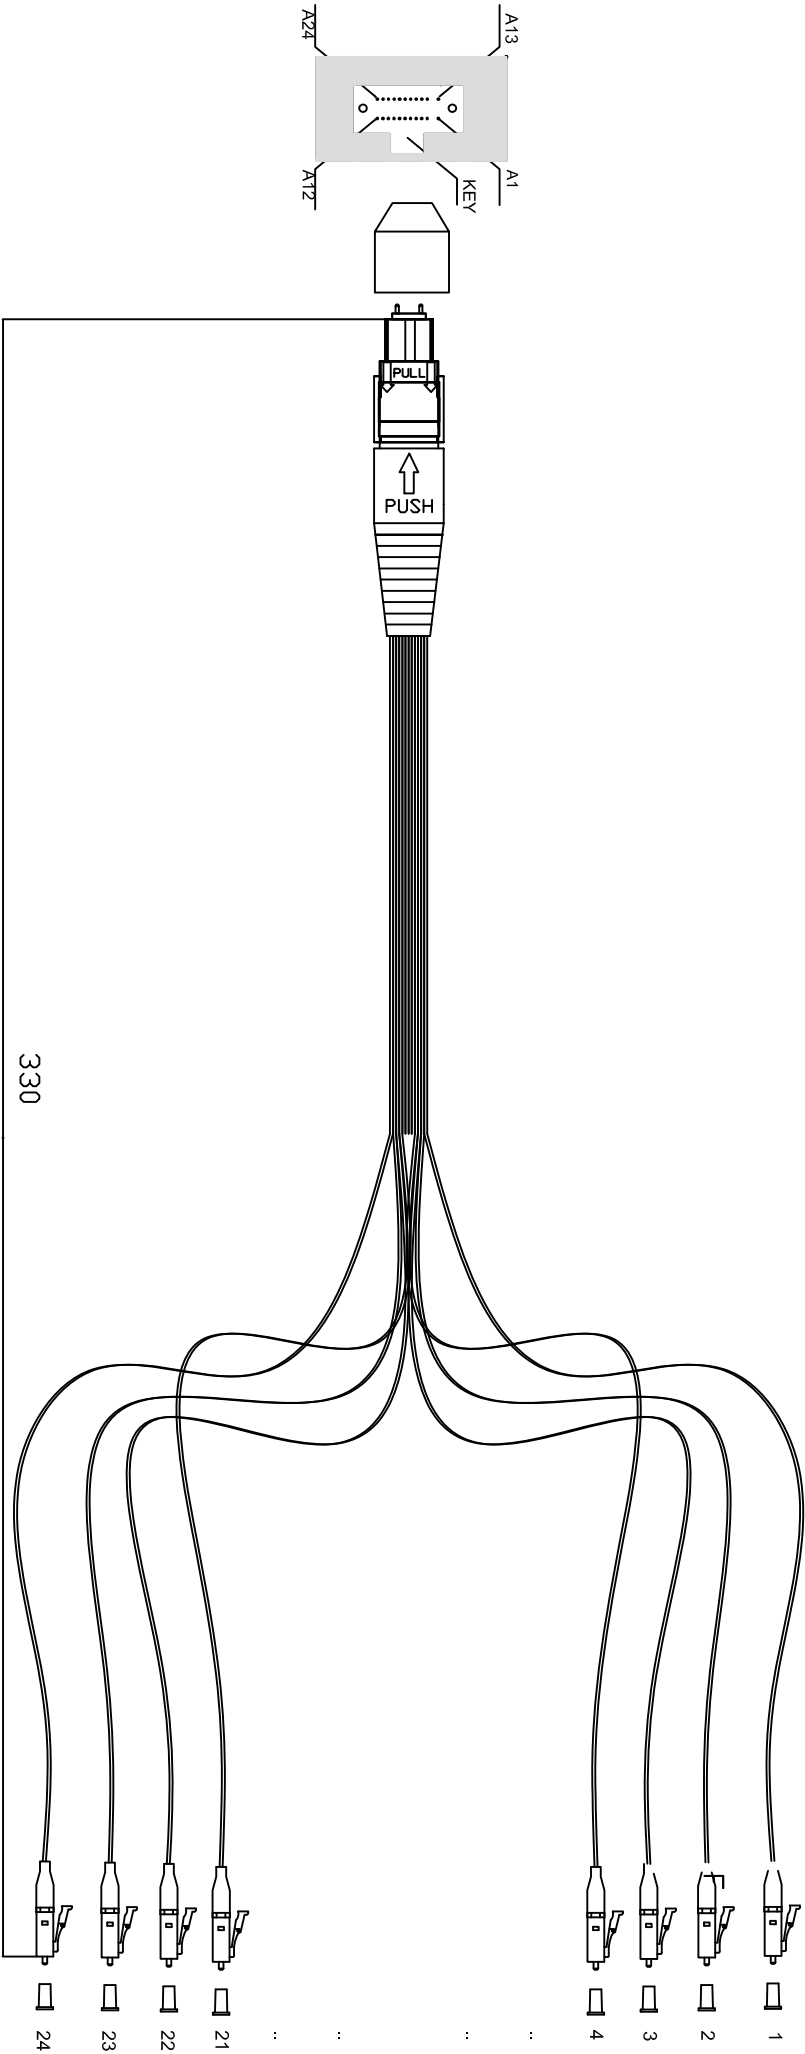

Technical Requirement

Item	Unit	Parameter
Operating Wavelength	nm	850-1300
Connector Type	-	MTP/PC (Male) LC/PC
Connector Color	-	Aqua Grey
IL	dB	≤ 0.5 ≤ 0.3
RL	dB	≥ 20 ≥ 20
Fiber Type	-	OM3-2
Fiber Brand	-	Corning
Cable Diameter	mm	0.6
Cable Color	-	12Color
Fiber Class	-	LSZH

Polarity Requirement

A/1 Blue	B/1 Blue	A/13 Blue	B/13 Blue
A/2 Orange	B/2 Orange	A/14 Orange	B/14 Orange
A/3 Green	B/3 Green	A/15 Green	B/15 Green
A/4 Brown	B/4 Brown	A/16 Brown	B/16 Brown
A/5 Grey	B/5 Grey	A/17 Grey	B/17 Grey
A/6 White	B/6 White	A/18 White	B/18 White
A/7 Red	B/7 Red	A/19 Red	B/19 Red
A/8 Black	B/8 Black	A/20 Black	B/20 Black
A/9 Yellow	B/9 Yellow	A/21 Yellow	B/21 Yellow
A/10 Purple	B/10 Purple	A/22 Purple	B/22 Purple
A/11 Pink	B/11 Pink	A/23 Pink	B/23 Pink
A/12 Aqua	B/12 Aqua	A/24 Aqua	B/24 Aqua

Notes:

This drawing and its specifications are the property of ENCONNEX and shall not be copied, reproduced, or used in whole or in part, as the basis for the manufacture or sale of items without written permission from ENCONNEX. This drawing is based upon the latest available information and is subject to change without notice.

TOLERANCE MATERIAL:

LINEAR (mm)
X => 1
X => 0.5
XX => 0.30
ANGULAR
X = 1°
X = 0.5°
XX = 0.25°

DESCRIPTION:




PART NUMBER:
ECX-1XMTP-24LC
-OM3-HDC
DESCRIPTION:
ABCD-----

41424 Christy Street
Fremont, CA 94538

DRAWN BY: SAM DING
APPROVED BY: ZHANGREV

DATE: 2019-02-19



DEBUR AND BREAK SHARP
EDGES/CORNERS AT 0.2mm

SIZE: A4 SCALE: 1:1 SHEET: 1/1 REV: A